DWG No 7746644-200 | REV A

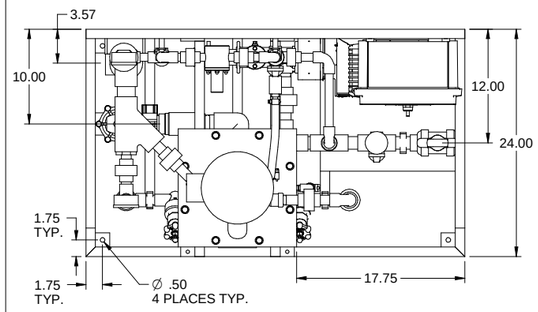

PLAN VIEW

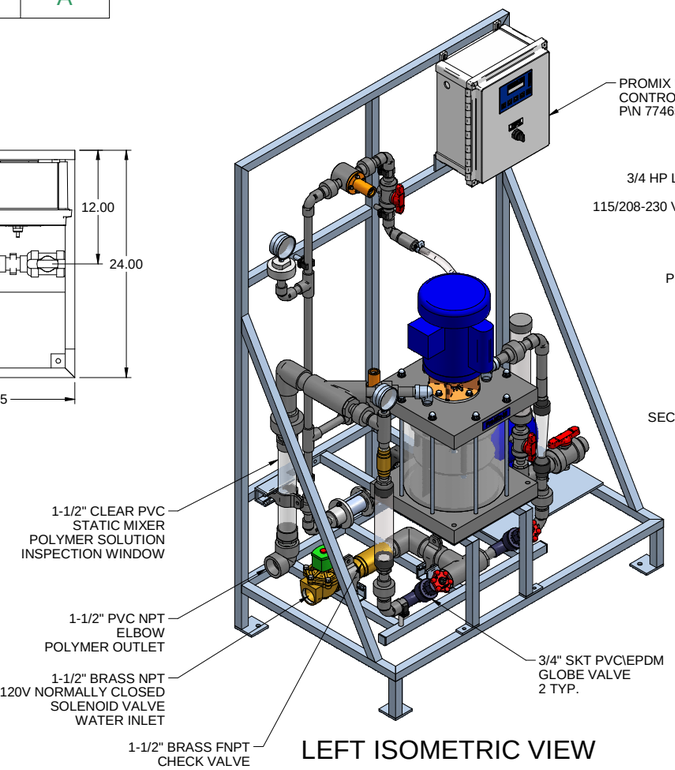

LEFT ISOMETRIC VIEW

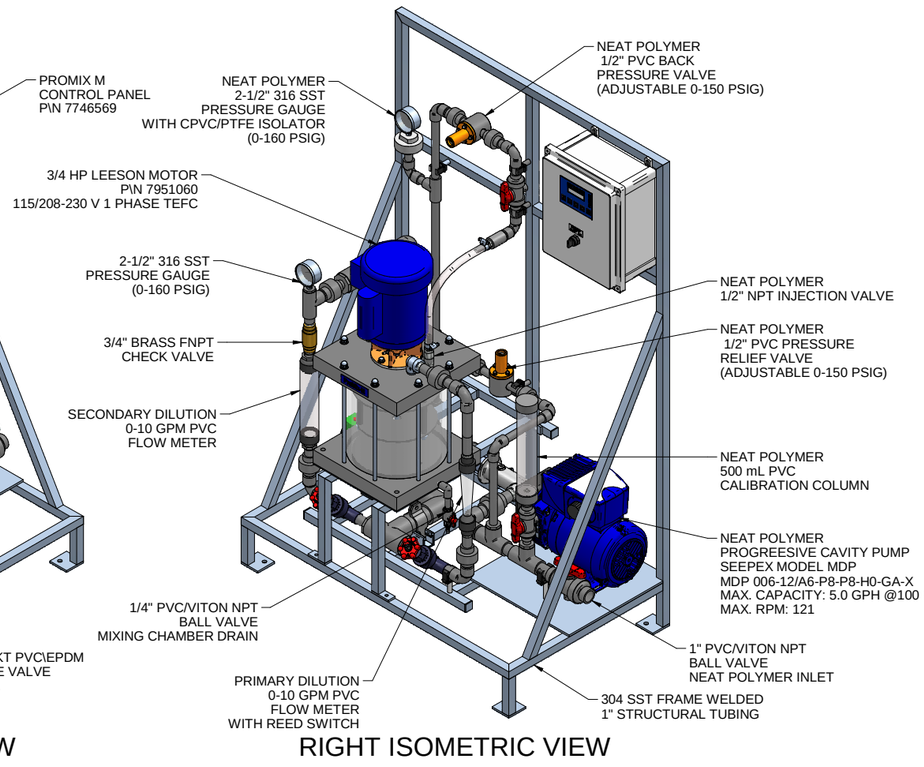

RIGHT ISOMETRIC VIEW

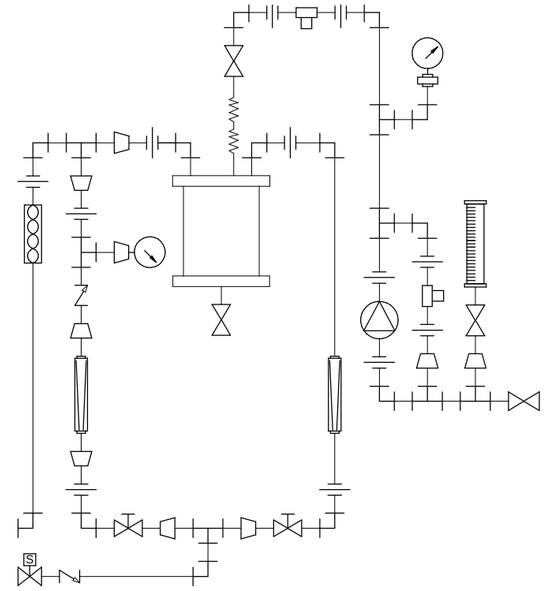

PIPING SCHEMATIC

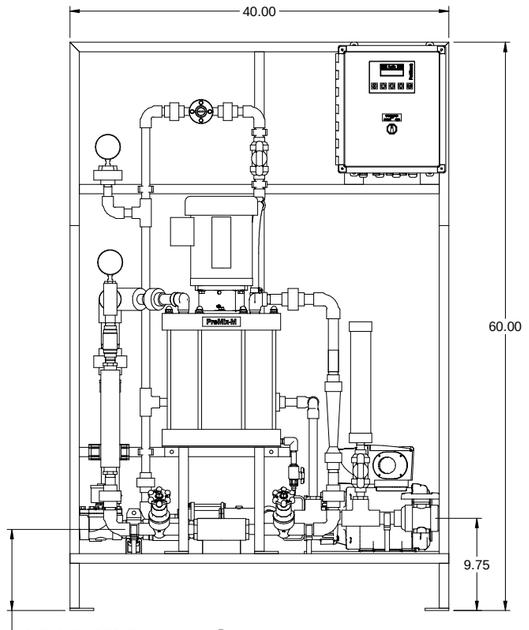

FRONT VIEW

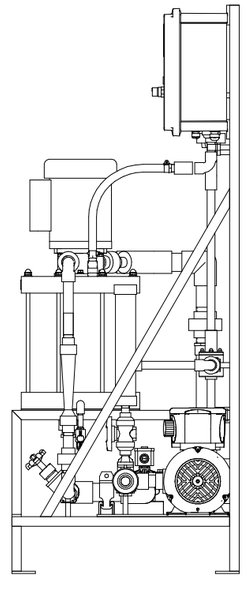

SIDE VIEW

NOTES:

1. ALL PIPING AND FITTINGS SHALL BE 1/2", 3/4", 1" AND 1-1/2" SCH. 80 PVC SOCKET WELD WITH VITON SEALS AS REQUIRED BY COMPONENTS.
2. EMULSION POLYMER BLENDING SYSTEM WITH THREE ZONE PVC MIXING CHAMBER.
3. REQUIRED INCOMING POWER:

   120VAC, 60HZ, 1 PHASE, 20 AMP CURRENT RATING AT 120 VAC
4. ALL DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR REFERENCE ONLY.
5. SEEPEX PUMP MUST BE INSTALLED SO THAT IT HAS A FLOODED SUCTION. DO NOT RUN THE SEEPEX PUMP DRY.

REV	DATE	DESCRIPTION	BY	APPD	REVD
A	01/26/11	REMOVED SELF FILL OPTION	GJS		
0	09/24/10	FIRST ISSUE	GJS		

REVISIONS

CUSTOMER: PROMINENT FLUID CONTROLS INC. (PROMIX M SYSTEM)

JOB No: 7746644 | PURCHASE ORDER No: N\A

TITLE: PROMIX M_0-600X2-5.0PA SYSTEM SKID GENERAL ARRANGEMENT

THIS DRAWING IS THE PROPERTY OF PROMINENT FLUID CONTROLS INC. AND SHALL NOT BE COPIED OR TRANSFERRED WITHOUT THE WRITTEN CONSENT OF PROMINENT FLUID CONTROLS INC.

ENGINEERS SEAL

ProMinent® THE PROMINENT GROUP OF COMPANIES

PITTSBURGH, PA USA WWW.PROMINENT.US

PROMINENT FLUID CONTROLS LTD.
490 SOUTHGATE DRIVE.
GUELPH, ONTARIO, CANADA
N1H 6J3
TEL. 519 836 5692 FAX. 519 836 5226

PROMINENT FLUID CONTROLS INC.
RIDC PARK WEST
136 INDUSTRY DRIVE,
PITTSBURGH P.A., USA. 15275
TEL. 412 787 2484 FAX. 412 787 0704

DESIGNED	GJS
DRAWN	GJS
CHECKED	JMS
APPROVED	
SCALE	N.T.S.
DATE	09/24/10

MAXIMUM TESTING PRESSURE =	150 PSI
MAXIMUM OPERATING PRESSURE =	100 PSI
CHEMICAL SERVICE =	POLYMER

DWG No 7746644-200 | REV A | PAGE 1/1