

Pre-engineered Tower Packages

Corrosion monitoring system



ProMinent® introduces a new pre-engineered panel system for mounting chemical feed controllers. These panels will accommodate all ProMinent® Tower Controllers. The wall-mounted panels are equipped with 3/4" PVC piping and fittings.

Features & Benefits

- 3/4" PVC sch 80, Maximum 150 psi / 120 oF
- Mounted on 3/8" PE backplane
- Chemical injection ports
- Y-strainer standard on all models
- Controller and Sensors ordered separately

Applications

- Cooling Water
- Condensate Loops
- Chiller Systems

Options

- Rotameter, 10 GPM
- Check Valve
- Dole Valve, 5 GPM
- Globe Valve
- Pump Shelf




Wall-mounted Pump Shelf

Pre-engineered Tower Packages

Package Description

Part Number	Panel Description	Inlet	Options	*Controller Orientation
7746460	Single Tower, Inlet/Outlet same	Left	none-basic	Right side
7746555	Single Tower, Inlet/Outlet same	Right	none-basic	Left side
7746461	Single Tower, Inlet/Outlet same	Left	10 gpm rotameter	Right side
7746556	Single Tower, Inlet/Outlet same	Right	10 gpm rotameter	Left side
7746462	Single Tower, Inlet/Outlet opposite	Left	none-basic	Left side
7746557	Single Tower, Inlet/Outlet opposite	Right	none-basic	Right side
7746463	Single Tower, Inlet/Outlet opposite	Left	10 gpm rotameter	Left side
7746558	Single Tower, Inlet/Outlet opposite side	Right	10 gpm rotameter	Left side

Dimensional Drawings

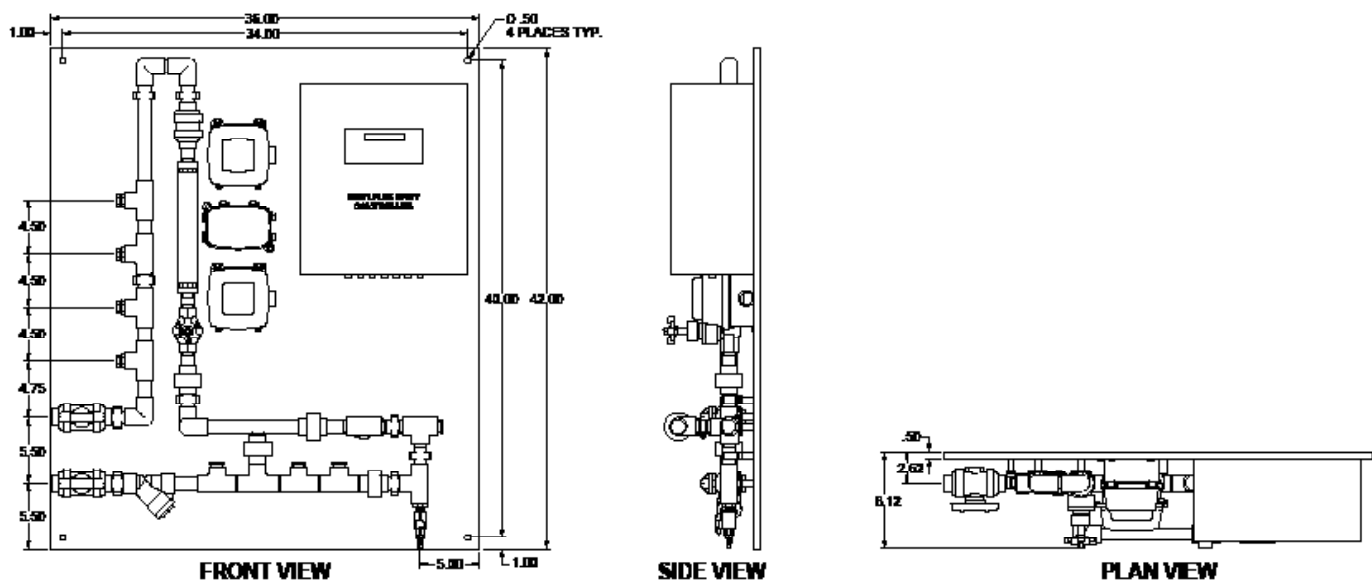

ProMinent Fluid Controls, Inc.
 136 Industry Drive • Pittsburgh, PA 15275 USA
 (412) 787-2484 • Fax: (412) 787-0704
 email: sales@prominent.us • www.prominent.us

© 2013 ProMinent Fluid Controls, Inc. All Rights Reserved.

PN: 7750404
 DulcoFlex_DFA.indd rev1 06/05/2013