


microFlex Alarm Relay Option

1 WIRING ALARM CONTACTS

Alarm contacts rated 500mA at 24VDC.
Requires optional Alarm Relay Card

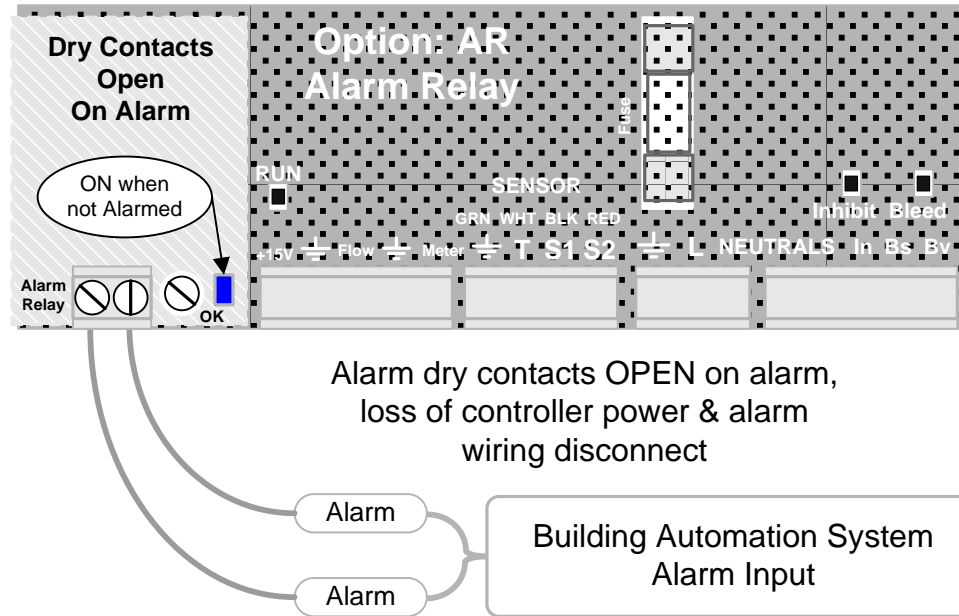

Wire alarm contacts AWG22 to
AWG18, 2 conductor

2 ALARM DISPLAYS

Press UP - DOWN until you see Alarms

If the Alarm Relay Card is installed you'll see one of the following displays.

If Alarms & 'none' then the alarm contacts will be closed

Alarm contacts open on alarm.

This display verifies the contact set state measured at the Building Automation System input terminals.

Al arms
none



Al arm Contacts
CLOSED, No Al arm

OR

Al arm Contacts
OPEN, Al arm