

DulcoFlex DFD Series

High flows and high pressures with the DFD series pumps

The **DulcoFlex DFD** is a hose pump designed for pressures up to **232 psi** and flow rates up to **225 gpm**. The unique shoe design is made of steel for smoother and cooler compression. The **DFD** uses safe **DulcoLube** oil for the shoe lubrication. With suction lifts up to **29 feet**, the **DulcoFlex DFD** is a great choice for difficult pumping applications.

Applications

- Sludge transfer
- Lime slurry
- NaOCl transfer
- Inks
- Dyes
- Acids
- Caustics
- Wine barrel filling
- Water & Waste water
- Chemicals
- Breweries & Wineries
- Pulp & Paper




Features & Benefits

- Sizes: 25, 32, 40, 60, 70, 100mm
- Flows to 225 gpm
- Suction lifts up to 29 ft.
- Disaster proof hose connections
- DulcoLube food grade glycerin lubricant
- Designed heat sink fins for cooler operation
- Steel shoes for a smoother and cooler compression
- Run dry capabilities

DulcoFlex DFD Series

DFD Series Flow Rates

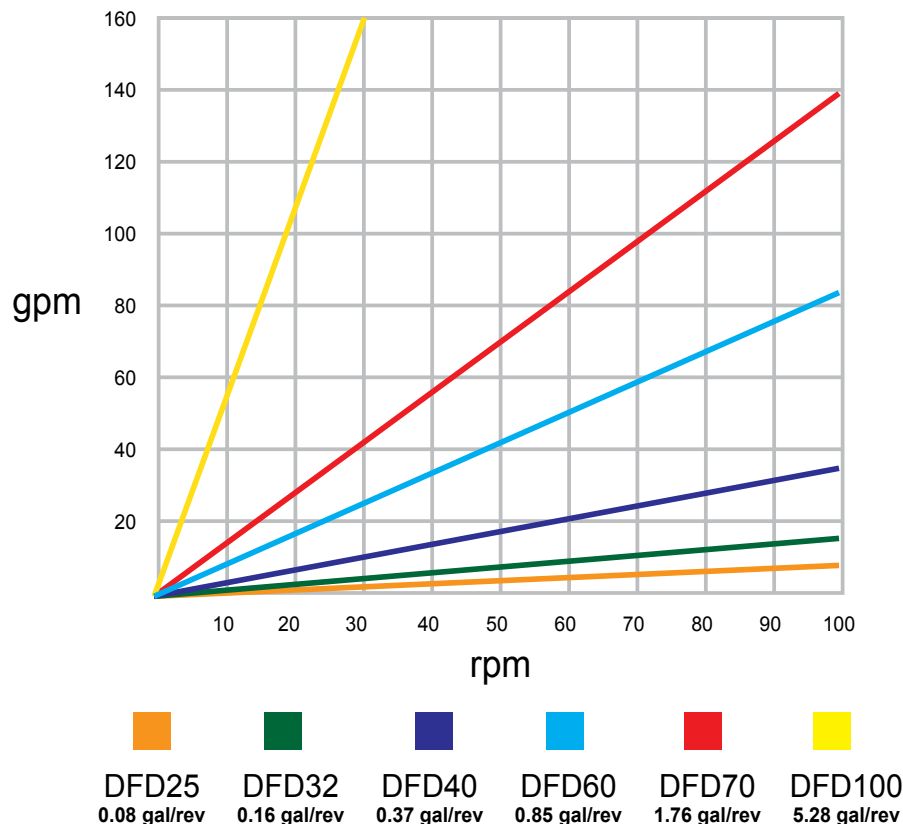

Pump Capacities

	DFD25	DFD32	DFD40	DFD60	DFD70	DFD100
Compression	Shoe	Shoe	Shoe	Shoe	Shoe	Shoe
Connection	1"	1 ½"	1 ½"	2 ½"	2 ½"	4"
Capacity gal/rev	0.08	0.16	0.37	0.85	1.76	5.28
Max Flow gpm	12	20	30	84	130	225
Reinforced Hoses	Natural Rubber Nitrile Buna Rubber EPDM			Hypalon Natural Rubber Food Grade Nitrile Buna Rubber Food Grade		
Max Pressure Reinforced Hose	232 psi	232 psi	232 psi	232 psi	232 psi	232 psi