

# ProMix™-C Polymer Blending System

ProMinent®

## New Compact Design

The **ProMinent ProMix™** is a pre-engineered polymer mixing system made for the water and wastewater markets. Designed as an in-line unit, the **ProMix™** can be customized to meet most liquid polymer applications utilizing tubing pump technologies. The unique mixing chamber allows for complete makedown of the neat or diluted polymer to guarantee a problem-free injection.

## Applications

- Emulsion or Dispersion polymer activation
- Coagulant or Solution polymer feed
- Water and Wastewater treatment
- Clarification
- Sludge Dewatering

## Features & Benefits

- Open design for easy maintenance
- True multi-zone mixing regime for proper polymer activation
- Unique injection check valve with easy access for cleaning
- Adjustable auto flush settings
- System protection against loss of water flow
- Precise activated polymer solution delivery
- LCD display with touchpad control
- 4-20mA input to pace pump
- Remote start/stop
- General alarm contacts

## Specifications

- Water Inlet: 3/4" FNPT
- Polymer Inlet: 1/2" FNPT
- Product Outlet: 3/4" FNPT
- Max. Chamber Pressure: 150 PSIG
- Max. Operating Pressure: 100 PSIG
- Power Supply: 120 VAC, 1 Phase, 60Hz
- Current Load: 15 Amp
- Drain Connection: 1/4"



**ProMinent®**

Visit our XTRANET <[www.prominentxtranet.com](http://www.prominentxtranet.com)> to:


- sign up for our electronic newsletter
- download literature and manuals
- validate your product warranty

# ProMix™-C Polymer Blending System

## Capacity data

ProMix™-C Series P/N	Model Number	Primary Dilution gph	Primary Rotameter (gpm)	Secondary Dilution gph	Secondary Rotameter (gpm)	Peristaltic Pump gph	Max Pump Pressure psi
7746772	60-0.21TA	60	1	-	-	0.21	100 psi
7746773	60x2-0.71TA	60	1	60	1	0.71	100 psi
7746774	180x2-0.71TA	180	3	120	2	0.71	100 psi
7746775	180x2-1.67TA	180	3	120	2	1.67	80 psi
7746776	300x2-2.50TA	300	5	300	5	2.50	25 psi
7746777	300x2-3.54TA	300	5	300	5	3.54	25 psi

## Dimensional Drawings

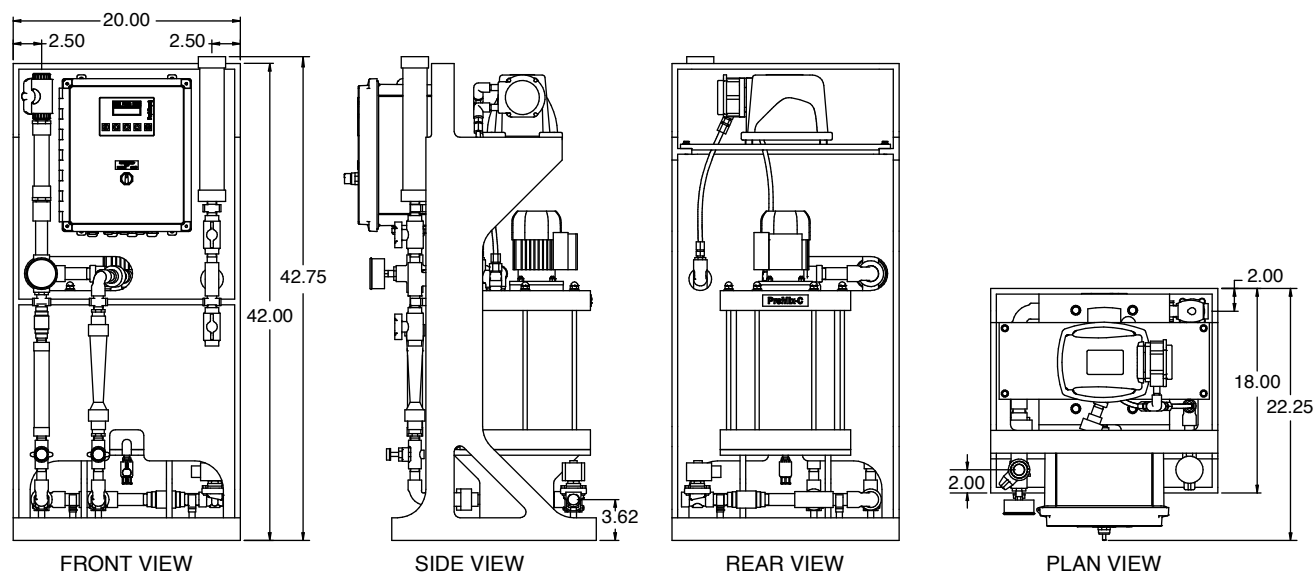

**ProMinent®**

ProMinent Fluid Controls, Inc. (US)  
 136 Industry Drive  
 Pittsburgh, PA 15275-1014  
 Tel: (412) 787-2484  
 Fax: (412) 787-0704  
 eMail: [sales@prominent.us](mailto:sales@prominent.us)  
[www.prominent.us](http://www.prominent.us)

ProMinent Fluid Controls Ltd. (Canada)  
 490 Southgate Drive  
 Guelph, ON N1G 4P5  
 Tel: 1-888-709-9933 | (519) 836-5692  
 Fax: (519) 836-5226  
 eMail: [sales@prominent.ca](mailto:sales@prominent.ca)  
[www.prominent.ca](http://www.prominent.ca)