

DULCOMETER Instrumentation

Table of Contents

“DULCOMETER Instrumentation” T.O.C.

VIII

CATALOG SECTION TABS

product overview

- Introduction
- Pump selection by capacity
- Chemical resistance list
- Solenoid & Motor Pump Overview
- Analytical Instrumentation Overview

solenoid-driven metering pumps

- Concept b
- Beta b
- gamma/ X
- delta
- gamma/ XL
- Extronic

motor-driven metering pumps

- Sigma/ X: Sigma/ 1
- Sigma/ X: Sigma/ 2
- Sigma/ X: Sigma/ 3
- ProMus
- Hydro 2 API 675
- Hydro 3 API 675
- Makro
- Orlita
- DULCOFLEX

pump spare parts & accessories

- Solenoid pump spare parts
- Motor pump spare parts
- Pump accessories

DULCOMETER instrumentation

- D1Cb/c
- DACb
- Dulcometer Compact
- DMT
- MicroFlex
- MultiFlex
- AEGIS X
- AEGIS II
- SlimFlex 5

DULCOTEST sensors

- Amperometric sensors
- Potentiometric sensors
- Potentiostatic sensors
- Conductometric sensors
- Accessories

polymer blending & dry feed solutions

- ProMix™ -M (In-line Controls)
- ProMix™ -M (Batch & In-line Controls)
- ProMix™ -S
- ProMix™ -C
- ProMdry™

product
overviewsolenoid-driven
metering pumpsmotor-driven
metering pumpspump spare parts &
accessoriesDULCOMETER
instrumentationDULCOTEST
sensorspolymer blending &
dry feed solutions

ProMinent® DULCOMETER Analyzers

DULCOMETER Measuring and Control Units

DULCOMETER measuring and control units combine maximum process safety with a broad application spectrum. Different measured variables can be accurately determined. Depending on the application, the control behavior of DULCOMETER measuring and control unit is adapted to meet the relevant application. Different designs permit flexible use.

- Advantages at a glance:
- High measuring reliability, e.g. thanks to symmetrical input for pH/ORP
- High measuring accuracy, e.g. thanks high-impedance input for pH/ORP
- Minimum disturbance, e.g. thanks to alternating current disturbance suppression
- Two-wire technology for disturbance-resistant measurement
- Highly versatile thanks to many options and different designs

DULCOMETER measuring and control units, DULCOTEST sensors with ProMinent® metering pumps - the complete control cycle, measuring-controlling-metering and recording, everything from one single source, perfectly coordinated.

| Function | Compact Controller | D1Cb | D1Cc | DACb |
|---|--------------------|------|------|--------|
| Control outputs | | | | |
| Control of metering pump by pulse frequency | ✓ | ✓, 2 | ✓, 2 | ✓, 2/4 |
| Control of solenoid valve/motor-driven metering pump | ✓ | ✓ | ✓ | ✓ |
| Interference variable processing (flow) via mA | | | | ✓ |
| Interference variable processing flow via frequency (e.g. of contact water meter) | | | | ✓ |
| Metering time monitoring with deactivation of the control variable | ✓ | ✓ | ✓ | ✓ |
| Output relay configurable as limit value relay | ✓, 1 | ✓, 2 | ✓, 2 | ✓, 2 |
| Cycle timer | | ✓, 2 | ✓, 2 | ✓, 2 |
| Real time timer | ✓, 2 | | | |
| Outputs | | | | |
| Analog output 0/4-20 mA | ✓, 1 | ✓, 1 | ✓, 1 | ✓, 2/3 |
| Outputs | | | | |
| Data logger with SD card | | | | ✓ |
| Web server via LAN | | | | ✓ |
| Parameter set switch-over via timer | | | | ✓ |
| Parameter set switch-over via contact | | | | ✓ |
| PROFIBUS® DP | | | | ✓ |
| Modbus RTU | | | | ✓ |
| Subsequent extension of functions via enabling code | | ✓ | ✓ | ✓ |
| Operating hour counter | | ✓ | ✓ | ✓ |

ProMinent® DULCOMETER Analyzers

DULCOMETER Measuring and Control Units

| Function | Compact Controller | D1Cb | D1Cc | DACb |
|---|--------------------|------|------|-------------------|
| Measured variable | | | | |
| pH | ✓ | ✓ | ✓ | ✓ |
| ORP | ✓ | ✓ | ✓ | ✓ |
| Chlorine | ✓ | ✓ | ✓ | ✓ |
| Chlorine dioxide | | ✓ | ✓ | ✓ |
| Chlorite | | ✓ | ✓ | ✓ |
| Bromine | | ✓ | ✓ | ✓ |
| Conductivity, conductive | ✓ | | | ✓ |
| Conductivity, inductive | ✓ | | | |
| Conductivity via mA | | ✓ | ✓ | ✓ |
| Peracetic acid | | ✓ | ✓ | ✓ |
| Hydrogen peroxide | | ✓ | ✓ | ✓ |
| Ozone | | ✓ | ✓ | ✓ |
| Dissolved oxygen | | ✓ | ✓ | ✓ |
| Fluoride | | ✓ | ✓ | |
| 0/4-20 mA standard signal general measured variables | | ✓ | ✓ | ✓ |
| Power Supply | | | | |
| 90-253V | ✓ | ✓ | ✓ | |
| ~24 V DC | | | | ✓ |
| Method of installation, degree of protection | | | | |
| Wall mounted IP 65 | | ✓ | | |
| Panel mounted, IP 54 | | | ✓ | |
| Combination housing (wall-mounting, pillar assembly) IP 66 + IP 67. Installation on control | ✓ | | | ✓ |
| Measurement | | | | |
| Number of measuring channels | 1 | 1 | 1 | 2 or 3 optionally |
| Sensor monitoring of pH | ✓ | ✓ | ✓ | ✓ |
| Temperature compensation for pH | ✓ | ✓ | ✓ | ✓ |
| Temperature compensation for conductivity | ✓ | | | |
| pH compensation for chlorine | | | | ✓ |
| Control | | | | |
| PID controller | ✓ | ✓ | ✓ | ✓ |
| Monodirectional controller (ex. with pH acid or | ✓ | | | ✓ |
| Bidirectional controller (ex. with pH acid or alkali) | | ✓ | ✓ | ✓ |
| Control Inputs | | | | |
| Digital control inputs | ✓, 1 | ✓, 1 | ✓, 1 | ✓, 4/7 |


ProMinent® D1Cb and D1Cc Analyzers

D1Cb/D1Cc Single Channel Controller

- Flexibly upgradable thanks to subsequent activation option for functions by means of activation code
- Equipped for the essential basic requirements in water treatment
- Large, illuminated graphic display
- Operator guidance with clear text menu available in 14 languages in the controller
- Automatic buffer detection for pH
- **Standard configuration**
- The following functions are included in the D1Cb/D1Cc controller (the measured variables depend on the type of connection of the measured variable)
 - Sensor monitoring for pH
 - Switchable between all measured variables via mV or mA
 - 2 power relays for limit value monitoring or timer functions
 - Metering time monitoring with switch-off of the control variable
 - Extended range voltage supply: 90-253 V, 50/60 Hz
 - mA sensor input safely protected against short-circuit and polarization reversal
 - Method of installation, wall mounting: D1Cb
 - Method of installation, control panel: D1Cc
- **Applications**
 - Waste water treatment
 - Cooling water treatment
 - Treatment of potable water
 - Neutralization

ProMinent® D1Cb and D1Cc Analyzers

Technical Data



Wall Mount



Panel Mount

Measurement range:

Type of connection mV:

pH 0.00 ... 14.00

ORP +1000 mV

Type of connection mA:

Chlorine: 0.00...0.500/2.00/5.00/10.0/20.0/50.0/100.0 ppm

Chlorine dioxide: 0.00...0.500/2.00/10.0/20.0 ppm

Chlorite: 0.02...0.50/0.1...2 ppm

Bromine: 0.02...2.0/0.1...10.0 ppm

Ozone: 0.00...2,00 ppm

Hydrogen peroxide, sensor PER1: 2.0...200.0/20...2,000 ppm

Hydrogen peroxide, sensor PEROX: 0...20/200/2,000 ppm, 1 vol. %

Peracetic acid: 1...20/10...200/100...2,000 ppm

Dissolved oxygen: 0.1...10/0.1...20 ppm

pH: 0.00...14.00

ORP: 0...+1000 mV

Conductivity: 0...20/200/1,000 mS/cm

Resolution:

pH: 0.01 pH / ORP: 1 mV

Amperometric 0.001/0.01 ppm/l/0.1 %

Accuracy:

0.5 % from measurement range

Measurement input:

SN6 (input resistance > 0.5 x 10¹² Ω)

Correction variable:

Temperature via Pt 100 (conductivity or PT1000)

Correction range temp.:

50 - 113 °F (10 - 45°C) (pH and conductivity only)

Control characteristic:

P/PID control

Control:

2-way control

Signal current output:

1 x electrically isolated 0/4-20 mA

max. load 450 Ω

Adjustable range and direction (measured, correction and control variable)

Control outputs:

2 reed contacts (pulse rate, for pump control)

2 relays (pulse length, 3P or limit value)

1 x 0/4-20 mA

Alarm relay:

250 V~3 A, 700 VA changeover contact

Power supply:

90 - 253 V, 50/60 Hz

Ambient temperature:

Wall mounted: 23 - 122°F (-5 - 50°C)

Mounting

- **Wall mount:** Nonmetallic enclosure with protective gland-style strain relief cable sockets
- Dimensions: 7.79"H x 7.87"W x 3.00"D (198 mm x 200 mm x 76 mm)
- Weight: Approx. 2.6 lbs. (1.2 kg) Shipping Weight: 4.4 lbs. (2.0 kg)
- Mounting: Detachable wall mount bracket
- Protection class: NEMA 4X (IP 65)
- **Panel mount:**
- Dimensions: 3.78"H x 3.78"W x 5.70"D (96 mm x 96mm x 145 mm)
- Protection class: NEMA 3 (IP 54) when mounted in panel

ProMinent® D1Cb and D1Cc Analyzers

Specifications

Temperature data (Panel Mount)

Permissible ambient temperature

Basic version:

Control panel installation: 32° to 122°F (0° to 50°C)

Installation in wall-mounted housing: 23° to 113°F (-5° to 45°C)

Extended version (with status feed-back or with correction value via mA or with disturbance variable via mA):

Control panel installation: 32° to 113°F (0° to 45°C)

Installation in wall-mounted housing: 23° to 104°F (-5° to 40°C)

Control panel installation: 14° to 158°F (-10° to 70°C)

Permissible storage temperature:

Material data/chemical resistance:

Part

Housing and frame

Rear panel

Membrane keypad

Seal, outside

Seal, inside

Retaining clip and screws

Material

PPO GF 10

PPE GF 20

Polyester film PET

Cellular rubber CR

Silicon-based sealing compound

Galvanized steel

Temperature data (Wall Mount)

Permissible ambient temperature

Basic version:

23° to 122°F (-5° to 50°C)

Installation in wall-mounted housing: 23° to 113°F (-5° to 45°C)

Extended version (with status feed-back or with correction value via mA or with disturbance variable via mA):

23° to 104°F (-5° to 40°C)

14° to 158°F (-10° to 70°C)

Permissible storage temperature:

Material data/chemical resistance:

Part

Housing

Membrane keypad

Housing seal

Outer seal

Retaining bracket

M5 screws

Material

Luranyl PPE GF 10

Polyester film PET

Cellular rubber CR

Cellular rubber CR

Galvanized steel

A2

Standards:

Supply voltage in accordance with DIN IEC 38

Electrical safety in accordance with EN 61010-1

Electromagnetic emitted interference in accordance with EN 55011 Gr.1/C1.A

CSA special inspection

Electrical data:

Rated voltage:

Max. power input:

Internal fuse protection:

Panel Mount

115/230 VAC, 50/60 Hz

140 mA at 115 V

70 mA at 230 V

Fine-wire fuse 5 x 20 mm

250 V slow-blow

100-115 V = 315 mA

200-230 V = 160 mA

Wall Mount

115/230 VAC, 50/60 Hz

120 mA at 115 V

60 mA at 230 V

Fine-wire fuse 5 x 20 mm

250 V slow-blow

100-115 V = 315 mA

200-230 V = 160 mA

Rated voltage:

Max. power input:

Internal fuse protection:

Fine-wire fuse 5 x 20 mm

250V slow-blow

100-115 V = 315 mA

200-230 V = 160 mA

Electrical data for both wall mount and panel mount D1C's

Rated voltage:

Internal fuse protection:

24 VDC or 24 VAC, 50/60 Hz (low voltage operation only)

Fine-wire fuse 5 x 20 mm

250 V slow-blow, 100-115 V = 315 mA, 200-230 V = 160 mA

ProMinent® D1Cc and D1Cc Analyzers

Specifications (cont.)

| | | |
|--------------------------------|--|---|
| product overview | Sensor input via SN6 socket: | Input impedance: $> 10^{12} \text{ W}$ Input impedance with reference electrode with respect to: Device ground: $< 1 \text{ kW}$ Input range: $\pm 1 \text{ V}$ Accuracy: $\pm 0.5\%$ of input range Resolution: 0.0625% of input range Connection facility for one potential equalization electrode (solution ground). As an alternative, two connection terminals can be connected with a wire jumper. |
| | Sensor input via terminals: | Input impedance: $> 5 \times 10^{11} \text{ W}$ Input impedance with reference electrode with respect to: Device ground: $< 1 \text{ kW}$ Input range: $\pm 1 \text{ V}$ Accuracy: $\pm 0.5\%$ of input range Resolution: 0.0625% of input range Connection facility for one potential equalization electrode (solution ground). As an alternative, two connection terminals can be connected with a wire jumper. |
| | Standard signal input for measured variable: | Input range: $0/4...20 \text{ mA}$ (programmable) Input impedance: 50 W (Panel Mount) and (Wall Mount) Accuracy: 0.5% of input range Resolution: $0.014/0.012 \text{ mA}$ Supply voltage and current for external electronics: $20 \text{ V} \pm 0.5 \text{ V}$, 20 mA |
| | Standard signal input for correction measured value or disturbance variable mA: | Galvanically isolated from remaining inputs and outputs Insulation voltage: 500 V Input range: $0/4...20 \text{ mA}$ (programmable) Input resistance: 50 W Accuracy: 0.5% of input range Resolution: $0.014/0.012 \text{ mA}$ Supply voltage and current for external electronics: $23 \text{ V} \pm 1 \text{ V}$, 20 mA (Panel) $19 \text{ V} \pm 1.5 \text{ V}$, 20 mA (Wall) |
| | Pt100 input: | Input range: $32^\circ \text{ to } 212^\circ \text{ F}$ ($0^\circ \text{ to } 100^\circ \text{ C}$) |
| | Pt1000: | Accuracy: $\pm 0.5^\circ \text{ C}$ Resolution: 0.1° C |
| | Digital inputs: | Common reference potential with respect to each other and with the RS 232 interface, but galvanically isolated from remaining inputs and outputs Insulation voltage: 500 V (Wall Mount only) |
| | Status signaling input: | Galvanically isolated from remaining inputs and outputs Insulation voltage: 500 V Potentiometer to be connected: $800 \text{ W} \dots 10 \text{ kW}$ Accuracy (without potentiometer error): 1% of input range Resolution: 0.5% of input range |
| | Current output: | Galvanically isolated from remaining inputs and outputs Insulation voltage: 500 V (Wall Mount only) Output range: $0/4...20 \text{ mA}$ (programmable) Maximum load: 600 W Accuracy: 0.5% of output range with respect to displayed value |
| | Frequency outputs (Reed relay) | Type of contact: n/o contact, interference suppressed with varistors Load capacity: 100 V peak , $0.5 \text{ A switching current}$ (Panel Mount) 25 V peak , $0.5 \text{ A switching current}$ (Wall Mount) |
| solenoid-driven metering pumps | for pump control: | Contact service life: $> 50 \times 10^6$ switching operations at contact load 10 V , 10 mA Max. frequency: 8.33 Hz (500 strokes/min) Closing time: 100 ms |
| | Power relay output for alarm signaling: | Type of contact: Changeover contact, interference suppressed with varistors Load capacity: 250 VAC , 3 A , 700 VA Contact service life: $> 50 \times 10^6$ switching operations (Panel Mount) $> 20 \times 10^6$ switching operations (Wall Mount) |

ProMinent® D1Cb and D1Cc Analyzers

Specifications (cont.)

| | | |
|------------------------------------|-----------------------|---|
| <i>Power relay output</i> | Type of contact: | n/o contact, interference suppressed with varistors |
| <i>for control variable output</i> | Load capacity: | 250 VAC, 3 A, 700 VA |
| <i>or limit value signaling:</i> | Contact service life: | >20 x 10 ⁶ switching operations |

Electrotechnical Safety/Radio Interference Protection:

| | |
|-------------|---|
| | EC low voltage directive (73/23/EEC) subsequently 93/44/EEC |
| | EC EMC directive (89/336/EEC) subsequently 92/31/EEC |
| | Supply voltage in accordance with DIN IEC 38 |
| | Electrical safety in accordance with EN 61010-1 |
| | Electromagnetic emitted interference in accordance with EN 55011 Gr. 1/CI B |
| | Noise immunity in accordance with IEC 801-2, -3, -4 or DIN VDE 0843, Part 2, Part 3, Part 4 or EN 50082-2 |
| EN 60335-1: | Safety of electrical devices for domestic use |
| EN 50081-1: | EMC, emitted interference, residential |
| EN 50082-2: | EMC, noise immunity, industrial |
| EN 60555-2: | EMC, reactions in power supply networks, harmonics |
| EN 60555-3: | EMC, reactions in power supply networks, voltage fluctuations |

product
overviewsolenoid-driven
metering pumpsmotor-driven
metering pumpspump spare parts &
accessoriesDULCOMETER
instrumentationDULCOTEST
sensorspolymer blending &
dry feed solutions

ProMinent® D1Cb and D1Cc Analyzers

Identcode Ordering System D1C (Version b & c)

| | | | | | | | | | | | | | | | | | | | | |
|----------------------------------|---|--|----|---|----|---|---|---|---|---|---|-------------------------------|---|---|---|---|---|---|---|----|
| D1C Series | | | | | | | | | | | | | | | | | | | | |
| | B | Wall mount version | | | | | | | | | | | | | | | | | | |
| | C | Panel mount version | | | | | | | | | | | | | | | | | | |
| | Type of Mounting: | | | | | | | | | | | | | | | | | | | |
| | W | Wall mounting (IP 65, D1Cb only) | | | | | | | | | | | | | | | | | | |
| | D | Panel mounting (IP 54, D1Cc only) | | | | | | | | | | | | | | | | | | |
| | Execution: | | | | | | | | | | | | | | | | | | | |
| | 00 | w/h LCD + keypad, w/h PM - Logo | | | | | | | | | | | | | | | | | | |
| | Operating Voltage: | | | | | | | | | | | | | | | | | | | |
| | 6 | 90 - 253 VAC 50/60 Hz | | | | | | | | | | | | | | | | | | |
| | Approvals: | | | | | | | | | | | | | | | | | | | |
| | 01 | CE approval | | | | | | | | | | | | | | | | | | |
| | Hardware add-on I: | | | | | | | | | | | | | | | | | | | |
| | 0 | None | | | | | | | | | | | | | | | | | | |
| | Hardware add-on II: | | | | | | | | | | | | | | | | | | | |
| | 0 | None | | | | | | | | | | | | | | | | | | |
| | 1 | RC protection for power relays (only D1Cb) | | | | | | | | | | | | | | | | | | |
| | External connection: | | | | | | | | | | | | | | | | | | | |
| | 0 | None | | | | | | | | | | | | | | | | | | |
| | Preset software functions: | | | | | | | | | | | | | | | | | | | |
| | V | Preset software functions | | | | | | | | | | | | | | | | | | |
| Measured Variables: | | | | | | | | | | | | | | | | | | | | |
| 0 | None | | | | | | | | | | I | Chlorite | | | | | | | | |
| A | Peracetic acid | | | | | | | | | | P | pH | | | | | | | | |
| B | Bromine | | | | | | | | | | R | ORP (Redox) | | | | | | | | |
| C | Chlorine | | | | | | | | | | S | 0/4-20 mA norm signal | | | | | | | | |
| D | Chlorine dioxide | | | | | | | | | | X | Dissolved oxygen | | | | | | | | |
| F | Fluoride | | | | | | | | | | Z | Ozone | | | | | | | | |
| H | Hydrogen peroxide | | | | | | | | | | T | Temperature via mA transducer | | | | | | | | |
| L | Conductivity via mA transducer | | | | | | | | | | *Must include signal converter (pn. 809128) | | | | | | | | | |
| Connection of measured variable: | | | | | | | | | | | | | | | | | | | | |
| 1 | Standard signal 0/4-20 mA, all measured variables | | | | | | | | | | | | | | | | | | | |
| 2 | SN6 plug (mounting type "W" D1Cb only) | | | | | | | | | | | | | | | | | | | |
| 5 | mV input for pH/redox via guard terminal | | | | | | | | | | | | | | | | | | | |
| Correction variable: | | | | | | | | | | | | | | | | | | | | |
| 0 | None | | | | | | | | | | | | | | | | | | | |
| 2 | Temperature Pt 100 / Pt 1000 (pH/conductivity) | | | | | | | | | | | | | | | | | | | |
| 4 | Manual temperature input (pH/conductivity) | | | | | | | | | | | | | | | | | | | |
| Control inputs: | | | | | | | | | | | | | | | | | | | | |
| 0 | None | | | | | | | | | | | | | | | | | | | |
| 1 | Pause | | | | | | | | | | | | | | | | | | | |
| Signal Output | | | | | | | | | | | | | | | | | | | | |
| 0 | None (Standard) | | | | | | | | | | | | | | | | | | | |
| 1 | 4-20 analog output | | | | | | | | | | | | | | | | | | | |
| Relay Outputs: | | | | | | | | | | | | | | | | | | | | |
| G | Alarm and 2 limit relays or 2 timer relays | | | | | | | | | | | | | | | | | | | |
| M | Alarm and 2 limit relays or 2 relays | | | | | | | | | | | | | | | | | | | |
| Pump pacing: | | | | | | | | | | | | | | | | | | | | |
| 0 | No pumps | | | | | | | | | | | | | | | | | | | |
| 2 | Two pumps | | | | | | | | | | | | | | | | | | | |
| Control Action: | | | | | | | | | | | | | | | | | | | | |
| 0 | None | | | | | | | | | | | | | | | | | | | |
| 1 | Proportional control | | | | | | | | | | | | | | | | | | | |
| 2 | PID control | | | | | | | | | | | | | | | | | | | |
| Language: | | | | | | | | | | | | | | | | | | | | |
| 00 | Language neutral | | | | | | | | | | | | | | | | | | | |
| D1C | B | W | 00 | 6 | 01 | 0 | 0 | 0 | 0 | V | 0 | 1 | 0 | 0 | 0 | 0 | G | 0 | 0 | 00 |

ProMinent® D1Cb and D1Cc Analyzers

Fluoride Monitoring System

The D1C fluoride monitoring system incorporates the first buffer or reagent-free, ion specific sensor with a DULCOMETER D1C fluoride monitor. The monitor features upper and lower limit relays with alarm, and analog output for recording.

Note: The fluoride D1C is for monitoring only.

Measuring Principle & Application

The D1C fluoride monitoring system is based on the principles of potentiometric measuring using a reagent-free, ion specific sensor & reference electrode. The fluoride sensor features a continuous electrode activation function, ensuring long-term stability of the measurement without the need for frequent recalibration or conditioning chemicals. The fluoride sensor automatically compensates temperature, but a temperature sensor is also used to compensate for fluctuation during application.


The fluoride sensor is recommended for use in water treatment only (patent pending). We recommend installation at atmospheric pressure.

Measuring Ranges & Operating Conditions of Fluoride Sensor

| | |
|--|--|
| Measurement Range: | 0.05 to 10 ppm fluoride |
| pH Operating Range: | 5.5 to 8.5 |
| Temperature Range: | 34 to 95°F (1 to 35°C) |
| Max. Operating Pressure: | 101.5 psi (7 bar) Note: the maximum admissible operating pressure for the monitoring system is 14.5 psi (1 bar) determined by the in-line sensor housing. |
| Sensor Response Rate T_{90}: | approx. 30 seconds |
| Reproducible Measuring Accuracy: | 0.1 ppm |
| Measurement Water Flow Rate: | 16 gph (60 L/h) |

Fluoride Monitoring System

Part No.
7744836

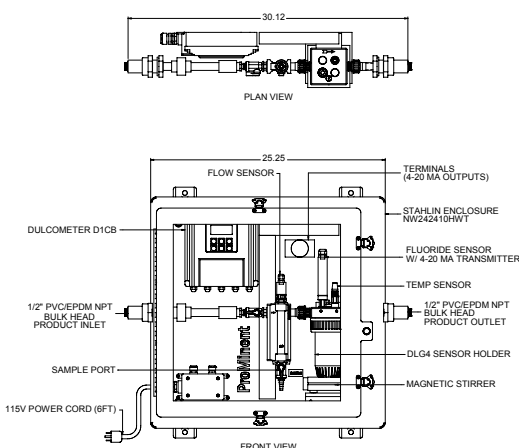

- D1C Fluoride Monitor
- Fluoride sensor: FLE 010 SE with PG 13.5 male threaded connector & SN6 plug
- Reference electrode REFP-SE with PG 13.5 male connector & SN6 plug
- Temperature sensor: PT 100 SE with PG 13.5 connector & SN6 plug
- 4-20 mA Measurement transducer: FV1 for connection to fluoride monitor & reference electrode
- DLG IV In-line sensor housing: with PG 13.5 threaded connector
- Sample outlet
- Magnetic stirrer and magnet
- PVC piping with ball stop/adjusting valve, rotameter with limit contact, sampling tap
- Sample inlet
- 115V Power cord, connectors from monitor to sensors
- PP Backpanel

Options

| | |
|------------------|---------|
| Stand Base | 7744837 |
| NEMA 4X enclosed | 7744711 |
| Heater | 7744722 |
| Sun shield | 7744723 |

ProMinent® D1Cb and D1Cc Analyzers

Fluoride Monitoring System Accessories

Replacement Sensors

| | |
|--|---------|
| FLEP 010 Fluoride Sensor with PG 13.5 male threaded connector and SN6 plug | 1028279 |
| REFP-SE Reference Electrode with PG 13.5 male connector and SN6 plug | 1018458 |
| PT 1000 SE Temperature Sensor with PG 13.5 male connector and SN6 plug | 1002856 |
| FPV1 4-20 mA Measurement Transducer for connection to fluoride monitor and reference electrode | 1028280 |

Fluoride Photometer

The D2TA or D2TB Photometer (see page 229) can be used to calibrate the fluoride monitor.

| | | |
|---------------------------|-------------|---------------------------------------|
| Measurement Range: | DT2A | 0.05 to 2 mg/L fluoride |
| | DT2B | 0.05 to 2 mg/L fluoride |
| | | 0.05 to 6 mg/L free or total chlorine |
| | | 0.01 to 11 mg/L chlorine dioxide |

| | |
|--------------------------|---------|
| D2TA kit with carry case | 1010383 |
| D2TB kit with carry case | 1010394 |

ProMinent® D1Cb and D1Cc Analyzers

Overview: Hydrogen Peroxide and Peracetic Acid

Measuring principle

The Perox measuring systems are based on amperometric/potentiostatic measuring principles incorporating several special features compared to conventional measuring technologies. The platinum [hydrogen peroxide (H_2O_2) measurement] or gold (peracetic acid measurement) working electrode with a small surface area is covered by a microporous membrane cap to achieve a degree of selectivity and independence from flow influences. The entire stainless steel shaft of the Perox sensor serves as the counter-electrode. This represents the complete sensor section for H_2O_2 measurement; a reference pH electrode is also required for peracetic acid measurement.

A special, continuous electrode activation facility which represents the actual know-how, ensures long-term stability of the measurement without the need for frequent recalibration.

Since all amperometric measure-

ment methods are relatively dependent of temperature, we recommend additional temperature compensation with the Pt 100 sensor if temperature fluctuations occur during applications. With the Pt 100, H_2O_2 measurement is a 2-electrode system while peracetic acid measurement is based on a 3-electrode system.

Applications

The environmentally-friendly substance hydrogen peroxide is used to an increasing extent in process control applications as an oxidizing or reduction agent. Examples of applications where continuous Perox H_2O_2 measurement control is used either alone or in advanced oxidation systems (with ozone, UV or Fenton's reagent) are:

- Odor control scrubbers
- Ground water purification
- Drinking water oxidation
- Utility water/cooling water disinfection
- Dechlorination, e.g. in chemical

processes

- Landfill leachate treatment
- Biotechnology
- Vat dying/textile industry
- Swimming pool water disinfection

Peracetic acid as a disinfectant is used in the following industries:

- Food and beverage
- Cosmetics
- Pharmaceuticals
- Medicine

Continuous measurement and control is necessary wherever more demanding requirements are made with regard to disinfection and quality assurance.

Increasing the peracetic acid concentration in CIP processes as well as concentration control in bottle cleaning machines are typical applications of Perox peracetic acid measurement.


Operating conditions

| Measuring ranges and applications | H_2O_2 | Peracetic acid |
|---|---|-----------------------|
| Measuring range (selectable) mg/l | 1 - 20 / 10 - 200 / 100 - 2000 | 10 - 200 / 100 - 2000 |
| pH range | pH 2.5 - 10 | pH 1 - 8 |
| Temperature range | 32 - 104°F (0 - 40°C) | 41 - 95°F (5 - 35°C) |
| Permissible changes in temperature | less than 0.9°F (0.5°C) per minute | |
| Sensor response rate T_{90} approx. | 20 seconds | 2 minutes |
| Reproducible measuring accuracy | better than 2% referred to end value of measuring range | |
| Min. conductivity of measurement solution at: | | |
| measuring range 20 mg/L | 50 $\mu S/cm$ | - |
| measuring range 200 mg/L | 200 $\mu S/cm$ | 500 $\mu S/cm$ |
| up to 1000 mg/L | 500 $\mu S/cm$ | 2000 $\mu S/cm$ |
| up to 2000 mg/L | 1000 $\mu S/cm$ | 4000 $\mu S/cm$ |
| Measurement water flow rate | recommended 16 gph (60 L/h) | |
| Max. operating pressure | 29 psig (2 bar) | |

Depending on the application, other parameters or water constituents may be of significance. For instance, higher concentrations of surface-active substances, such as fats or tensides, or suspended solids can have a detrimental effect on the measurement.

ProMinent® D1Cb and D1Cc Analyzers

Hydrogen Peroxide Analyzers

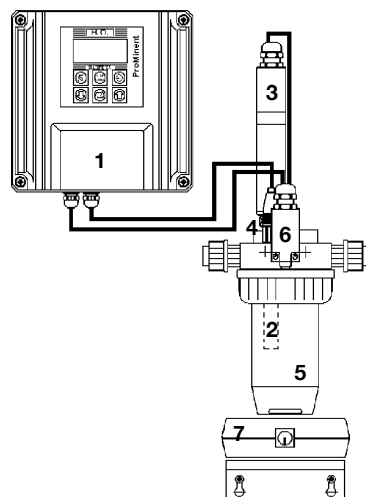

Recommended Hydrogen Peroxide System (descriptions follow)

| | Part No. |
|--|----------|
| 1 D1C H ₂ O ₂ Controller (1) | |
| 1 Hydrogen Peroxide Sensor: H 2.10 P, complete with membrane cap (2) | 792976 |
| 1 Perox signal converter: Perox-micro-H 1.20-mA (3) | 741129 |
| 1 Connection between Perox signal converter and limit sensor Three-wire cable, priced per foot (specify length) | 791948 |
| 1 Temperature Sensor: Pt 100 SE (4) | 305063 |
| 1 Connection between the temperature sensor and the controller: (Based on distance between the controller and temperature sensor) | |
| Up to 30 ft. SN6 open end cable 6 ft. (2 m) long | 305030 |
| 15 ft. (5 m) long | 305039 |
| 30 ft. (10 m) long | 305040 |
| Over 30 ft. Signal converter 4-20 mA Pt 100 V1 | 809128 |
| Two-wire cable - priced per foot (specify length) | 7740215 |
| 1 DLG-PER In-line sensor housing (5) (includes limit sensor with 2 n/o contacts) (6) | 1000165 |
| 1 Connection between the limit switch on the DLG-PER and the controller: Two-wire cable - priced per foot (specify length) | 7740215 |
| 1 Magnetic stirrer 115 VAC (7) | 7790915 |
| 1 Stirrer Magnet | 7790916 |
| 1 Compact stand (PE, UV protected, black) | 7740000 |
| 1 Power Cord, 6 ft. | 741203 |

Accessories:

| | |
|--|--------|
| Replacement membrane cap: M 2.0 P for H ₂ O ₂ sensor | 792978 |
| Polishing paste for sensor, 3 oz. (90 g) tube | 559810 |

Note: We can also provide measuring and control instruments mounted and wired, e.g. on PVC board or in a control cabinet. See PCM Systems in Feed & Control Packages section.

Sensors: Hydrogen Peroxide Measurement

The H₂O₂ sensor shaft is made of stainless steel (counter and reference electrode) with a platinum working electrode. Installation length 4.7" (120 mm), 0.5" (12 mm) Ø, PG 13.5 internal thread and SN6 plug connection.

| | |
|--------------------------------------|--------|
| H 2.10 P, complete with membrane cap | 792976 |
|--------------------------------------|--------|

Temperature sensor Pt 100 for temperature compensation of H₂O₂ measurement; necessary when temperature fluctuations can occur in the measurement medium.

| | |
|-----------|--------|
| Pt 100 SE | 305063 |
|-----------|--------|

A coaxial measuring line with an SN6 connector is required for direct connection of a temperature sensor:

| | |
|---------------------------------|--------|
| SN6 open end 6 ft. (2 m) long | 305030 |
| SN6 open end 15 ft. (5 m) long | 305039 |
| SN6 open end 30 ft. (10 m) long | 305040 |

When distances between the measuring unit and sensor exceed 30 ft. (10 m), it is recommended to use a temperature signal converter which transmits the temperature signal via a 2-wire connection at 4-20 mA. Temperature compensation input should be taken into consideration when selecting the D1C-Perox controller from the identity code.

| | |
|------------------------------------|--------|
| Signal converter 4-20 mA Pt 100 V1 | 809128 |
|------------------------------------|--------|

| | |
|--|---------|
| Two-wire cable for connection between point-of-use signal converter 4-20 mA and controller - priced per foot (specify length). | 7740215 |
|--|---------|

ProMinent® D1Cb and D1Cc Analyzers

Hydrogen Peroxide Analyzers

Perox Signal Converter

The signal converter controls and activates the hydrogen peroxide sensor and evaluates the sensor signal. It is screw-mounted directly on the head of the sensor.

The signal converter has a length of approx. 8.1" (205 mm) and a 1.25" (32 mm) Ø.

Signal converter for H₂O₂ measurement

A changeover switch for the three measuring ranges 1 - 20, 10 - 200 and 100 - 2000 mg/L H₂O₂ is located on the inside.

Part No.

Perox-micro-H 1.20-mA

741129

In-line Sensor Housing

The DLG-PER in-line sensor housing must be used for hydrogen peroxide measurement where all (max. 3) individual sensors are installed in a measuring cup. A limit sensor must also be used which switches off the power supply for the signal converter when the measuring cup is removed. The DLG-PER in-line sensor housing features a body made of rigid PVC with a transparent polyamide cup and measurement water connection with 1/2" MNPT fittings.

DLG-PER In-line sensor housing
(includes limit sensor with 2 n/o contacts)

1000165

Two-wire cable for connection between the limit switch on the DLG-PER
and the controller - priced per foot (specify length)

7740215

For calibration of the DLG-PER in-line sensor housing, we recommend a
magnetic stirrer to facilitate flow independent calibration.

Magnetic stirrer 115 VAC

7790915

Stirrer magnet

7790916

Mounting bracket for magnetic stirrer PVC
(includes screws with wall anchor)

1000166

Accessories/Spare Parts

Replacement membrane cap:

M 2.0 P for H₂O₂


792978

Polishing paste for Perox sensor, 3 oz. (90 g) tube

559810

ProMinent® D1Cb and D1Cc Analyzers

Peracetic Acid Analyzers

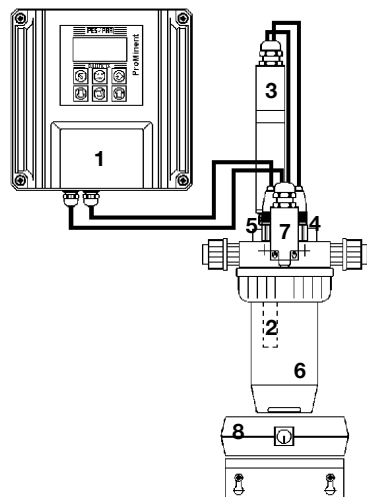Recommended Peracetic Acid System
(descriptions follow)

| | Part No. |
|--|----------|
| 1 D1C PAA Controller (1) | |
| 1 Peracetic Acid Sensor: P2.10 B, complete with membrane cap (2) | 809150 |
| 1 Perox signal converter: Perox-micro-P 1.30-mA (3) | 741128 |
| 1 Connection between Perox signal converter and limit sensor | |
| Three-wire cable, priced per foot (specify length) | 791948 |
| 1 pH Sensor: REFP - SE (4) | 1000505 |
| 1 Temperature Sensor: Pt 100 SE (5) | 305063 |
| 1 Connection between the temperature sensor and the controller: (Based on distance between the controller and temperature sensor) | |
| Up to 30 ft. SN6 open end cable 6 ft. (2 m) long | 305030 |
| 15 ft. (5 m) long | 305039 |
| 30 ft. (10 m) long | 305040 |
| Over 30 ft. Signal converter 4-20 mA Pt 100 V1 | 809128 |
| Two-wire cable - priced per foot (specify length) | 7740215 |
| 1 DLG-PER In-line sensor housing (6) | 1000165 |
| (includes limit sensor with 2 n/o contacts) (7) | |
| 1 Connection between the limit switch on the DLG-PER and the controller: | |
| Two-wire cable - priced per foot (specify length) | 7740215 |
| 1 Magnetic stirrer 115 VAC (8) | 7790915 |
| 1 Stirrer Magnet | 7790916 |
| 1 Compact stand (PE, UV protected, black) | 7740000 |
| 1 Power Cord, 6 ft. | 741203 |

Accessories:

| | |
|---|--------|
| Replacement membrane cap: M 2.0 B for peracetic acid sensor | 809154 |
| Polishing paste for sensor, 3 oz. (90 g) tube | 559810 |

Note: We can also provide measuring and control instruments mounted and wired, e.g. on PVC board or in a control cabinet. See PCM Systems in Feed & Control Packages section.

Sensors: Peracetic Acid Measurement

The peracetic acid sensor shaft is made of stainless steel (counter electrode) with a gold working electrode. Installation length 4.7" (120 mm), 0.5" (12 mm) Ø.

| | |
|--------------------------------------|--------|
| P 2.10 B, complete with membrane cap | 809150 |
|--------------------------------------|--------|

A pH sensor is also required as a reference electrode for peracetic acid measurement

| | |
|-----------|---------|
| REFP - SE | 1000505 |
|-----------|---------|

Temperature sensor Pt 100 for temperature compensation of peracetic acid measurement; necessary when temperature fluctuations can occur in the measurement medium.

| | |
|-----------|--------|
| Pt 100 SE | 305063 |
|-----------|--------|

A coaxial measuring line with an SN6 connector is required for direct connection of a temperature sensor:

| | | |
|--------------|--------------------|--------|
| SN6 open end | 6 ft. (2 m) long | 305030 |
| SN6 open end | 15 ft. (5 m) long | 305039 |
| SN6 open end | 30 ft. (10 m) long | 305040 |

When distances between the measuring unit and sensor exceed 30 ft. (10 m), it is recommended to use a temperature signal converter which transmits the temperature signal via a 2-wire connection at 4-20 mA. Temperature compensation input should be taken into consideration when selecting the D1C-Perox controller from the identity code.

| | |
|------------------------------------|--------|
| Signal converter 4-20 mA Pt 100 V1 | 809128 |
|------------------------------------|--------|

Two-wire cable for connection between point-of-use signal converter 4-20 mA and controller - priced per foot (specify length).

| |
|---------|
| 7740215 |
|---------|

ProMinent® D1Cb and D1Cc Analyzers

Peracetic Acid Analyzers

Perox Signal Converter

The signal converter controls and activates the peracetic acid sensor and evaluates the sensor signal. It is screw-mounted directly on the head of the sensor.

The signal converter has a length of approx. 8.1" (205 mm) and a 1.25" (32 mm) Ø.

Signal converter for peracetic acid measurement

A changeover switch for the two measuring ranges 10 - 200 and 100 - 2000 mg/L peracetic acid is located on the inside; the standard scope of delivery includes a measuring line with SN6 plug connector to facilitate connection to the reference electrode.

| | Part No. |
|-----------------------|----------|
| Perox-micro-P 1.30-mA | 741128 |

In-line Sensor Housing

The DLG-PER in-line sensor housing must be used for peracetic acid measurement where all (max. 3) individual sensors are installed in a measuring cup. A limit sensor must also be used which switches off the power supply for the signal converter when the measuring cup is removed. The DLG-PER in-line sensor housing features a body made of rigid PVC with a transparent polyamide cup and measurement water connection with 1/2" MNPT fittings.

| | |
|---|---------|
| DLG-PER In-line sensor housing (includes limit sensor with 2 n/o contacts) | 1000165 |
| Two-wire cable for connection between the limit switch on the DLG-PER and the controller - priced per foot (specify length) | 7740215 |
| For calibration of the DLG-PER in-line sensor housing, we recommend a magnetic stirrer to facilitate flow independent calibration. | |
| Magnetic stirrer 115 VAC | 7790915 |
| Stirrer magnet | 7790916 |
| Mounting bracket for magnetic stirrer PVC (includes screws with wall anchor) | 1000166 |

Accessories/Spare Parts

| | |
|---|--------|
| Replacement membrane cap: M 2.0 B for peracetic acid | 809154 |
| Polishing paste for Perox sensor, 3 oz. (90 g) tube | 559810 |

ProMinent® diaLog DACb

DACb Multi-parameter Controller: Overview



Water parameter analysis made easy – with the DULCOMETER diaLog DACb. With its specially designed functionalities, processing or interference variables and switchover of control parameters, it closes the control circuit between DULCOTEST sensors and ProMinent® metering pumps.

The two measuring and control channels of the DULCOMETER diaLog DACb can be individually configured to meet customer requirements. Everything that you need for the reliable treatment of industrial process water, potable water, and swimming pool water.

Your Benefits

- Simple operation thanks to a clearly arranged display
- More for your money: two measuring and control channels
- Versatile use: all common measured variables can be set per Channel and reconfigured as needed
- Control from everywhere: LAN-capable and convenient remote access via integrated web server
- Maximum flexibility: individually adjustable to different operating statuses, example: Day-Night mode
- Excellent process safety and reliability: precise metering by time-based monitoring of control variables
- Minimal time and effort: effortless duplication of device settings
- Precise monitoring and documentation: Event, calibration and measured data logger with easy-to-access SD memory card
- Optimum communication: Integration into customer networks through different fieldbus systems (PROFIBUS® DP and Modbus RTU, PROFINET)

Technical Details

- Measured variables: pH, ORP, chlorine, chlorine dioxide, chlorite, bromine, conductivity, peracetic acid, hydrogen peroxide, ozone, dissolved oxygen and fluoride
- Method of installation, degree of protection: Combination housing (wall mounting, control panel mounting, pillar assembly) IP 67 and IP 66
- Control: two measuring and control channels, each with independent monodirectional PID controller (optional: two bidirectional PID controllers)
- Temperature compensation for pH and for chlorine dioxide process sensor CDP, pH compensation for chlorine
- Digital inputs for the processing of control signals, of process water limit contacts, remote stop control and to monitor the liquid levels in chemical storage tanks
- Control outputs for electronically controlled metering pumps and solenoid valves
- Interference variable processing: simple control of water parameters in flowing water by processing the flow in the control algorithm
- Adaptation of the controller set point to changed process conditions is possible via remote control by means of the mA signal of a PLC Programmable Logic Controller or with higher requirements via the fieldbus option

- Measuring range mV connection type:
 - pH: 0.00 - 14.00
 - ORP voltage: (-1500) - (+1500) mV
 - Connection type mA (amperometric measured variables, measuring ranges corresponding to the sensors):
 - Chlorine
 - Chlorine dioxide
 - Chlorite
 - Bromine
 - Ozone
 - Hydrogen peroxide (PER sensor)
 - Hydrogen peroxide (PEROX sensor with PEROX transducer V2 Order No. 1047979)
 - Peracetic acid
 - Dissolved oxygen
 - Connection type mA (potentiometer measured variables, measuring ranges corresponding to the transmitter):
 - pH
 - ORP voltage
 - Fluoride
 - Conductivity (measuring ranges corresponding to the transmitters):
 - via Transmitter 0/4 - 20 mA
 - Temperature: via Pt 100/Pt 1000, measuring range 32°F - 302°F
- Resolution
 - pH: 0.01
 - ORP voltage: 1 mV
 - Temperature: 32.18°F
 - Amperometric analysis (chlorine etc.): 0.001/0.01 ppm, 0.01 vol.%, 0.1 vol.%
- Accuracy
 - 0.3% based on the full-scale reading
- Measurement input
 - pH/ORP (input resistance > 0.5 x 10¹² Ω)
- Temperature compensation
 - Pt 100/Pt 1000 for pH, chlorine dioxide (CDP) sensor and fluoride
- Correction range 32°F - 302°F
- pH compensation range for chlorine Sensor CLE 3 and CLE 3.1: 6.5 - 8.5, sensor CBR: 6.5 - 9.5
- Disturbance signals
 - Flow via 0/4 - 20 mA or contact water meter 1 - 500 Hz, the interference variable acts on both channels
- Control characteristic
 - P/PID control
- Control
 - 2 x bidirectional control
- Analogue outputs
 - 2 (3) x 0/4 - 20 mA electrically isolated, max. load 450 Ω, range and assignment (measured, correction, control variable) can be set
- Control outputs
 - 2 x 2 pulse frequency outputs for metering pump control 2 relays (limit value, 3-point step or pulse length control)
- Alarm relay
 - 250 V ~3 A, 700 VA contact type changeover contact
- Digital control inputs
 - 2 (5) as a remote-control input for the functions pause control / sample water fault, parameter set switch-over, level monitoring of chemical tanks
- Electrical connection
 - 90 - 253 V, 50/60 Hz, 25 VA, 24 V DC
- Field bus connection
 - PROFIBUS®-DP, Modbus RTU, PROFINET
- Ambient temperature
 - 32°F - 122°F (for use indoors or with a protective enclosure)
- Enclosure rating
 - Wall-mounted: IP 66 and IP 67 (NEMA 4X) Installation in the control cabinet: IP 54 for control cabinet door
- Tests and approvals
 - CE, MET (corresponding to UL according to IEC 61010)
- Housing material
 - PC with flame proofing equipment
- Dimensions
 - 9.84 x 8.66 x 4.80 mm (WxHxD)
- Weight
 - 2.86 lb

Standard equipment**Basic measuring variable**

- AA: 2 measuring channels with freely selectable measured variables for mA, including interference variable and pH compensation for chlorine
- VA: 2 measuring channels with freely selectable measured variables for mV (pH and ORP) and mA, including interference variable and pH compensation for chlorine
- VV: 2 measuring channels for pH and ORP
- L3: 2 measuring channels for the measured variable conductive conductivity
- PID controller with pulse frequency-based metering pump control for 2 metering pumps
- 2 analog outputs for measured value, correction value or control variable (dependent on the optional equipment)
- 4 digital inputs for sample water fault detection, pause and parameter switch-over
- 2 output relays selectable as limit value, cycle timer, real-time timer or intermittent programmable control output (depending on the optional equipment)
- Measured variables and language selection during commissioning
- Temperature compensation of the pH, chlorine dioxide (CDP) and fluoride measurement via Pt 100/Pt 1000
- Saving and transfer of device parameters by means of the SD card
- Calibration and event data logger (without SD card, data is saved in the controller)
- Interference variable processing (flow) via frequency (contact water meter)
- Subsequent upgrade of the software function by means of an activation key or firmware update

Optional equipment for 3rd pH measuring channel**Package 2**

- 3rd mA output
- Two additional metering pumps control
- External remote set-point via an analog signal for Channel 1

Package 3

- Third complete measuring and control channel with PID controller
- 3rd analog output for measured value, correction value or control variable (depending on the optional equipment)
- 3 additional digital inputs: level monitoring, pause and sample water alarm for Channel 2
- Temperature compensation of the pH, chlorine dioxide (CDP) and fluoride measurement

Package 4

- Combination of packages 2 and 3 (only one Channel for amperometric sensors is available with the interference variable mA)
- **Communication options:**
 - Measurement data logger with SD card
 - Visualization of the measured data using a web server via LAN NS, PC/tablet and web browser
 - PROFIBUS®-DP, Modbus RTU
- **Hardware extension:**
 - Protective RC circuit for output relay: Protects the output relay if inductive loads are to be switched (example: solenoid valves or motors), not with 24 V DC electrical connector
- **A complete measuring point comprises:**
 - Transmitter/controller DACb (see identity code)
 - Fitting: DGMa, DLG III, immersion fitting
 - pH sensor (identity code-dependent)
 - ORP sensor (identity code-dependent)
 - Chlorine, chlorine dioxide, chlorite, bromine, dissolved oxygen sensor
 - Transducer for pH or ORP dependent on the cable length (> 10 m)
 - Sensor cable

ProMinent® DACb

Identcode Ordering System DACb

| DACb | | Version: | | | | | | | | | | | | | | |
|--------------------|--------------------------------|---|---|----|---|---|---|---|---|---|---|---|----|---|----|--|
| | Type of Mounting: | | | | | | | | | | | | | | | |
| | W | Wall mounted | | | | | | | | | | | | | | |
| | Logo: | | | | | | | | | | | | | | | |
| | 00 | with ProMinent Logo | | | | | | | | | | | | | | |
| | Operation Voltage: | | | | | | | | | | | | | | | |
| | 6 | 100-230VAC, 50/60Hz | | | | | | | | | | | | | | |
| | Channel 1 & 2 | | | | | | | | | | | | | | | |
| | AA | mA/mA Measurement input | | | | | | | | | | | | | | |
| | L3 | 2x Conductivity conductivity, Temperature | | | | | | | | | | | | | | |
| | VA | mV/mA Measurement input | | | | | | | | | | | | | | |
| | WV | mV/mV Measurement input | | | | | | | | | | | | | | |
| | Channel 3: | | | | | | | | | | | | | | | |
| | 4 | M&C + 2DP + 3DI + FFWRD + pH | | | | | | | | | | | | | | |
| | Software Presets: | | | | | | | | | | | | | | | |
| | 0 | No default settings | | | | | | | | | | | | | | |
| | Channel Connections: | | | | | | | | | | | | | | | |
| | 0 | Channel 1, 2 & 3 hardwired | | | | | | | | | | | | | | |
| | 1 | 1x mV input on SN6 connection | | | | | | | | | | | | | | |
| | 2 | 2x mV input on SN6 connection | | | | | | | | | | | | | | |
| | 3 | 3x mV input on SN6 connection | | | | | | | | | | | | | | |
| | Connection of Digital Sensors: | | | | | | | | | | | | | | | |
| | 0 | Without | | | | | | | | | | | | | | |
| | Communication: | | | | | | | | | | | | | | | |
| | 0 | None | | | | | | | | | | | | | | |
| A | Mod RTU (RS485 or R232 | | | | | | | | | | | | | | | |
| B | PROFIBUS DPV1 | | | | | | | | | | | | | | | |
| E | Ethernet/LAN with Web Server | | | | | | | | | | | | | | | |
| Data Logger: | | | | | | | | | | | | | | | | |
| 1 | with Data Logger | | | | | | | | | | | | | | | |
| Hardware Upgrade: | | | | | | | | | | | | | | | | |
| 0 | None | | | | | | | | | | | | | | | |
| Approvals: | | | | | | | | | | | | | | | | |
| 01 | CE | | | | | | | | | | | | | | | |
| Certificates: | | | | | | | | | | | | | | | | |
| 0 | without | | | | | | | | | | | | | | | |
| Document Language: | | | | | | | | | | | | | | | | |
| | EN | | | | | | | | | | | | | | | |
| DACb | W | 00 | 4 | AA | 4 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 01 | 0 | EN | |

product
overview

solenoid-driven
metering pumps

motor-driven
metering pumps

pump spare parts &
accessories

DULCOMETER
instrumentation

DULCOTEST
sensors

polymer blending &
dry feed solutions

ProMinent® DACb Reagentless Analyzers

DACb Complete Package Part Numbers



Free Chlorine Package



Fluoride/ Total Chlorine Package

| Part Number | Package Type | Part Number | Package Type |
|-------------|---|-------------|-------------------------------|
| | Chlorine | | Chlorine |
| 1055407 | 2 PPM Total Chlorine | 1083297 | 5 PPM Total/Total Chlorine |
| 1055408 | 2 PPM Free Chlorine/pH | 1093232 | 5 PPM Free/Total Chlorine/pH |
| 1080700 | 2 PPM Total Chlorine/pH | 1049062 | 10 PPM Total Chlorine |
| 1083296 | 2 PPM Total/Total Chlorine | 1049063 | 10 PPM Free Chlorine/pH |
| 1093231 | 2 PPM Free/Total Chlorine/pH | 1080702 | 10 PPM Total Chlorine/ pH |
| 1079048 | 5 PPM Total Chlorine | 1083298 | 10 PPM Total/Total Chlorine |
| 1079050 | 5 PPM Free Chlorine/pH | 1093233 | 10 PPM Free/Total Chlorine/pH |
| 1080701 | 5 PPM Total Chlorine/pH | 1081716 | 20 PPM Total Chlorine/pH |
| | Fluoride | | |
| 1058259 | 10 PPM Fluoride/ 2 PPM Total Chlorine | | |
| 1093227 | 10 PPM Fluoride | | |
| | Hydrogen Peroxide (H₂O₂) | | |
| 1082570 | 2,000 PPM Hydrogen Peroxide | | |
| | Peracetic Acid (PAA) | | |
| 1093229 | 200 PPM Peracetic Acid | | |
| 1093230 | 2,000 PPM Peracetic Acid | | |

ProMinent® Compact Controller

Overview: Compact

The Measuring Transducer DULCOMETER Compact with control function for the measured variables pH and redox provides basic functions for applications in water treatment. It has a fixed configuration with the following features.



DULCOMETER
Compact

Summary of advantages:

- Measured variables pH and ORP (can be changed on the controller)
- Operation independent of the operating language (use of abbreviations, such as CAL, PARAM, CONFIG, ERROR)
- Illuminated display
- 3 LED display operating state (relay 1 / 2 active, Error)
- Sensor monitoring for pH
- P and PID control characteristics
- Selectable control direction (raise or lower measured value)
- Pulse frequency relay for control of metering pump
- Power relay can be configured as an alarm, limit value or pulse width modulated control output for metering pumps (connection function or switch on operating voltage)
- Analog output 4-20 mA can be configured as a writer output or control output
- Digital input to switch off the control or to process a sample water limit contact by remote control
- Temperature sensor input (Pt 1000) for temperature compensation of the pH and chlorine value

Applications

- Waste water treatment

Technical Data

- Swimming pool water treatment

| | |
|--------------------------------|--|
| Measurement range: | pH: 0.00 - 14 ORP: -1000 - +1000 mV |
| Resolution: | pH: 0.01 pH ORP: 1 mV |
| Correction variable: | Temperature for pH via Pt 1000 |
| Correction range: | 32 - 248 °F, (0 - 120 °C) |
| Control characteristic: | P/PID |
| Control: | 1-way controller with selectable control direction (raise/lower) |
| Signal current output: | 1 x 4-20 mA galvanically isolated max. load 400 Ω Range and assignment (measured or actuating variable) can be set |
| Control outputs: | 1 pulse frequency output for control of the metering pump 1 relay (alarm or limit value relay or pulse length control) 1 x analog output 4-20 mA |
| Electrical connection: | 90 - 253 V ~ |
| Ambient temperature: | 14 - 140 °F, (-10 - +60 °C) |
| Enclosure rating: | IP 67 |
| Dimensions: | 135 x 125 x 75 mm (H x W x D) |
| Weight: | 1.10 lbs, (0.5 kg) |

Compact controller for pH/ORP

Part no.

1050627

product
overview

solenoid-driven
metering pumps

motor-driven
metering pumps

pump spare parts &
accessories

DULCOMETER
instrumentation

DULCOTEST
sensors

polymer blending &
dry feed solutions

ProMinent® DMT Transmitters

Overview: DMT


DULCOMETER DMT type transmitters are compact 2-wire transmitters for measured variables pH, redox, chlorine, conductive conductivity, temperature. Easily combined with programmable memory controllers.

Summary of advantages:

- Reliable measurement
- High level of operating safety, e.g. probe monitoring (pH), electrical isolation
- Simple flexible installation
- Full text user guidance
- Automatic buffer recognition (pH)
- Autoranging (conductivity)
- Compact design
- Switch between pH, redox and temperature

Applications: process control, food and beverage industry, chemical and pharmaceutical industries, water treatment, waste water treatment, power plant

Technical Data

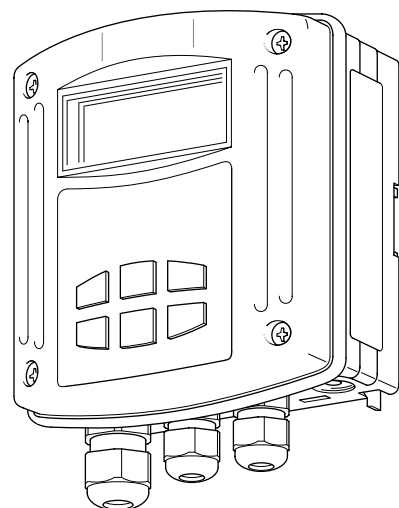

| | |
|--------------------------|---|
| Measurement range: | pH -1.00 - 15.00 -1200...+1200 mV redox voltage 0.01...50.0 ppm/l chlorine -20 - +150 °C 1 µS/cm - 200 mS/cm (autoranging) |
| Cell constant: | 0.006...12.0/cm for conductivity |
| Resolution: | pH 0.01 1 mV 0.1 % from measurement range for chlorine 0.1 °C Conductivity 1/1000 of display value (min. 0.001 µS/cm) |
| Reproducibility: | 0.5 % from measurement range |
| Measurement input: | mV terminal (pH, redox); input resistance >5 x 10 ¹¹ Ω Chlorine terminal (DMT chlorine probes) Pt 100/1000 terminal Conductivity terminal (2 or 4 wire connector) |
| Correction variable: | Temperature via Pt 100/1000 (pH, chlorine, conductivity) |
| Correction range: | chlorine: 5 - 45 °C, pH: 0 - 100 °C, Cond: 0 - 100 °C |
| Current output: | 4 - 20 mA, fault current 23 mA |
| Supply voltage: | 16 - 40 V DC |
| Feed voltage: | 2-wire transmitter, 16 - 40 V DC, nominal 24 V PROFIBUS® DP version, 16 - 30 V DC, nominal 24 V communication interface: |
| Communication interface: | PROFIBUS® DP (wall-mounted version only) |
| Ambient temperature: | -5 - +55 °C |
| Climatic conditions: | up to 95 % relative humidity (non-condensing) |
| Enclosure rating: | IP 65 (wall/pipe mounted) IP 54 (control panel installation) |
| Display: | graphical display |
| Housing: | PPE |
| Dimensions: | 125 x 135 x 75 mm (WxHxD) |
| Weight: | approx. 450 g |

A complete measuring station comprises the following:

- Measuring transducer DMTa (see Identcode)
- In-line probe housing: DGMa..., DLG III ..., immersible in-line probe housing
- Chlorine sensor
- Assembly set for chlorine sensor
- pH sensor
- Redox sensor
- Temperature sensor Pt 100 /Pt 1000
- Conductivity sensor
- Sensor cable
- PROFIBUS®-DP connection accessories

ProMinent® DMT Transmitters

Identcode Ordering System

| | | | | | | | | | | | | | |
|-----|----------|---|--|---|---|---|---|---|---|---|---|---|---|
| DMT | Version: | | | | | | | | | | | | |
| | A | | | | | | | | | | | | |
| | | Type of Mounting: | | | | | | | | | | | |
| | | W | Wall mounted (also rail mounted) | | | | | | | | | | |
| | | S | Control panel installation¹ | | | | | | | | | | |
| | | Logo: | | | | | | | | | | | |
| | | 0 | With ProMinent® logo | | | | | | | | | | |
| | | Electrical connection: | | | | | | | | | | | |
| | | 9 | Ring main 4-20 mA (two wire technology), operating voltage 16-40 V DC, nominal 24 V DC | | | | | | | | | | |
| | | 5 | PROFIBUS® DP, operating voltage 16 - 30 V DC, nominal 24 V DC (only if communication interface = PROFIBUS® DP) | | | | | | | | | | |
| | | Communication interface: | | | | | | | | | | | |
| | | 0 | None | | | | | | | | | | |
| | | 4 | PROFIBUS® DP (assembly type W only) | | | | | | | | | | |
| | | Measured variable 1: | | | | | | | | | | | |
| | | P | pH | | | | | | | | | | |
| | | R | Redox | | | | | | | | | | |
| | | T | Temperature | | | | | | | | | | |
| | | C | Chlorine | | | | | | | | | | |
| | | L | Conductivity | | | | | | | | | | |
| | | Measured variable 2 (Correcting value): | | | | | | | | | | | |
| | | 1 | Temperature Pt 1000 / Pt 100 | | | | | | | | | | |
| | | 0 | None (in the case of measured variable T) | | | | | | | | | | |
| | | Enclosure rating: | | | | | | | | | | | |
| | | 0 | Standard | | | | | | | | | | |
| | | Language: | | | | | | | | | | | |
| | | E | English | | | | | | | | | | |
| | | Presetting A, probe: | | | | | | | | | | | |
| | | 0 | Standard ProMinent® buffer solution pH 4-7-10 | | | | | | | | | | |
| | | Presetting B, probe: | | | | | | | | | | | |
| | | 0 | Autom. Temperature measurement (standard) | | | | | | | | | | |
| | | 1 | Manual temperature measurement | | | | | | | | | | |
| | | 2 | Autom./manual temperature measurement | | | | | | | | | | |
| | | 9 | No temperature measurement | | | | | | | | | | |
| | | Presetting C, output: | | | | | | | | | | | |
| | | 0 | Prop. Measured variable (standard) | | | | | | | | | | |
| | | 1 | Manual adjustable current value | | | | | | | | | | |
| | | 2 | Proportional or manual | | | | | | | | | | |
| | | 3 | Proportional or manual hold | | | | | | | | | | |
| | | 4 | 4 mA constant current | | | | | | | | | | |
| | | Presetting C: | | | | | | | | | | | |
| | | 0 | Standard | | | | | | | | | | |
| DMT | A | W | 0 | 9 | 0 | P | 1 | 0 | E | 0 | 0 | 0 | 0 |

ProMinent® Portable DT Photometer

Overview: Photometer


Photometer DT1, DT2, DT3 and DT4

- Portable compact Photometer
- Simple to operate with support text
- Reliable, simple measurement of chlorine, chlorine dioxide, fluoride, chlorite, H_2O_2 , bromine, ozone, pH and cyanuric acid
- Self-diagnostic

Applications:

swimming pool, drinking water, process water

Technical Data

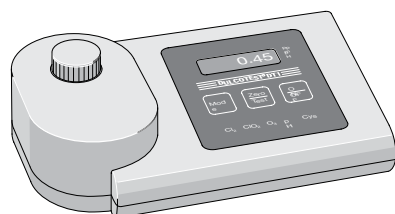

pk_5_021

| | |
|----------------------------|--|
| Measurement range of DT1: | 0.05...6.0 mg/l free chlorine (DPD 1) + total chlorine (DPD3) 0.1...13.0 mg/l bromine (DPD 1) 0.05...11 mg/l chlorine dioxide (DPD 1) 0.03...4.0 mg/l ozone (DPD 4) pH 6.5...8.4 (phenol red) 1...80 mg/l cyanuric acid |
| Measurement range of DT2B: | 0.05...2.0 mg/l fluoride 0.05...6.0 mg/l free chlorine and total chlorine 0.05...11.0 mg/l chlorine dioxide |
| Measurement ranges, DT3: | 1 - 50 / 40 - 500 mg/l hydrogen peroxide |
| Measurement ranges, DT4: | 0.03 - 2.5 mg/l chlorite, 0.05 - 11 mg/l chlorine dioxide, 0.05 - 6 mg/l chlorine |
| Measuring tolerance: | Dependent upon measured value and measuring method |
| Battery: | 9 V battery (approx. 600 x 4-minute measurement cycles) |
| Ambient temperature: | 41 - 104° F (5 - 40 °C) |
| Relative humidity: | 30 - 90 % (non-condensing) |
| Housing material: | ABS |
| Keypad: | Polycarbonate |
| Dimensions: | 7.5 x 4.3 x 2.2 in (190 x 110 x 55 mm (LxWxH)) |
| Weight: | approx. 1 lb. (0.4 kg) |

Part No.

| | |
|---|---------|
| Type DT1 photometer , complete with carrying case | 1003473 |
| Type DT3 photometer , complete with carrying case | 1023143 |
| Type DT4B photometer , complete with carrying case | 1039318 |

Photometers supplied with accessories, container vessels and reagents.

Consumable items:

Part No.

| | |
|--|---------|
| DPD 1 buffer, 15 ml | 1002857 |
| DPD 1 reagent, 15 ml | 1002858 |
| DPD 3 solution, 15 ml | 1002859 |
| Phenol red tablets R 175 (100 in each) | 305532 |
| Cyanuric acid tablets R 263 (100 in each) | 305531 |
| SPADNS reagent, 250 ml for fluoride detection | 1010381 |
| Calibration standard fluoride 1 mg/l for calibration of photometer (fluoride detection) | 1010382 |
| 3 spare cells: round cells with covers for DPD phenol red and cyanuric acid detection (DT1 and DT2B) | 1007566 |
| 3 spare cells for fluoride detection (DT2A and B) | 1010396 |
| DPD reagents set, 15 ml each: 3 x DPD 1 buffer, 1 x DPD 1 reagent, 2 x DPD 3 solution | 1007567 |
| Chlorine dioxide tablets Nr. 1 R 127 | 501317 |
| Chlorine dioxide tablets Nr. 2 R 128 | 501318 |

Spare parts

Chlorite meter:

| | |
|---|---------|
| Foamer for expulsion of chlorine dioxide (DT4) | 1022754 |
| 3 No. spare cuvettes for chlorite determination | 1007566 |

H_2O_2 meter:

| | |
|---|---------|
| Reagent for H_2O_2 (DT3), 15 ml | 1023636 |
| Spare cuvettes, 5 No., for H_2O_2 (DT3) | 1024072 |

ProMinent® Cooling Tower & Boiler Controllers

MicroFLEX Controllers



ProMinent's microFLEX controller is the perfect economical solution that provides the latest in water management technology for Cooling Towers and Boilers. The microFLEX water treatment controller offers a worry-free thermal flow switch that does not require any user adjustments. It also integrates built-in diagnostics with real-time monitoring in a compact design (5.9"W x 5.9"H x 3.5"D).

Features

- **Models:** Boiler, Cooling, Condensate diverter, Closed loop – reverse conductivity
- **Inhibitor Modes:** Bleed & Feed, Bleed then Feed, Percent Time, Meter Volume
- **Inputs:** Conductivity, Meter, System status
- **Outputs:** Two Powered Relays
- **Standard:** Single point calibration, 2 Line – 16 Character LCD, Built-In Diagnostics NEMA 4X Enclosure, CE Approved, 5 Key Universal Keypad
- **Options:** Web Browser Interface for remote view and configuration or Dry contact alarm or 4-20mA out on conductivity

Identcode Ordering System

| M02 | Series Version: | | | | |
|-----|-----------------|---|----------------------------------|---|----|
| | A | MicroFLEX 2 Controller Version A: Two relay controller with conductivity and temperature inputs, single inhibitor feed based on water meter input, bleed or % time with overfeed protection, flow switch/status input, 2 line display and 5 key universal keypad. | | | |
| | | Application: | | | |
| | | COIN | Cooling Tower | | |
| | | BBIN | Boiler | | |
| | | CLAH | Closed loop reverse conductivity | | |
| | | CMAH | Condensate monitor | | |
| | | Expansion Option: | | | |
| | | XX | None | | |
| | | CL | 4-20 mA output on conductivity | | |
| | | LB | Ethernet networking | | |
| | | AR | Dry contact alarm relay | | |
| | | Remote communications: | | | |
| | | 0 | None | | |
| | | Approvals: | | | |
| | 01 | Standard | | | |
| M02 | A | COIN | XX | 0 | 01 |

ProMinent® Cooling Tower & Boiler Controllers

MultiFLEX Controllers



ProMinent's MultiFLEX water treatment controllers exemplify the latest in water management technology. Packed with features, the MultiFLEX line of products are designed to provide the highest degree of control and flexibility. With one MultiFLEX you can control and monitor multiple towers, multiple boilers, or tower/boiler combos.

Features

- Control up to 4 Towers at once
- Control up to 8 Boilers at once
- Web Browser Accessible
- LAN Accessible
- Up to 14 Analog Inputs
- Twelve Digital Inputs
- Ten Relay Outputs
- Works with Trackster 3 Software
- 5-Key Universal Keypad
- 4 Line, 20 Character Backlit Display
- Easily Upgraded with Plug-in Modules
- Fully Programmable
- Ethernet with user definable static IP address
- NEMA 4X Enclosure
- 120 or 240VAC 50/60Hz, Switch Selectable
- CE Approved
- Supports "Percentage Time Bleed & Feed"

ProMinent® Cooling Tower & Boiler Controllers

Identcode Ordering System (M5)

| | | | | | | | | | | | | | | |
|-----|-----------------|--|--|----|----|----|---------------|---|-----|--|---|---|---|--|
| M05 | Series Version: | | | | | | | | | | | | | |
| | A | MultiFLEX 5 Controller Version A: Includes 5 universally controlled powered (120/240VAC) relays, 6 status/water meter digital inputs, 7 analog input/output channels, a 4 line 20 character back lit display, 5 key universal keypad and an Ethernet port with Browser communications. Can be programmed for cooling, boiler, process or mixture of all on one unit. | | | | | | | | | | | | |
| | | Application: | | | | | | | | | | | | |
| | | B | Boiler | | | | | | | | | | | |
| | | T | Tower, combination, or monitor | | | | | | | | | | | |
| | | X | Custom application with factory configuration | | | | | | | | | | | |
| | | I/O Expansion Slot 'A' and 'B'. (*options marked are tower only): | | | | | | | | | | | | |
| | | XX | None | | | | | | RR* | Dual ORP - Relay | | | | |
| | | B1 | Single Boiler Conductivity with Blowdown Relay | | | | | | O2* | Dual ORP - Monitor | | | | |
| | | BM | Single Boiler Conductivity - Monitor | | | | | | OP* | ORP and pH - Relay | | | | |
| | | B2 | Dual Boiler Conductivity with Blowdown Relay | | | | | | MM* | ORP and pH - Monitor | | | | |
| | | BB | Dual Boiler Conductivity - Monitor | | | | | | CR* | Single corrosion rate | | | | |
| | | CC | Boiler Condensate Conductivity/Temp - Relay | | | | | | DC* | Dual corrosion rate | | | | |
| | | CN | Boiler Condensate Conductivity/Temp - Monitor | | | | | | CI | Single 4-20 mA Input - Relay | | | | |
| | | PC | Single Boiler Condensate pH - Relay | | | | | | IM | Single 4-20 mA Input - Monitor | | | | |
| | | PN | Single Boiler Condensate pH - Monitor | | | | | | 2I | Dual 4-20 mA Input 1 relay | | | | |
| | | CO* | Cooling Tower Conductivity/Temp - Relay | | | | | | I2 | Dual 4-20 mA Input 2 relays | | | | |
| | | CM* | Cooling Tower Conductivity/Temp - Monitor | | | | | | 2M | Dual 4-20 mA Input Monitor | | | | |
| | | PH* | Single Cooling Tower pH - Relay | | | | | | II | Dual 4-20 mA Input (isolated) 1 relay | | | | |
| | | PM* | Single Cooling Tower pH - Monitor | | | | | | I3 | Dual 4-20 mA Input (isolated) 2 relays | | | | |
| | | PP* | Dual Cooling Tower pH - Relay | | | | | | I4 | Dual 4-20 mA Input (isolated) Monitor | | | | |
| | | P2* | Dual Cooling Tower pH - Monitor | | | | | | IO | Single 4-20 mA Output | | | | |
| | | PT* | Single pH/Temp (Temperature compensated pH) | | | | | | OO | Dual 4-20 mA Output | | | | |
| | | OR* | Single ORP - Relay | | | | | | RS | Rate to Stroke driver | | | | |
| | | OM* | Single ORP - Monitor | | | | | | CS | Conduct continuous sample monitor | | | | |
| | | I/O Expansion Slot 'C' and 'D': | | | | | | | | | | | | |
| | | XX | Use same selection options as expansion slot 'A' and 'B' | | | | | | | | | | | |
| | | I/O Expansion Slot 'E' and 'F': | | | | | | | | | | | | |
| | | XX | Use same selection options as expansion slot 'A' and 'B' | | | | | | | | | | | |
| | | I/O Expansion Slot 'G': | | | | | | | | | | | | |
| | | XX | Same choices as Slot A/B except only single expansion card options allowed | | | | | | | | | | | |
| | | Pre-wired power relay plug box: | | | | | | | | | | | | |
| | | 0 | None | | | 3 | Three outlets | | | | | | | |
| | | 1 | One outlet | | | 4 | Four outlets | | | | | | | |
| | | 2 | Two outlets | | | 5 | Five outlets | | | | | | | |
| | | Inhibitor powered relays (tower only): | | | | | | | | | | | | |
| | | 0 | None | | | 3 | Three | | | | | | | |
| | | 1 | One | | | 4 | Four | | | | | | | |
| | | 2 | Two | | | | | | | | | | | |
| | | Timed biocide powered relays: | | | | | | | | | | | | |
| | | 0 | None | | | 3 | Three | | | | | | | |
| | | 1 | One | | | 4 | Four | | | | | | | |
| | | 2 | Two | | | | | | | | | | | |
| | | Internal boiler treatment: | | | | | | | | | | | | |
| | | 0 | None | | | 5 | Five | | | | | | | |
| | | 1 | One | | | 6 | Six | | | | | | | |
| | | 2 | Two | | | 7 | Seven | | | | | | | |
| | | 3 | Three | | | 8 | Eight | | | | | | | |
| | | 4 | Four | | | | | | | | | | | |
| | | Remote communications: | | | | | | | | | | | | |
| | | 0 | None | | | | | | | | | | | |
| | | Feed verifications: | | | | | | | | | | | | |
| | | 0 | None | | | | | | 3 | Feed verification (3) | | | | |
| | | 1 | Feed verification (1) | | | | | | 4 | Feed verification (4) | | | | |
| | | 2 | Feed verification (2) | | | | | | | | | | | |
| | | Operating Voltage: | | | | | | | | | | | | |
| | | A | 115 VAC 50/60 Hz | | | | | | | | | | | |
| | | B | 230 VAC 50/60 Hz | | | | | | | | | | | |
| M05 | A | B | XX | XX | XX | XX | 0 | 0 | 0 | 0 | 0 | 0 | A | |

ProMinent® Cooling Tower & Boiler Controllers

Identcode Ordering System (M10)

| | | | | | | | | | | | | | | | | | |
|---|---|---|----|----|----|----|----|----|-----|--|---|---|---|---|---|---|--|
| M10 | Series Version: | | | | | | | | | | | | | | | | |
| A | MultiFLEX 10 Controller Version A: Includes 10 universally controlled powered (120/240VAC) relays, 12 status/water meter digital inputs, 14 analog input/output channels, 4 line 20 character backlit display, 5 key universal keypad and an Ethernet port with Browser communications. Can be programmed for cooling, boiler, process or a mixture of all on one unit. | | | | | | | | | | | | | | | | |
| Application: | | | | | | | | | | | | | | | | | |
| B | Boiler | | | | | | | | | | | | | | | | |
| T | Tower, combination, or monitor | | | | | | | | | | | | | | | | |
| X | Custom application with factory configuration | | | | | | | | | | | | | | | | |
| I/O Expansion Slot 'A' and 'B'. (*options marked are tower only): | | | | | | | | | | | | | | | | | |
| XX | None | | | | | | | | RR* | Dual ORP - Relay | | | | | | | |
| B1 | Single Boiler Conductivity with Blowdown Relay | | | | | | | | O2* | Dual ORP - Monitor | | | | | | | |
| BM | Single Boiler Conductivity - Monitor | | | | | | | | OP* | ORP and pH - Relay | | | | | | | |
| B2 | Dual Boiler Conductivity with Blowdown Relay | | | | | | | | MM* | ORP and pH - Monitor | | | | | | | |
| BB | Dual Boiler Conductivity - Monitor | | | | | | | | CR* | Single corrosion rate | | | | | | | |
| CC | Boiler Condensate Conductivity/Temp - Relay | | | | | | | | DC* | Dual corrosion rate | | | | | | | |
| CN | Boiler Condensate Conductivity/Temp - Monitor | | | | | | | | CI | Single 4-20 mA Input - Relay | | | | | | | |
| PC | Single Boiler Condensate pH - Relay | | | | | | | | IM | Single 4-20 mA Input - Monitor | | | | | | | |
| PN | Single Boiler Condensate pH - Monitor | | | | | | | | 2I | Dual 4-20 mA Input 1 relay | | | | | | | |
| CO* | Cooling Tower Conductivity/Temp - Relay | | | | | | | | I2 | Dual 4-20 mA Input 2 relays | | | | | | | |
| CM* | Cooling Tower Conductivity/Temp - Monitor | | | | | | | | 2M | Dual 4-20 mA Input Monitor | | | | | | | |
| PH* | Single Cooling Tower pH - Relay | | | | | | | | II | Dual 4-20 mA Input (isolated) 1 relay | | | | | | | |
| PM* | Single Cooling Tower pH - Monitor | | | | | | | | I3 | Dual 4-20 mA Input (isolated) 2 relays | | | | | | | |
| PP* | Dual Cooling Tower pH - Relay | | | | | | | | I4 | Dual 4-20 mA Input (isolated) Monitor | | | | | | | |
| P2* | Dual Cooling Tower pH - Monitor | | | | | | | | IO | Single 4-20 mA Output | | | | | | | |
| PT* | Single pH/Temp (Temperature compensated pH) | | | | | | | | OO | Dual 4-20 mA Output | | | | | | | |
| OR* | Single ORP - Relay | | | | | | | | RS | Rate to Stroke driver | | | | | | | |
| OM* | Single ORP - Monitor | | | | | | | | | | | | | | | | |
| I/O Expansion Slot 'C' and 'D': | | | | | | | | | | | | | | | | | |
| XX | Use same selection options as expansion slot 'A' and 'B' | | | | | | | | | | | | | | | | |
| I/O Expansion Slot 'E' and 'F': | | | | | | | | | | | | | | | | | |
| XX | Use same selection options as expansion slot 'A' and 'B' | | | | | | | | | | | | | | | | |
| I/O Expansion Slot 'G' and 'H': | | | | | | | | | | | | | | | | | |
| XX | Use same selection options as expansion slot 'A' and 'B' | | | | | | | | | | | | | | | | |
| I/O Expansion Slot 'I' and 'J': | | | | | | | | | | | | | | | | | |
| XX | Use same selection options as expansion slot 'A' and 'B' | | | | | | | | | | | | | | | | |
| I/O Expansion Slot 'K' and 'L': | | | | | | | | | | | | | | | | | |
| XX | Use same selection options as expansion slot 'A' and 'B' | | | | | | | | | | | | | | | | |
| I/O Expansion Slot 'M' and 'N': | | | | | | | | | | | | | | | | | |
| XX | Use same selection options as expansion slot 'A' and 'B' | | | | | | | | | | | | | | | | |
| Pre-wired power relay plug box: | | | | | | | | | | | | | | | | | |
| 0 | None | | | | | | | | 6 | Six outlets | | | | | | | |
| 1 | One outlet | | | | | | | | 7 | Seven outlets | | | | | | | |
| 2 | Two outlets | | | | | | | | 8 | Eight outlets | | | | | | | |
| 3 | Three outlets | | | | | | | | 9 | Nine outlets | | | | | | | |
| 4 | Four outlets | | | | | | | | A | Ten outlets | | | | | | | |
| 5 | Five outlets | | | | | | | | | | | | | | | | |
| Inhibitor powered relays (tower only): | | | | | | | | | | | | | | | | | |
| 0 | None | | | | | | | | 3* | Three | | | | | | | |
| 1* | One | | | | | | | | 4* | Four | | | | | | | |
| 2* | Two | | | | | | | | | | | | | | | | |
| Timed biocide powered relays: | | | | | | | | | | | | | | | | | |
| 0 | None | | | | | | | | 3 | Three | | | | | | | |
| 1 | One | | | | | | | | 4 | Four | | | | | | | |
| 2 | Two | | | | | | | | | | | | | | | | |
| Internal boiler treatment: | | | | | | | | | | | | | | | | | |
| 0 | None | | | | | | | | 5 | Five | | | | | | | |
| 1 | One | | | | | | | | 6 | Six | | | | | | | |
| 2 | Two | | | | | | | | 7 | Seven | | | | | | | |
| 3 | Three | | | | | | | | 8 | Eight | | | | | | | |
| 4 | Four | | | | | | | | | | | | | | | | |
| Remote communications: | | | | | | | | | | | | | | | | | |
| 0 | None | | | | | | | | | | | | | | | | |
| Feed verifications: | | | | | | | | | | | | | | | | | |
| 0 | None | | | | | | | | | | | | | | | | |
| 1 | Feed verification (1) | | | | | | | | | | | | | | | | |
| 2 | Feed verification (2) | | | | | | | | | | | | | | | | |
| 3 | Feed verification (3) | | | | | | | | | | | | | | | | |
| 4 | Feed verification (4) | | | | | | | | | | | | | | | | |
| Operating Voltage: | | | | | | | | | | | | | | | | | |
| A | 115 VAC 50/60 Hz | | | | | | | | | | | | | | | | |
| B | 230 VAC 50/60 Hz | | | | | | | | | | | | | | | | |
| M10 | A | B | XX | XX | XX | XX | XX | XX | XX | 0 | 0 | 0 | 0 | 0 | 0 | A | |

ProMinent® Cooling Tower & Boiler Controllers

Overview AEGIS X



AEGIS X is an open platform water treatment controller for municipal, industrial, food and beverage, cooling, and boiler treatment applications.

To optimize the water treatment, process the device continuously monitors and controls a variety of measured parameters and digital inputs. Control of various devices is accomplished through the flexible programming the open platform controller. The device can control metering pumps, valves, motors, and other components to provide full automation of your system.

With up to two satellite units, AEGIS X can accommodate complicated processes. The combination of main and satellite units ensures truly excellent flexibility.

Thanks to the large number of communication options, the water treatment process can be remotely controlled with ease. An individually adaptable web server makes simple management, tracking and data visualization possible.

| Features | Benefits |
|--|--|
| Up to two satellite units can be added for additional inputs and outputs, allowing more sensors and pumps to be connected | This provides expandability, ability to control processes with many parameters and ease of onsite installation. |
| Intuitive operation via the HMI (Human-Machine Interface) thanks to a clearly legible industrial display and robust keys for standard commands, such as calibration and monitoring | This feature eliminates the need to replace or repair costly touch screens. |
| | The adaptable web server permits simple configuration of process settings as well as monitoring and visualization of process data. This feature provides ease of programming of the controller as well as superior user experience with the ease of the web server format. |
| Extensive overview and control of the water treatment processes: All process data and alarms can be communicated to operations control system via fieldbuses such as Modbus RTU. | This feature eliminates time spent checking the process through annunciation of alarms and warnings for the process. |
| Advanced communication options: Various network protocols such as FTP or MQTT enable remote access and data management via Wi-Fi and LAN (Ethernet). | Allows for the integration of the controller into more comprehensive main control systems |
| Advanced calculations, such as cost calculation for managing chemicals. | This feature can be used to readily report on operating cost and pinpoint upset conditions or anomalies in chemical consumption |

ProMinent® Cooling Tower & Boiler Controllers

Technical Data AEGIS X

Technical Details

Comprehensive inputs and outputs

- Up to 24 flexible sensor inputs and mA outputs (8 per device), e.g., CTFS sensor, linear polarization resistor (LPR) corrosion sensor, pH, Chlorine, ORP.
- Up to 30 output relays and pulse outputs (10 per device) to control pumps and other actuators
- Up to 24 digital inputs (8 per device) to control level switches, water meters and remote switches
- Up to 12 pulse frequency outputs
- Up to 18 relays

Communication options

- In-built Modbus RTU and via gateways (BACnet, Modbus TCP, PROFINET)
- Web interface via Wi-Fi and Ethernet, FTP server, rest API, MQTT client interface. The client interface is an intuitive remote control via a Wi-Fi or network connection to your PC or smartphone, e.g., for configuration settings or setpoint settings

Measured variables and ranges

Conductivity:

With digital sensor CTFS at input A and B and via serial module D1: 0.1 - 10 mS/cm

Via conductivity module L3 depending on sensor used (LMP, LFT): 50 µS/cm - 20 mS/cm

Via mA module AA with the inductive conductivity sensor ICT: 8 to 2 mS/cm, 20 mS/cm, 200 mS/cm

Type of connection mV:

pH: 0.00 ... 14.00

ORP potential: -1500 ... +1500 mV

Type of connection mA (amperometric measured variables, measuring ranges corresponding to sensors, 2 ppm, 10 ppm):

Chlorine, Chlorine dioxide, Chlorite, Bromine, Ozone, Hydrogen peroxide, Peracetic acid

Temperature:

via Pt 100/Pt 1000, measuring range 0 ... 150 °C, 32...302 F

Inputs and outputs

Inputs

4 plug-in module slots per unit for

2-channel serial sensor input module 2-channel conductivity input module 2-channel mV input module

2-channel mV/mA input module 2-channel mA input module

Outputs

2-channel mA output module

6 output relays as changeover contacts, of which 3 are potential-free and 3 are AC/DC

4 pulse frequency outputs for controlling metering pumps

8 digital control inputs for contact water meter, flow switch and pause for locking

Resolution

pH: 0.01 pH

ORP: 1 mV

Amperometric analysis (chlorine etc.): 0.001/0.01 ppm, 0.01 vol.%

0.3% based on the full-scale reading

Accuracy

Temperature compensation

Pt 100/Pt 1000 for pH

Control characteristic

P/PI/PID control

Electrical Connection

100 – 230 V, 50/60 Hz

Ambient temperature

-5... 50 °C, 23 ... 122 F at max. 95% relative air humidity (non-condensing)

Tests and approvals

CE, MET registered, UK CA

Housing material

PC with flame proofing equipment

Dimensions

276 x 424 x 137 mm (H x W x D)

Enclosure rating

Wall-mounted: IP 67

Field bus connection

Modbus RTU, additional field buses via gateway

ProMinent® Cooling Tower & Boiler Controllers

Overview AEGIS II

The most innovative and flexible water treatment controller available

The new AEGIS II provides reliable control and offers the most flexible communication options to optimize efficiency and profitability for all your cooling, boiler, and waste water or disinfection applications.



Features:

- Built In Wireless Access Point, Bluetooth and Ethernet
- New Keypad design for easy menu navigation
- Enhanced responsive browser views for Smart Phones and Tablets
- Fluorometer connection via 4-20mA or (Future) direct Modbus
- 8 digital inputs for multiple flow meters for status indicators
- 10 Status LED's
- Integral Data Logger
- (Future) Optional Modbus/BACnet communications
- 9 Flexible control outputs include: ON/OFF setpoint or time based control & Frequency (Pulse) Proportional or volumetric control
- Conductivity, pH, ORP, Corrosion, Chlorine, Bromine, PAA, CLO2, Fluorescence and more

Technical Data AEGIS II

| | Rating - Detail | Notes |
|--|---|---|
| Analog-Digital I/O | | |
| Conductivity Serial Sensor | Tower & Integral Flowswitch sensors | Default tower sensor includes 1 GPM integral flowswitch & temperature |
| Conductivity Sensor | Boiler & Condensate sensors | Standard sensor |
| Fixed Temperature Sensor Input | Thermal compensation for both pH and Conductivity | Displayed as oF, oC or oK |
| Fixed 4-20 mA Current Loop Input | Assignable to control any relay or variable frequency control | Single point calibration if 4 mA = 0 |
| 4-20 mA Current | DC isolated, Manual & Auto modes, Interlocking, Alarm | Each optional current output uses a dual sensor card slot |
| Manual-Inventory-Inputs | Track drop counts, inventory, tank level, ppm | Alarmed delay prevents premature system ppm alarms |
| Communications User Interface | | |
| Keypad - OLED | 9 Key tactile feedback, 3 Function keys, 4 line Backlit | |
| 10/100 Mbps, TCP/IP Ethernet, wifi, (Optional LAN, Future Modbus & Modbus RTU) | HTML micro web server with user definable IP address | Static IP Browser shows controller in real time |
| Controls for ON/OFF & Variable Frequency | | |
| Sequential Volume Setpoints | Feed a fixed volume for every make-up volume | Meter only, fault tolerant feed controls |
| Blocking | Any of 9 controls may block any other control | Prevents incompatible concurrent controls |
| Interlocking | Up to 4 contact sets can be 'AND'ed or 'OR'ed | Relays & Frequency controls OFF when contact set opens |
| Biocide Event Controls | Each of 9 controls includes 28 timed events | Each control selectable for 1, 7 & 28 day cycles |
| System | | |
| Electrical | 100-240 VAC, 50/60 Hz, Single Phase | Universal power supply |
| Fusing for 2 AC powered loads | 6.3 Amps @ 250VAC | Alarm on open AC load fuse |
| Surge Suppression | 5 snubbed contacts | RC / Varistor on AC line input |
| Enclosure | Non-metallic, IP 65 / NEMA 4X | 13.46" x 8.94" x 3.07" (342 x 227 x 78 mm) (WxHxD) |

ProMinent® Cooling Tower & Boiler Controllers

AEgis II Part Numbered Packages

AEgis II - Cooling Tower (with Panel)

| Part Number | Description |
|-------------|--|
| 1079066 | Conductivity, dual biocide |
| 1079067 | Conductivity, dual biocide, pH w/acid feed |
| 1079068 | Conductivity, dual biocide, ORP w/bleach feed |
| 1079069 | Conductivity, dual biocide, pH w/acid feed, ORP w/bleach feed |
| 1079070 | Conductivity, dual biocide, pH w/acid feed, ORP w/bleach feed, CS and CU corrosion |

AEgis II - Cooling Tower (with Pyxis)

| Part Number | Description |
|-------------|--|
| 1082241 | Conductivity, dual biocide-includes Pyxis |
| 1082242 | Conductivity, dual biocide, pH w/acid feed-includes Pyxis |
| 1082243 | Conductivity, dual biocide, ORP w/bleach feed-includes Pyxis |
| 1082244 | Conductivity, single bio, pH w/acid feed, ORP w/bleach feed-includes Pyxis |
| 1081939 | Conductivity, single bio, pH w/acid feed, ORP w/bleach feed, CS and CU corrosion, includes Pyxis |

AEgis II - Cooling Tower with Little Dipper

| Part Number | Description |
|-------------|--|
| 1082245 | Conductivity, dual biocide-includes Little Dipper |
| 1082246 | Conductivity, dual biocide, pH w/acid feed-includes Little Dipper |
| 1082247 | Conductivity, dual biocide, ORP w/bleach feed-includes Little Dipper |
| 1082248 | Conductivity, single bio, pH w/acid feed, ORP w/bleach feed-includes Little Dipper |
| 1082249 | Conductivity, single bio, pH w/acid feed, ORP w/bleach feed, CS and CU corrosion, includes Little Dipper |

AEgis II - Boiler (No Panel)

| Part Number | Description |
|-------------|-------------------------------|
| 1079064 | Single Boiler - 2 |
| 1079065 | Dual Boiler / 2 chemical feed |

Note: Other configurations available, please consult factory.

ProMinent® Cooling Tower & Boiler Controllers

Overview SlimFlex 5

The most innovative and flexible water treatment controller available

Say hello to flexible programming with ProMinent's SlimFlex 5 Built-in WiFi Hotspot.

Enhanced, responsive browser views for smart phones and tablets makes programming fast and easy! Built-in Ethernet and integral data logger creates the total communications package for all of your cooling tower and boiler applications.



Features:

- Cooling Tower or Boiler
- 5 Flexible control outputs include: ON/OFF setpoint or time based control
- Built In Wireless Access Points, Ethernet and USB
- New Keypad design for easy menu navigation
- Enhanced responsive browser views for Smart Phones and Tablets
- pH and/or ORP along with conductivity
- 6 digital inputs for multiple flow meters or status indicators
- 6 Status LED's
- 5 Powered relays
- Integral Data Logger
- Conductivity, pH, ORP and Fluorometer
- Email out data and alarms

ProMinent® Cooling Tower & Boiler Controllers

Technical Data SlimFlex 5

| | Rating - Detail | Notes |
|---|---|---|
| Analog-Digital I/O | | |
| Conductivity Serial Sensor | Tower & Integral Flowswitch sensors | Default tower sensor includes 1 GPM integral flowswitch & temperature |
| Conductivity Sensor | Boiler & Condensate sensors | Standard sensor |
| 4-20 mA Current | DC isolated, Manual & Auto modes, Interlocking, Alarm | Each optional current output uses a dual sensor card slot |
| Manual-Inventory-Inputs | Track drop counts, inventory, tank level, ppm | Alarmed delay prevents premature system ppm alarms |
| Communications User Interface | | |
| Keypad - OLED | 9 Key tactile feedback, 3 Function keys, 4 line Backlit | |
| 10/100 Mbps, TCP/IP Ethernet, WiFi | HTML micro web server with user definable IP address | Static IP Browser shows controller in real time |
| Controls for ON/OFF & Variable Frequency | | |
| Sequential Volume Setpoints | Feed a fixed volume for every make-up volume | Meter only, fault tolerant feed controls |
| Blocking | Any of 5 controls may block any other control | Prevents incompatible concurrent controls |
| Interlocking | Up to 4 contact sets can be 'AND'ed or 'OR'ed | Relays control OFF when contact set opens |
| Biocide Event Controls | Each of 5 controls includes 28 timed events | Each control selectable for 1, 7 & 28 day cycles |
| System | | |
| Electrical | 100-240 VAC, 50/60 Hz, Single Phase | Universal power supply |
| Fusing for 2 AC powered loads | 6.3 Amps @ 250VAC | Alarm on open AC load fuse |
| Surge Suppression | 5 snubbed contacts | RC / Varistor on AC line input |
| Enclosure | Non-metallic, IP 65 / NEMA 4X | 13.46" x 8.94" x 3.07" (342 x 227 x 78 mm) (WxHxD) |

ProMinent® Cooling Tower & Boiler Controllers

SlimFlex 5 Part Numbered Packages

SlimFlex 5 - Cooling Tower Panel

| Part Number | Description |
|-------------|---|
| 1095560 | Conductivity |
| 1095561 | Conductivity, with dual 4-20mA Output |
| 1095598 | Conductivity, pH |
| 1095599 | Conductivity, pH, with dual 4-20mA Output |
| 1095600 | Conductivity,ORP |
| 1095601 | Conductivity,ORP, with dual 4-20mA Output |
| 1095562 | Conductivity, pH, ORP |
| 1095563 | Conductivity, pH, ORP, dual 4-20mA Output |

SlimFlex 5 - Cooling Tower Panel with Pyxis

| Part Number | Description |
|-------------|--|
| 1095603 | Conductivity - includes Pyxis |
| 1095605 | Conductivity, with dual 4-20 ma Output, includes Pyxis |
| 1095607 | Conductivity, pH, includes Pyxis |
| 1095609 | Conductivity, ORP, includes Pyxis |
| 1095611 | Conductivity, pH, ORP, includes Pyxis |

SlimFlex 5 - Cooling

| Part Number | Description |
|-------------|--|
| 1095602 | Conductivity, includes Little Dpper |
| 1095604 | Conductivity, with dual 4-20 mA Output, includes Little Dipper |
| 1095606 | Conductivity, pH, includes Little Dpper |
| 1095608 | Conductivity, ORP, includes Little Dpper |
| 1095610 | Conductivity, pH, ORP, includes Little Dpper |

SlimFlex 5 - Cooling

| Part Number | Description |
|-------------|--|
| 1095564 | Single Boiler Blowdown with chemical feed timers |
| 1095565 | Single Boiler Blowdown with chemical feed timers, dual 4-20 mA out |
| 1095566 | Dual Boiler Blowdown with chemical feed timers |
| 1095567 | Dual Boiler Blowdown with chemical feed timers, dual 4-20 mA out |

Note: Other configurations available, please consult factory.

ProMinent® Cooling Tower & Boiler Controllers

Cooling Tower and Boiler Accessories

| Analog Sensors | Controller Choice | Part No. |
|--|-------------------|----------|
| ORP Sensor Package - Chlorination with cable, Tee and probe holder | B,C, D | 7760768 |
| ORP Electrode, flat faced double junction 100 psi @175°F - cable required PN 1036595 | B,C,D | 7761399 |
| PHED Sensor Package with cable, Tee and probe holder | B,C,D | 7760729 |
| pH Electrode, flat faced double junction 100 psi @ 175°F - cable required PN 1036595 | B,C,D | 7760998 |
| Conductivity/Temperature Electrode 125 psi @125°F with Tee - Cooling applications | B,C,D | 7760200 |
| Aquatrac Conductivity/Temperature/Thermal Flow Switch CTF (Cooling) | A,B,D | 7760021 |
| Corrosion Rate Electrode, Admiralty | C,D | 7760748 |
| Corrosion Rate Electrode, Carbon Steel | C,D | 7760746 |
| Corrosion Rate Electrode, Copper | C,D | 7760747 |
| Corrosion Rate Electrode, Cupro-Nickle | C,D | 7760750 |
| Corrosion Rate Electrode, Stainless Steel | C,D | 7760749 |
| Corrosion Rate Electrode, Zinc | C,D | 7760745 |
| Aquatrac Thermal Flow Switch 100psi @125°F | A,B,C,D | 7760175 |
| Conductivity Electrode 3/4" NPT 250psi steam max (Boiler - standard sensor) | A,C,D | 7760002 |
| Conductivity/Temperature Electrode 250psi steam max 3/4" NPT 4 wire (Condensate) | A,C,D | 7760191 |
| pH Electrode, 1/2" NPT SS, 230°F max (Condensate) | B,C,D | 7760465 |
| High Pressure Flow Switch 1.5GPM, 400 psi max 3/4" NPT , Bronze | A,B,C,D | 7760203 |
| Water Meters | | |
| 3/4" Contacting head water meter, 1GPC, 3/4" FNPT | B,C,D | 7760518 |
| 1" Contacting head water meter, 10GPC, 1" FNPT | B,C,D | 7760515 |
| 1 1/2" Contacting head water meter, 100 GPC, 1" FNPT | B,C,D | 7760516 |
| 2" Contacting head watermeter 100GPC, 2"FNPT | B,C,D | 7760517 |
| 3/4in Paddlewheel Water Meter Sensor. Supplied in PVC pipe section. | B,C,D | 7760514 |
| 1in Paddlewheel Water Meter Sensor. Supplied in PVC pipe section. | B,C,D | 7760508 |
| 1.5" Paddlewheel Water Meter Sensor. Supplied in PVC pipe section. | B,C,D | 7760509 |
| 2" Paddlewheel Water Meter Sensor. Supplied in PVC pipe section. | B,C,D | 7760510 |
| 3" Paddlewheel Water Meter Sensor. Supplied in PVC pipe section. | B,C,D | 7760511 |
| 4" Paddlewheel Water Meter Sensor. Supplied in PVC pipe section. | B,C,D | 7760512 |
| Solenoids and Valves | | |
| 1/2" Solenoid valve for cooling application. 150 psi max | A B,C,D | 7760212 |
| 3/4" Solenoid valve for cooling application. 150 psi max | A,B,C,D | 7760213 |
| 1" Solenoid valve for cooling application. 150 psi max | A,B,C,D | 7760214 |
| Needle valve 1/2", rated 250 psi steam, color coded shaft, numbered handle | A,B,C,D | 7760006 |
| Orifice Union, 1/2" NPT, 250 psi steam, with four orifice plates | A,B,C,D | 7760109 |
| Motorized blowdown valve 1/2"NPT, 120VAC, 250psi steam | A,B,D | 7760217 |
| Motorized blowdown valve 3/4"NPT, 120VAC, 250psi steam | A,B,D | 7760218 |
| Motorized blowdown assembly, 1/2"NPT, 120VAC 250psi steam w/needle valve and T | A,B,D | 7760013 |
| A - microFLEX B - SlimFlex 5 C - multiFLEX D - AEGIS II | | |