


NOTES:

- 1. ALL PIPING AND FITTINGS SHALL BE 1/2" SCH. 80 PVC SOCKET WELD WITH VITON SEALS UNLESS OTHERWISE REQUIRED BY COMPONENTS.
- 2. ALL DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR REFERENCE ONLY.

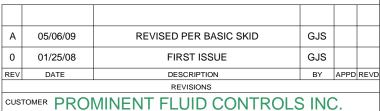

(PRE-ENGINEERED SYSTEM)

JOB No 7749010 PURCHASE ORDER No

SS1-C_FLOOR_050_PVC\VITON_PD_FM GENERAL ARRANGEMENT

THIS DRAWING IS THE PROPERTY OF PROMINENT FLUID CONTROLS INC. AND SHALL NOT BE COPIED OR TRANSFERRED WITHOUT THE WRITTEN CONSENT OF PROMINENT FLUID CONTROLS INC.


ENGINEERS SEAL

TITLE






	PITTSBURGH, PA USA		WWW.PROMINENT.US		
	PROMINENT FLUID CONTROLS LTD.		PROMINENT FLUID CONTROLS INC.		
	490 SOUTHGATE DRIVE. GUELPH, ONTARIO, CANADA N1H 6J3		RIDC PARK WEST 136 INDUSTRY DRIVE,		
			PITTSBURGH P.A., USA. 15275		
	TEL. 519 836 5692	FAX. 519 836 5226	TEL. 4	112 787 2484 F	AX. 412 787 0704
	DESIGNED GJS		APPROVED		
	DRAWN	GJS	SCA	CALE N.T.S.	
	CHECKED	DTH	DAT	E 01/25/08	
				REV	PAGE
и	10010 200			^	4 /4

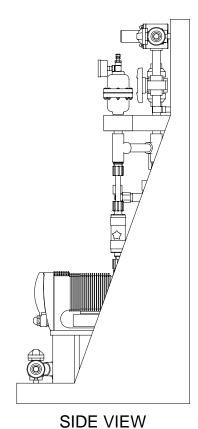

ISOMETRIC VIEW

- 1/2" PVC/VITON NPT BALL VALVE PRODUCT INLET

1/2" PVC/VITON -WYE-STRAINER

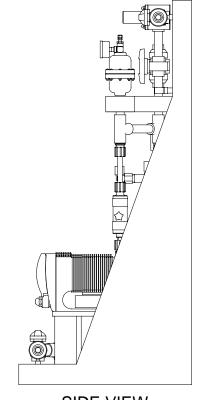

FRONT VIEW

40.00

38.25

3.62

MAXIMUM TESTING PRESSURE = 150 PSI DWG No MAXIMUM OPERATING PRESSURE = 29-150 PSI CHEMICAL SERVICE =

7749010-200 Α 1/1