



GALA0220 MAX. CAPACITY: 4.3 GPH @ 29 PSIG GALA0413 MAX. CAPACITY: 2.8 GPH @ 58 PSIG GALA0420 MAX. CAPACITY: 4.12 GPH @ 58 PSIG GALA0708 MAX. CAPACITY: 1.74 GPH @ 101 PSIG GALA0713 MAX. CAPACITY: 2.77 GPH @ 101 PSIG GALA1005 MAX. CAPACITY: 0.95 GPH @ 145 PSIG GALA1008 MAX. CAPACITY: 1.66 GPH @ 145 PSIG

GALA1605 MAX. CAPACITY: 0.87 GPH @ 232 PSIG

1/2" PVC/EPDM -WYE-STRAINER

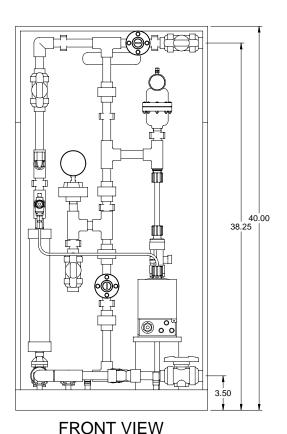

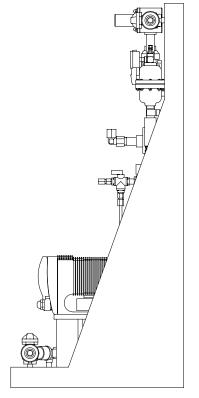

ISOMETRIC VIEW

PIPING SCHEMATIC

## NOTES:

- 1. ALL PIPING AND FITTINGS SHALL BE 1/2" SCH. 80 PVC SOCKET WELD WITH EPDM SEALS UNLESS OTHERWISE REQUIRED BY
- 2. ALL DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR REFERENCE ONLY.

Α	05/14/09	REVISED PER BASIC SKID	GJS						
0	02/01/08	FIRST ISSUE	GJS						
REV	DATE	DESCRIPTION	BY	APPD	REVD				
REVISIONS									

CUSTOMER PROMINENT FLUID CONTROLS INC. (PRE-ENGINEERED SYSTEM)

JOB No 7749049 PURCHASE ORDER No

""<del>"S</del>S1-D\_FLOOR\_050\_PVC\EPDM\_DEGASS\_PD\_FM **GENERAL ARRANGEMENT** 

ENGINEERS SEAL





	PITTSBURGH, PA USA			WWW.PROMINENT.US				
	PROMINENT FLUID CONTROLS LTD. 490 SOUTHGATE DRIVE. GUELPH, ONTARIO, CANADA N1H 6J3			PROMINENT FLUID CONTROLS INC.				
				RIDC PARK WEST				
				136 INDUSTRY DRIVE, PITTSBURGH P.A., USA. 15275				
	TEL. 519 836 5692	FAX. 519 836 5226	TEL. 4	112 787 2484 F	AX. 412 787 0704			
	DESIGNED	DESIGNED GJS		APPROVED				
	DRAWN	GJS	SCALE N.T.S.					
	CHECKED	DTH	DTH DATE 02/01/08					
				REV	PAGE			
49049-200				Δ	1/1			
	00 10 200	•			1/1			

SIDE VIEW MAXIMUM TESTING PRESSURE = 150 PSI MAXIMUM OPERATING PRESSURE = 29-150 PSI

CHEMICAL SERVICE =

- 1/2" O.D. REINFORCED PVC TUBING PUMP INLET AND OUTLET

- 1/2" PVC/EPDM NPT BALL VALVE PRODUCT INLET

7749049-200