


GALA1605 MAX. CAPACITY: 0.87 GPH @ 232 PSIG






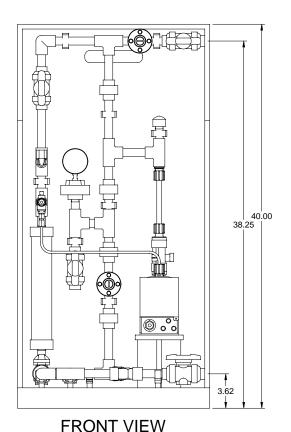

1. ALL PIPING AND FITTINGS SHALL BE 1/2" SCH. 80 PVC SOCKET WELD WITH EPDM SEALS UNLESS OTHERWISE REQUIRED BY COMPONENTS.

PIPING SCHEMATIC

2. ALL DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR REFERENCE ONLY.

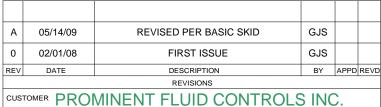

(PRE-ENGINEERED SYSTEM)

JOB No 7749053 PURCHASE ORDER No

TITLE SS1-D_FLOOR_050_PVC\EPDM_DEGASS_FM **GENERAL ARRANGEMENT**


ENGINEERS SEAL

DWG No





	PITTSBURGH, PA USA		WWW.PROMINENT.US			
	PROMINENT FLUID CONTROLS LTD.		PROMINENT FLUID CONTROLS INC.			
	490 SOUTHGATE DRIVE.		RIDC PARK WEST			
	GUELPH, ONTARIO, CANADA		136 INDUSTRY DRIVE,			
	N1H 6J3	PITTSBURGH P.A., USA. 15275		JSA. 15275		
	TEL. 519 836 5692	FAX. 519 836 5226	TEL. 4	112 787 2484	FAX. 412 787 0704	
	DESIGNED	GJS	APP	ROVED		
	DRAWN	GJS	SCA	ALE N.T.S.		
	CHECKED	DTH	DAT	E 02	2/01/08	
				REV	PAGE	
774	7749053-200			Α	1/1	

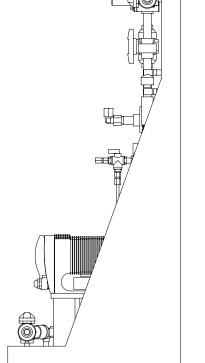

ISOMETRIC VIEW

1/2" PVC/EPDM -WYE-STRAINER

IEW	MAXIMUM TESTING PRESSURE =	150 PSI
	MAXIMUM OPERATING PRESSURE =	29-150 PSI
	CHEMICAL SERVICE =	•

- 1/2" PVC/EPDM NPT BALL VALVE PRODUCT INLET