


SIDE VIEW

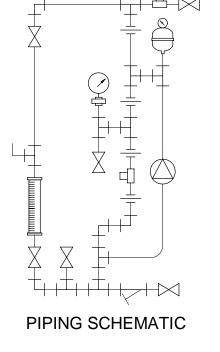

## NOTES:

- 1. ALL PIPING AND FITTINGS SHALL BE 1/2" SCH. 80 CPVC SOCKET WELD WITH VITON SEALS UNLESS OTHERWISE REQUIRED BY COMPONENTS.
- 2. ALL VALVES TO BE VENTED.
- 3. ALL DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR REFERENCE ONLY.

Α	05/14/09	REVISED PER BASIC SKID	GJS						
0	02/08/08	FIRST ISSUE	GJS						
REV	DATE	DESCRIPTION	BY	APPD	REVD				
REVISIONS									
CUSTOMER PROMINIENT ELLID CONTROLS INC									

## PROMINENT FLUID CONTROLS INC. (PRE-ENGINEERED SYSTEM)

JOB No 7749078

> SS1-A\_FLOOR\_050\_CPVC\VITON-V\_PD GENERAL ARRANGEMENT

PURCHASE ORDER No

THIS DRAWING IS THE PROPERTY OF PROMINENT FLUID CONTROLS INC. AND SHALL NOT BE COPIED OR TRANSFERRED WITHOUT THE WRITTEN CONSENT OF PROMINENT FLUID CONTROLS INC.

ENGINEERS SEAL

TITLE





	FILL	SBURGH, FA USA	v	V VV VV .PROIVIIN	EN1.03	
	PROMINENT FLUID CONTROLS LTD.		PROMINENT FLUID CONTROLS INC.			
	490 SOUTHGATE DRIVE.			RIDC PARK WEST		
	GUELPH, ONTARIO, CANADA N1H 6J3		136 INDUSTRY DRIVE, PITTSBURGH P.A., USA. 15275			
	TEL. 519 836 5692	FAX. 519 836 5226	TEL. 4	12 787 2484 F	AX. 412 787 0704	
	DESIGNED	GJS	APP	ROVED		
	DESIGNED DRAWN	GJS GJS	APP SCA		I.T.S.	
				LE N	I.T.S. /08/08	
	DRAWN	GJS	SCA	LE N		

MAXIMUM TESTING PRESSURE = 150 PSI DWG No MAXIMUM OPERATING PRESSURE = 145-150 PSI CHEMICAL SERVICE =

7749078-200

1/1 Α