



REV


Α

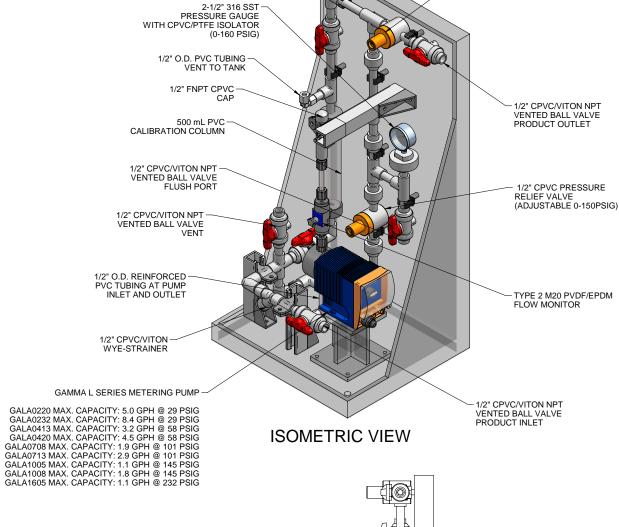

BLACK UV PROTECTED PP-STAND

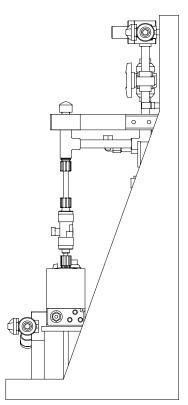

SIDE VIEW

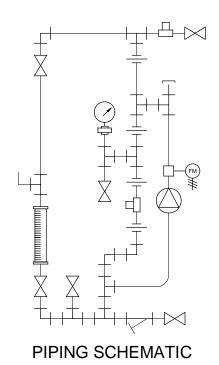

## NOTES:

- 1. ALL PIPING AND FITTINGS SHALL BE 1/2" SCH. 80 CPVC SOCKET WELD WITH VITON SEALS UNLESS OTHERWISE REQUIRED BY COMPONENTS.
- 2. ALL VALVES TO BE VENTED.
- 3. ALL DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR REFERENCE ONLY.

Α	05/14/09	REVISED PER BASIC SKID	GJS						
0	02/08/08	FIRST ISSUE	GJS						
REV	DATE	DESCRIPTION	BY	APPD	REVD				
REVISIONS									

CUSTOMER PROMINENT FLUID CONTROLS INC. (PRE-ENGINEERED SYSTEM)

JOB No 7749090

> SS1-C\_FLOOR\_050\_CPVC\VITON-V\_FM GENERAL ARRANGEMENT

PURCHASE ORDER No

THIS DRAWING IS THE PROPERTY OF PROMINENT FLUID CONTROLS INC. AND SHALL NOT BE COPIED OR TRANSFERRED WITHOUT THE WRITTEN CONSENT OF PROMINENT FLUID CONTROLS INC.


ENGINEERS SEAL

TITLE





	PITTS	SBURGH, PA USA		WWW.PROMINI	ENT.US		
	PROMINENT FLUID CONTROLS LTD.		PROMINENT FLUID CONTROLS INC.				
	490 SOUTHGATE DRIVE.			RIDC PARK WEST			
	GUELPH, ONTARIO, CANADA N1H 6J3		136 INDUSTRY DRIVE, PITTSBURGH P.A., USA. 15275				
	TEL. 519 836 5692	FAX. 519 836 5226	TEL. 4	112 787 2484 F	AX. 412 787 0704		
	DESIGNED	ESIGNED GJS		APPROVED			
	DRAWN	GJS	SCA	LE N	N.T.S. 2/08/08		
	CHECKED	DTH	DAT	E 02			
				REV	PAGE		
4	0000 000				4 /4		

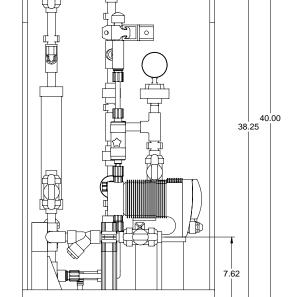

FRONT VIEW

MAXIMUM TESTING PRESSURE = 150 PSI MAXIMUM OPERATING PRESSURE = 29-150 PSI

- 1/2" CPVC BACK PRESSURE VALVE (ADJUSTABLE 0-150PSIG)

CHEMICAL SERVICE =

7749090-200 Α 1/1