

## NOTES:

- 1. ALL PIPING AND FITTINGS SHALL BE 1/2" SCH. 80 CPVC SOCKET WELD WITH EPDM SEALS UNLESS OTHERWISE REQUIRED BY COMPONENTS.
- 2. ALL VALVES TO BE VENTED.
- 3. ALL DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR REFERENCE ONLY.

PROMINENT FLUID CONTROLS INC.

FAX, 412 787 0704

ITTSBURGH P.A., USA. 15275

RIDC PARK WEST

EL. 412 787 2484

APPROVED

SCALE

36 INDUSTRY DRIVE,

BY APPD REVD

0	02/08/08	FIRST ISSUE	GJS		
REV	DATE	DESCRIPTION	BY	APPD	R
REVISIONS					
CUSTOMER PROMINENT FLUID CONTROLS INC.					
(PRE-ENGINEERED SYSTEM)					
JOB No		7749101 PURCHASE ORDER No			
TITLE SS1-E_FLOOR_050_CPVC\VITON-V_PD_FN					
GENERAL ARRANGEMENT					
THIS DRAWING IS THE PROPERTY OF PROMINENT FLUID CONTROLS INC. AND SHALL NOT BE COPIED OR TRANSFERRED WITHOUT THE WRITTEN CONSENT OF PROMINENT FLUID CONTROLS INC.					
E	NGINEERS SEAL	ProMire THE PROMINENT GROUP OF			(
		Proviment			
		PITTSBURGH, PA USA WWW.PROI	MINENT.	JS	

PROMINENT FLUID CONTROLS LTD.

GJS


490 SOUTHGATE DRIVE.

N1H 6J3 TEL. 519 836 5692

DESIGNED

DRAWN

GUELPH, ONTARIO, CANADA

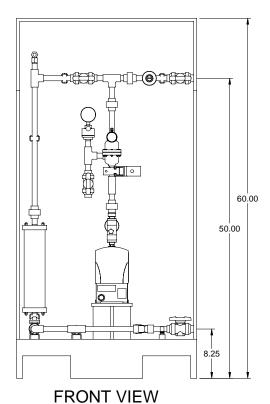

DWG No

SIDE VIEW

N.T.S. CHECKED DTH DATE 02/08/08 MAXIMUM TESTING PRESSURE = 150 PSI PAGE MAXIMUM OPERATING PRESSURE = 102-232 PSI 7749101-200 1/1 0 CHEMICAL SERVICE =