



DWG No

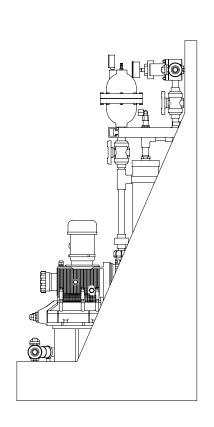

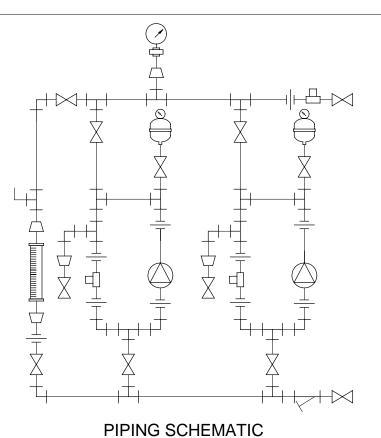

NOTES:

- 1. ALL PIPING AND FITTINGS SHALL BE 3/4" SCH. 80 PVC SOCKET WELD WITH VITON SEALS UNLESS OTHERWISE REQUIRED BY COMPONENTS.
- 2. ALL DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR REFERENCE ONLY.

Α	05/21/09	REVISED PER BASIC SKID	ALS						
0	01/18/08	FIRST ISSUE	GJS						
REV	DATE	DESCRIPTION	BY	APPD	REVD				
REVISIONS									

CUSTOMER PROMINENT FLUID CONTROLS INC. (PRE-ENGINEERED SYSTEM)

JOB No 7749386 PURCHASE

MS2B-E075_FLOOR_PVC\VITON_PD GENERAL ARRANGEMENT

THIS DRAWING IS THE PROPERTY OF PROMINENT FLUID CONTROLS INC. AND SHALL NOT BE COPIED OR TRANSFERRED WITHOUT THE WRITTEN CONSENT OF PROMINENT FLUID CONTROLS INC.

ENGINEERS SEAL





FILLS	BORGH, FA USA		V VV VV.FINOIVIIIN	LIVI.US		
PROMINENT FLUID CONTROLS LTD.			PROMINENT FLUID CONTROLS INC.			
490 SOUTHGATE DRIVE.			RIDC PARK WEST			
GUELPH, ONTARIO, CANADA			136 INDUSTRY DRIVE,			
N1H 6J3			PITTSBURGH P.A., USA. 15275			
TEL. 519 836 5692	FAX. 519 836 5226	TEL. 4	12 787 2484	FAX. 412 787 0704		
DESIGNED	GJS	APPROVED				
DRAWN	GJS SCALE N.T.S.					
CHECKED	DTH	DATE 01/18/08				
			REV	PAGE		

MAXIMUM TESTING PRESSURE = 150 PSI
MAXIMUM OPERATING PRESSURE = 100 PSI
CHEMICAL SERVICE =

7749386-200

A PAGE 1/1