

DULCOMETER® Instrumentation

Table of Contents

“DULCOMETER® Instrumentation” T.O.C.

VIII

CATALOG SECTION TABS

product overview	<ul style="list-style-type: none"> ■ Introduction ■ pump selection by capacity ■ chemical resistance list ■ Solenoid & Motor Pump Overview ■ Analytical Instrumentation Overview 	product overview
solenoid-driven metering pumps	<ul style="list-style-type: none"> ■ concept PLUS ■ beta ■ gamma/L ■ delta ■ extronic ■ mikro delta 	solenoid-driven metering pumps
motor-driven metering pumps	<ul style="list-style-type: none"> ■ Sigma/ 1 ■ Sigma/ 2 ■ Sigma/ 3 ■ ProMus ■ Makro ■ Orlita ■ DulcoFlex 	motor-driven metering pumps
pump spare parts & accessories	<ul style="list-style-type: none"> ■ solenoid pump spare parts ■ motor pump spare parts ■ pump accessories 	pump spare parts & accessories
DULCOMETER® instrumentation	<ul style="list-style-type: none"> ■ D1Cb/c ■ DACa ■ Dulcometer® Compact ■ DMT ■ DDC ■ MicroFlex ■ SlimFlex ■ MultiFLEX ■ AEGIS 	DULCOMETER® instrumentation
DULCOTEST® sensors	<ul style="list-style-type: none"> ■ amperometric sensors ■ potentiometric sensors ■ potentiostatic sensors ■ conductometric sensors ■ accessories 	DULCOTEST® sensors
polymer blending systems	<ul style="list-style-type: none"> ■ ProMix™-M (In-line Controls) ■ ProMix™-M (Batch & In-line Controls) ■ ProMix™-S ■ ProMix™-C 	polymer blending systems

ProMinent® DULCOMETER® Analyzers

DULCOMETER® Measuring and Control Units

DULCOMETER® measuring and control units combine maximum process safety with a broad application spectrum. Different measured variables can be accurately determined. Depending on the application, the control behavior of DULCOMETER® measuring and control unit is adapted to meet the relevant application. Different designs permit flexible use.

Advantages at a glance:

High measuring reliability, e.g. thanks to symmetrical input for pH/ORP

High measuring accuracy, e.g. thanks high-impedance input for pH/ORP

Minimum disturbance, e.g. thanks to alternating current disturbance suppression

Two-wire technology for disturbance-resistant measurement

Highly versatile thanks to many options and different designs

DULCOMETER® measuring and control units, DULCOTEST® sensors with ProMinent® metering pumps - the complete control cycle, measuring-controlling-metering and recording, everything from one single source, perfectly coordinated.

Function	Compact Controller	D1Cb	D1Cc	DACa
Measured variablen				
pH	✓	✓	✓	✓
ORP	✓	✓	✓	✓
Chlorine	✓	✓	✓	✓
Chlorine dioxide		✓	✓	✓
Chlorite		✓	✓	✓
Bromine		✓	✓	✓
Bromide				✓
Conductivity, conductive	✓			
Conductivity via mA		✓	✓	✓
Peracetic acid		✓	✓	✓
Hydrogen peroxide		✓	✓	✓
Ozone		✓	✓	✓
Dissolved oxygen		✓	✓	✓
Fluoride		✓	✓	✓
0/4-20 mA standard signal general measured variables		✓	✓	✓
Temperature				✓
Power supply				
90-253V ~	✓	✓	✓	✓
Method of installation, degree of protection				
Wall mounted IP 65		✓		
Panel mounted, IP 54			✓	
Combination housing (wall-mounting, control panel installation, pillar assembly) IP 67, IP 54	✓			✓
Measurement				
Number of measuring channels	1	1	1	1/2 selectable
Sensor monitoring	✓	✓	✓	✓
Temperature compensation for pH	✓	✓	✓	✓

ProMinent® DULCOMETER® Analyzers

DULCOMETER² Measuring and Control Units

Function	Compact Controller	D1Cb	D1Cc	DACa
pH compensation for chlorine				✓
Control				
PID controller	✓	✓	✓	✓
1-way controller (e.g. with pH acid or alkali)	✓			✓
2-way controller (e.g. with pH acid and alkali)		✓	✓	✓
Control inputs				
Digital inputs (sample water, parameter switching)	✓, 1	✓, 1	✓, 1	✓, 5
Control outputs				
Control of metering pump by pulse frequency	✓	✓	✓	✓, 2/4
Control of solenoid valve/motor-driven metering pump	✓	✓	✓	✓
Control of servomotor 3-P no feedback signal				✓
Feedforward control of flow via mA				✓
Feedforward control of flow via frequency (e.g. of contact water meter)				✓
Metering time monitoring with deactivation of the control variable	✓	✓	✓	✓
Limit value relay (for signalling limit value transgressions)	✓, 1	✓, 2	✓, 2	✓, 2
Timer relay (for time-dependent metering, optionally to limit value relay)		✓, 2	✓, 2	✓, 2
Outputs				
Analogue output 0/4...20 mA	✓, 1	✓, 1	✓, 1	✓, 2
Special functions				
Data logger with SD card				✓
Web server via LAN/WLAN				✓
Favourites menu				✓
Parameter set switchover via timer				✓
Parameter set switchover via contact				✓
PROFIBUS®-DP				✓
Subsequent function upgrade via activation key		✓	✓	✓
Operating hour counter		✓	✓	✓
Approvals				
MET (such as UL according to IEC 60010)				✓

ProMinent® D1Cb and D1Cc Analyzers

D1Cb/D1Cc Single Channel Controller

- Flexibly upgradable thanks to subsequent activation option for functions by means of activation code
- Equipped for the essential basic requirements in water treatment
- Large, illuminated graphic display
- Operator guidance with clear text menu available in 14 languages in the controller
- Automatic buffer detection for pH

Standard configuration

The following functions are included in the D1Cb/D1Cc controller (the measured variables depend on the type of connection of the measured variable)


- Sensor monitoring for pH
- Switchable between all measured variables via mV or mA
- 2 power relays for limit value monitoring or timer functions
- Metering time monitoring with switch-off of the control variable
- Extended range voltage supply: 90-253 V, 50/60 Hz
- mA sensor input safely protected against short-circuit and polarization reversal
- Method of installation, wall mounting: D1Cb
- Method of installation, control panel: D1Cc

Applications

- Waste water treatment
- Cooling water treatment
- Treatment of potable water
- Neutralization

ProMinent® D1Cb and D1Cc Analyzers

Technical Data



Wall Mount



Panel Mount

Measurement range:

Type of connection mV:

pH 0.00 ... 14.00

ORP +1000 mV

Type of connection mA:

Chlorine: 0.00...0.500/2.00/5.00/10.0/20.0/50.0/100.0 ppm

Chlorine dioxide: 0.00...0.500/2.00/10.0/20.0 ppm

Chlorite: 0.02...0.50/0.1...2 ppm

Bromine: 0.02...2.0/0.1...10.0 ppm

Ozone: 0.00...2.00 ppm

Hydrogen peroxide, sensor PER1: 2.0...200.0/20...2,000 ppm

Hydrogen peroxide, sensor PEROX: 0...20/200/2,000 ppm, 1 vol.%

Peracetic acid: 1...20/10...200/100...2,000 ppm

Dissolved oxygen: 0.1...10/0.1...20 ppm

pH: 0.00...14.00

ORP: 0...+1000 mV

Conductivity: 0...20/200/1,000 mS/cm

Resolution:

pH: 0.01 pH / ORP: 1 mV

Amperometric 0.001/0.01 ppm/l/0.1 %

Accuracy:

0.5 % from measurement range

Measurement input:

SN6 (input resistance > 0.5 x 10¹² Ω)

Correction variable:

Temperature via Pt 100 (conductivity or PT1000)

Correction range temp.: 50 - 113 °F (10 - 45°C) (pH and conductivity only)

Control characteristic:

P/PID control

Control:

2-way control

Signal current output:

1 x electrically isolated 0/4-20 mA

max. load 450 Ω

Adjustable range and direction (measured, correction and control variable)

Control outputs:

2 reed contacts (pulse rate, for pump control)

2 relays (pulse length, 3P or limit value)

1 x 0/4-20 mA

Alarm relay:

250 V~3 A, 700 VA changeover contact

Power supply:

90 - 253 V, 50/60 Hz

Ambient temperature:

Wall mounted: 23 - 122°F (-5 - 50°C)

Mounting

- **Wall mount:** Nonmetallic enclosure with protective gland-style strain relief cable sockets

Dimensions: 7.79"H x 7.87"W x 3.00"D (198 mm x 200 mm x 76 mm)

Weight: Approx. 2.6 lbs. (1.2 kg) Shipping Weight: 4.4 lbs. (2.0 kg)

Mounting: Detachable wall mount bracket

Protection class: NEMA 4X (IP 65)

- **Panel mount:**

Dimensions: 3.78"H x 3.78"W x 5.70"D (96 mm x 96 mm x 145 mm)

Protection class: NEMA 3 (IP 54) when mounted in panel

ProMinent® D1Cb and D1Cc Analyzers

Specifications

Temperature data (Panel Mount)

Permissible ambient temperature

Basic version:

Control panel installation: 32° to 122°F (0° to 50°C)

Installation in wall-mounted housing: 23° to 113°F (-5° to 45°C)

Extended version (with status feed-back or with correction value via mA or with disturbance variable via mA):

Control panel installation: 32° to 113°F (0° to 45°C)

Installation in wall-mounted housing: 23° to 104°F (-5° to 40°C)

Control panel installation: 14° to 158°F (-10° to 70°C)

Permissible storage temperature:

Material data/chemical resistance:

Part

Housing and frame

Rear panel

Membrane keypad

Seal, outside

Seal, inside

Retaining clip and screws

Material

PPO GF 10

PPE GF 20

Polyester film PET

Cellular rubber CR

Silicon-based sealing compound

Galvanized steel

Temperature data (Wall Mount)

Permissible ambient temperature

Basic version:

23° to 122°F (-5° to 50°C)

Installation in wall-mounted housing: 23° to 113°F (-5° to 45°C)

Extended version (with status feed-back or with correction value via mA or with disturbance variable via mA):

23° to 104°F (-5° to 40°C)

14° to 158°F (-10° to 70°C)

Permissible storage temperature:

Material data/chemical resistance:

Part

Housing

Membrane keypad

Housing seal

Outer seal

Retaining bracket

M5 screws

Material

Luranyl PPE GF 10

Polyester film PET

Cellular rubber CR

Cellular rubber CR

Galvanized steel

A2

Standards:

Supply voltage in accordance with DIN IEC 38

Electrical safety in accordance with EN 61010-1

Electromagnetic emitted interference in accordance with EN 55011 Gr.1/C1.A

CSA special inspection

Electrical data:

Rated voltage:

Max. power input:

Internal fuse protection:

Panel Mount

115/230 VAC, 50/60 Hz

140 mA at 115 V

70 mA at 230 V

Fine-wire fuse 5 x 20 mm

250 V slow-blow

100-115 V = 315 mA

200-230 V = 160 mA

Wall Mount

115/230 VAC, 50/60 Hz

120 mA at 115 V

60 mA at 230 V

Fine-wire fuse 5 x 20 mm

250 V slow-blow

100-115 V = 315 mA

200-230 V = 160 mA

Rated voltage:

Max. power input:

Internal fuse protection:

100/200 VAC, 50/60 Hz

150 mA at 100 V

75 mA at 200 V

Fine-wire fuse 5 x 20 mm

250V slow-blow

100-115 V = 315 mA

200-230 V = 160 mA

Electrical data for both wall mount and panel mount D1C's

Rated voltage:

Internal fuse protection:

24 VDC or 24 VAC, 50/60 Hz (low voltage operation only)

Fine-wire fuse 5 x 20 mm

250 V slow-blow, 100-115 V = 315 mA, 200-230 V = 160 mA

ProMinent® D1Cc and D1Cc Analyzers

Specifications (cont.)

product overview	Sensor input via SN6 socket:	Input impedance: $> 10^{12} \text{ W}$ Input impedance with reference electrode with respect to: Device ground: $< 1 \text{ kW}$ Input range: $\pm 1 \text{ V}$ Accuracy: $\pm 0.5\%$ of input range Resolution: 0.0625% of input range Connection facility for one potential equalization electrode (solution ground). As an alternative, two connection terminals can be connected with a wire jumper.
	Sensor input via terminals:	Input impedance: $> 5 \times 10^{11} \text{ W}$ Input impedance with reference electrode with respect to: Device ground: $< 1 \text{ kW}$ Input range: $\pm 1 \text{ V}$ Accuracy: $\pm 0.5\%$ of input range Resolution: 0.0625% of input range Connection facility for one potential equalization electrode (solution ground). As an alternative, two connection terminals can be connected with a wire jumper.
	Standard signal input for measured variable:	Input range: $0/4 \dots 20 \text{ mA}$ (programmable) Input impedance: 50 W (Panel Mount) and (Wall Mount) Accuracy: 0.5% of input range Resolution: $0.014/0.012 \text{ mA}$ Supply voltage and current for external electronics: $20 \text{ V} \pm 0.5 \text{ V}$, 20 mA
	Standard signal input for correction measured value or disturbance variable mA:	Galvanically isolated from remaining inputs and outputs Insulation voltage: 500 V Input range: $0/4 \dots 20 \text{ mA}$ (programmable) Input resistance: 50 W Accuracy: 0.5% of input range Resolution: $0.014/0.012 \text{ mA}$ Supply voltage and current for external electronics: $23 \text{ V} \pm 1 \text{ V}$, 20 mA (Panel) $19 \text{ V} \pm 1.5 \text{ V}$, 20 mA (Wall)
	Pt100 input:	Input range: $32^\circ \text{ to } 212^\circ \text{ F}$ ($0^\circ \text{ to } 100^\circ \text{ C}$)
solenoid-driven metering pumps	Pt1000:	Accuracy: $\pm 0.5^\circ \text{ C}$ Resolution: 0.1° C
	Digital inputs:	Common reference potential with respect to each other and with the RS 232 interface, but galvanically isolated from remaining inputs and outputs Insulation voltage: 500 V (Wall Mount only)
motor-driven metering pumps	Status signaling input:	Galvanically isolated from remaining inputs and outputs Insulation voltage: 500 V Potentiometer to be connected: $800 \text{ W} \dots 10 \text{ kW}$ Accuracy (without potentiometer error): 1% of input range Resolution: 0.5% of input range
	Current output:	Galvanically isolated from remaining inputs and outputs Insulation voltage: 500 V (Wall Mount only) Output range: $0/4 \dots 20 \text{ mA}$ (programmable) Maximum load: 600 W Accuracy: 0.5% of output range with respect to displayed value
pump spare parts & accessories	Frequency outputs (Reed relay)	Type of contact: n/o contact, interference suppressed with varistors Load capacity: 100 V peak , $0.5 \text{ A switching current}$ (Panel Mount) 25 V peak , $0.5 \text{ A switching current}$ (Wall Mount)
	for pump control:	Contact service life: $> 50 \times 10^6$ switching operations at contact load 10 V , 10 mA Max. frequency: 8.33 Hz (500 strokes/min) Closing time: 100 ms
DULCOMETER® instrumentation	Power relay output for alarm signaling:	Type of contact: Changeover contact, interference suppressed with varistors Load capacity: 250 VAC , 3 A , 700 VA Contact service life: $> 50 \times 10^6$ switching operations (Panel Mount) $> 20 \times 10^6$ switching operations (Wall Mount)

ProMinent® D1Cb and D1Cc Analyzers

Specifications (cont.)

<i>Power relay output</i>	Type of contact:	n/o contact, interference suppressed with varistors
<i>for control variable output</i>	Load capacity:	250 VAC, 3 A, 700 VA
<i>or limit value signaling:</i>	Contact service life:	>20 x 10 ⁶ switching operations

Electrotechnical Safety/Radio Interference Protection:

	EC low voltage directive (73/23/EEC) subsequently 93/44/EEC
	EC EMC directive (89/336/EEC) subsequently 92/31/EEC
	Supply voltage in accordance with DIN IEC 38
	Electrical safety in accordance with EN 61010-1
	Electromagnetic emitted interference in accordance with EN 55011 Gr. 1/CI B
	Noise immunity in accordance with IEC 801-2, -3, -4 or DIN VDE 0843, Part 2, Part 3, Part 4 or EN 50082-2
EN 60335-1:	Safety of electrical devices for domestic use
EN 50081-1:	EMC, emitted interference, residential
EN 50082-2:	EMC, noise immunity, industrial
EN 60555-2:	EMC, reactions in power supply networks, harmonics
EN 60555-3:	EMC, reactions in power supply networks, voltage fluctuations

ProMinent® D1Cb and D1Cc Analyzers

Fluoride Monitoring System

The D1C fluoride monitoring system incorporates the first buffer or reagent-free, ion specific sensor with a DULCOMETER® D1C fluoride monitor. The monitor features upper and lower limit relays with alarm, and analog output for recording.

Note: The fluoride D1C is for monitoring only.

Measuring Principle & Application

The D1C fluoride monitoring system is based on the principles of potentiometric measuring using a reagent-free, ion specific sensor & reference electrode. The fluoride sensor features a continuous electrode activation function, ensuring long-term stability of the measurement without the need for frequent recalibration or conditioning chemicals. The fluoride sensor automatically compensates temperature, but a temperature sensor is also used to compensate for fluctuation during application.


The fluoride sensor is recommended for use in water treatment only (patent pending). We recommend installation at atmospheric pressure.

Measuring Ranges & Operating Conditions of Fluoride Sensor

Measurement Range:	0.05 to 10 ppm fluoride
pH Operating Range:	5.5 to 8.5
Temperature Range:	34 to 95°F (1 to 35°C)
Max. Operating Pressure:	101.5 psi (7 bar) Note: the maximum admissible operating pressure for the monitoring system is 14.5 psi (1 bar) determined by the in-line sensor housing.
Sensor Response Rate T₉₀:	approx. 30 seconds
Reproducible Measuring Accuracy:	0.1 ppm
Measurement Water Flow Rate:	16 gph (60 L/h)

Fluoride Monitoring System

Part No.
7744836

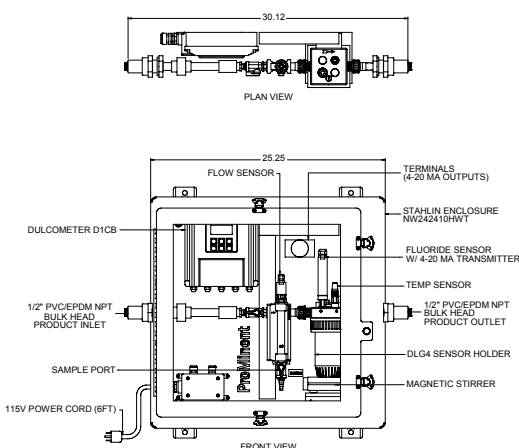

- D1C Fluoride Monitor
- Fluoride sensor: FLE 010 SE with PG 13.5 male threaded connector & SN6 plug
- Reference electrode REFP-SE with PG 13.5 male connector & SN6 plug
- Temperature sensor: PT 100 SE with PG 13.5 connector & SN6 plug
- 4-20 mA Measurement transducer: FV1 for connection to fluoride monitor & reference electrode
- DLG IV In-line sensor housing: with PG 13.5 threaded connector
- Sample outlet
- Magnetic stirrer and magnet
- PVC piping with ball stop/adjusting valve, rotameter with limit contact, sampling tap
- Sample inlet
- 115V Power cord, connectors from monitor to sensors
- PP Backpanel

Options

Stand Base	7744837
NEMA 4X enclosed	7744711
Heater	7744722
Sun shield	7744723

ProMinent® D1Cb and D1Cc Analyzers

Fluoride Monitoring System Accessories

Replacement Sensors

FLEP 010 Fluoride Sensor with PG 13.5 male threaded connector and SN6 plug	1028279
REFP-SE Reference Electrode with PG 13.5 male connector and SN6 plug	1018458
PT 1000 SE Temperature Sensor with PG 13.5 male connector and SN6 plug	1002856
FPV1 4-20 mA Measurement Transducer for connection to fluoride monitor and reference electrode	1028280

Fluoride Photometer

The D2TA or D2TB Photometer (see page 229) can be used to calibrate the fluoride monitor.

Measurement Range:	DT2A	0.05 to 2 mg/L fluoride
	DT2B	0.05 to 2 mg/L fluoride
		0.05 to 6 mg/L free or total chlorine
		0.01 to 11 mg/L chlorine dioxide

D2TA kit with carry case	1010383
D2TB kit with carry case	1010394

ProMinent® D1Cb and D1Cc Analyzers

Overview: Hydrogen Peroxide and Peracetic Acid

Measuring principle

The Perox measuring systems are based on amperometric/potentiostatic measuring principles incorporating several special features compared to conventional measuring technologies. The platinum [hydrogen peroxide (H_2O_2) measurement] or gold (peracetic acid measurement) working electrode with a small surface area is covered by a microporous membrane cap to achieve a degree of selectivity and independence from flow influences. The entire stainless steel shaft of the Perox sensor serves as the counter-electrode. This represents the complete sensor section for H_2O_2 measurement; a reference pH electrode is also required for peracetic acid measurement.

A special, continuous electrode activation facility which represents the actual know-how, ensures long-term stability of the measurement without the need for frequent recalibration.

Since all amperometric measure-

ment methods are relatively dependent of temperature, we recommend additional temperature compensation with the Pt 100 sensor if temperature fluctuations occur during applications. With the Pt 100, H_2O_2 measurement is a 2-electrode system while peracetic acid measurement is based on a 3-electrode system.

Applications

The environmentally-friendly substance hydrogen peroxide is used to an increasing extent in process control applications as an oxidizing or reduction agent. Examples of applications where continuous Perox H_2O_2 measurement control is used either alone or in advanced oxidation systems (with ozone, UV or Fenton's reagent) are:

- Odor control scrubbers
- Ground water purification
- Drinking water oxidation
- Utility water/cooling water disinfection
- Dechlorination, e.g. in chemical

processes

- Landfill leachate treatment
- Biotechnology
- Vat dying/textile industry
- Swimming pool water disinfection

Peracetic acid as a disinfectant is used in the following industries:

- Food and beverage
- Cosmetics
- Pharmaceuticals
- Medicine

Continuous measurement and control is necessary wherever more demanding requirements are made with regard to disinfection and quality assurance.

Increasing the peracetic acid concentration in CIP processes as well as concentration control in bottle cleaning machines are typical applications of Perox peracetic acid measurement.


Operating conditions

Measuring ranges and applications	H_2O_2	Peracetic acid
Measuring range (selectable) mg/l	1 - 20 / 10 - 200 / 100 - 2000	10 - 200 / 100 - 2000
pH range	pH 2.5 - 10	pH 1 - 8
Temperature range	32 - 104°F (0 - 40°C)	41 - 95°F (5 - 35°C)
Permissible changes in temperature	less than 0.9°F (0.5°C) per minute	
Sensor response rate T_{90} approx.	20 seconds	2 minutes
Reproducible measuring accuracy	better than 2% referred to end value of measuring range	
Min. conductivity of measurement solution at:		
measuring range 20 mg/L	50 $\mu S/cm$	-
measuring range 200 mg/L	200 $\mu S/cm$	500 $\mu S/cm$
up to 1000 mg/L	500 $\mu S/cm$	2000 $\mu S/cm$
up to 2000 mg/L	1000 $\mu S/cm$	4000 $\mu S/cm$
Measurement water flow rate	recommended 16 gph (60 L/h)	
Max. operating pressure	29 psig (2 bar)	

Depending on the application, other parameters or water constituents may be of significance. For instance, higher concentrations of surface-active substances, such as fats or tensides, or suspended solids can have a detrimental effect on the measurement.

ProMinent® D1Cb and D1Cc Analyzers

Hydrogen Peroxide Analyzers

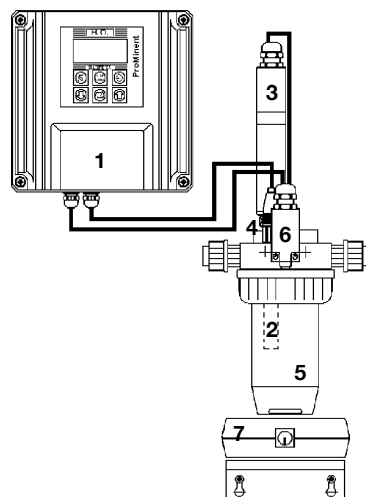Recommended Hydrogen Peroxide System
(descriptions follow)

Part No.

1 D1C H ₂ O ₂ Controller (1)	
1 Hydrogen Peroxide Sensor: H 2.10 P, complete with membrane cap (2)	792976
1 Perox signal converter: Perox-micro-H 1.20-mA (3)	741129
1 Connection between Perox signal converter and limit sensor Three-wire cable, priced per foot (specify length)	791948
1 Temperature Sensor: Pt 100 SE (4)	305063
1 Connection between the temperature sensor and the controller: (Based on distance between the controller and temperature sensor)	
Up to 30 ft. SN6 open end cable 6 ft. (2 m) long	305030
15 ft. (5 m) long	305039
30 ft. (10 m) long	305040
Over 30 ft. Signal converter 4-20 mA Pt 100 V1	809128
Two-wire cable - priced per foot (specify length)	7740215
1 DLG-PER In-line sensor housing (5) (includes limit sensor with 2 n/o contacts) (6)	1000165
1 Connection between the limit switch on the DLG-PER and the controller: Two-wire cable - priced per foot (specify length)	7740215
1 Magnetic stirrer 115 VAC (7)	7790915
1 Stirrer Magnet	7790916
1 Compact stand (PE, UV protected, black)	7740000
1 Power Cord, 6 ft.	741203

Accessories:

Replacement membrane cap: M 2.0 P for H ₂ O ₂ sensor	792978
Polishing paste for sensor, 3 oz. (90 g) tube	559810

Note: We can also provide measuring and control instruments mounted and wired, e.g. on PVC board or in a control cabinet. See PCM Systems in Feed & Control Packages section.

Sensors: Hydrogen Peroxide Measurement

The H₂O₂ sensor shaft is made of stainless steel (counter and reference electrode) with a platinum working electrode. Installation length 4.7" (120 mm), 0.5" (12 mm) Ø, PG 13.5 internal thread and SN6 plug connection.

H 2.10 P, complete with membrane cap	792976
--------------------------------------	--------

Temperature sensor Pt 100 for temperature compensation of H₂O₂ measurement; necessary when temperature fluctuations can occur in the measurement medium.

Pt 100 SE	305063
-----------	--------

A coaxial measuring line with an SN6 connector is required for direct connection of a temperature sensor:

SN6 open end 6 ft. (2 m) long	305030
SN6 open end 15 ft. (5 m) long	305039
SN6 open end 30 ft. (10 m) long	305040

When distances between the measuring unit and sensor exceed 30 ft. (10 m), it is recommended to use a temperature signal converter which transmits the temperature signal via a 2-wire connection at 4-20 mA. Temperature compensation input should be taken into consideration when selecting the D1C-Perox controller from the identity code.

Signal converter 4-20 mA Pt 100 V1	809128
Two-wire cable for connection between point-of-use signal converter 4-20 mA and controller - priced per foot (specify length).	7740215

ProMinent® D1Cb and D1Cc Analyzers

Hydrogen Peroxide Analyzers

Perox Signal Converter

The signal converter controls and activates the hydrogen peroxide sensor and evaluates the sensor signal. It is screw-mounted directly on the head of the sensor.

The signal converter has a length of approx. 8.1" (205 mm) and a 1.25" (32 mm) Ø.

Signal converter for H₂O₂ measurement

A changeover switch for the three measuring ranges 1 - 20, 10 - 200 and 100 - 2000 mg/L H₂O₂ is located on the inside.

Part No.

Perox-micro-H 1.20-mA

741129

In-line Sensor Housing

The DLG-PER in-line sensor housing must be used for hydrogen peroxide measurement where all (max. 3) individual sensors are installed in a measuring cup. A limit sensor must also be used which switches off the power supply for the signal converter when the measuring cup is removed. The DLG-PER in-line sensor housing features a body made of rigid PVC with a transparent polyamide cup and measurement water connection with 1/2" MNPT fittings.

DLG-PER In-line sensor housing
(includes limit sensor with 2 n/o contacts)

1000165

Two-wire cable for connection between the limit switch on the DLG-PER
and the controller - priced per foot (specify length)

7740215

For calibration of the DLG-PER in-line sensor housing, we recommend a
magnetic stirrer to facilitate flow independent calibration.

Magnetic stirrer 115 VAC

7790915

Stirrer magnet

7790916

Mounting bracket for magnetic stirrer PVC
(includes screws with wall anchor)

1000166

Accessories/Spare Parts

Replacement membrane cap:

M 2.0 P for H₂O₂


792978

Polishing paste for Perox sensor, 3 oz. (90 g) tube

559810

ProMinent® D1Cb and D1Cc Analyzers

Peracetic Acid Analyzers

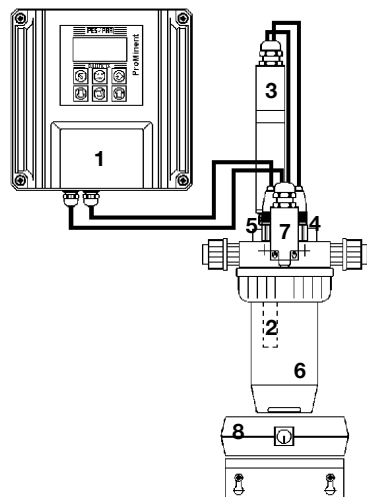Recommended Peracetic Acid System
(descriptions follow)

	Part No.
1 D1C PAA Controller (1)	
1 Peracetic Acid Sensor: P2.10 B, complete with membrane cap (2)	809150
1 Perox signal converter: Perox-micro-P 1.30-mA (3)	741128
1 Connection between Perox signal converter and limit sensor Three-wire cable, priced per foot (specify length)	791948
1 pH Sensor: REFP - SE (4)	1000505
1 Temperature Sensor: Pt 100 SE (5)	305063
1 Connection between the temperature sensor and the controller: (Based on distance between the controller and temperature sensor)	
Up to 30 ft. SN6 open end cable 6 ft. (2 m) long	305030
15 ft. (5 m) long	305039
30 ft. (10 m) long	305040
Over 30 ft. Signal converter 4-20 mA Pt 100 V1	809128
Two-wire cable - priced per foot (specify length)	7740215
1 DLG-PER In-line sensor housing (6)	1000165
(includes limit sensor with 2 n/o contacts) (7)	
1 Connection between the limit switch on the DLG-PER and the controller: Two-wire cable - priced per foot (specify length)	7740215
1 Magnetic stirrer 115 VAC (8)	7790915
1 Stirrer Magnet	7790916
1 Compact stand (PE, UV protected, black)	7740000
1 Power Cord, 6 ft.	741203

Accessories:

Replacement membrane cap: M 2.0 B for peracetic acid sensor	809154
Polishing paste for sensor, 3 oz. (90 g) tube	559810

Note: We can also provide measuring and control instruments mounted and wired, e.g. on PVC board or in a control cabinet. See PCM Systems in Feed & Control Packages section.

Sensors: Peracetic Acid Measurement

The peracetic acid sensor shaft is made of stainless steel (counter electrode) with a gold working electrode. Installation length 4.7" (120 mm), 0.5" (12 mm) Ø.

P 2.10 B, complete with membrane cap	809150
--------------------------------------	--------

A pH sensor is also required as a reference electrode for peracetic acid measurement

REFP - SE	1000505
-----------	---------

Temperature sensor Pt 100 for temperature compensation of peracetic acid measurement; necessary when temperature fluctuations can occur in the measurement medium.

Pt 100 SE	305063
-----------	--------

A coaxial measuring line with an SN6 connector is required for direct connection of a temperature sensor:

SN6 open end	6 ft. (2 m) long	305030
SN6 open end	15 ft. (5 m) long	305039
SN6 open end	30 ft. (10 m) long	305040

When distances between the measuring unit and sensor exceed 30 ft. (10 m), it is recommended to use a temperature signal converter which transmits the temperature signal via a 2-wire connection at 4-20 mA. Temperature compensation input should be taken into consideration when selecting the D1C-Perox controller from the identity code.

Signal converter 4-20 mA Pt 100 V1	809128
------------------------------------	--------

Two-wire cable for connection between point-of-use signal converter 4-20 mA and controller - priced per foot (specify length).

7740215

ProMinent® D1Cb and D1Cc Analyzers

Peracetic Acid Analyzers

Perox Signal Converter

The signal converter controls and activates the peracetic acid sensor and evaluates the sensor signal. It is screw-mounted directly on the head of the sensor.

The signal converter has a length of approx. 8.1" (205 mm) and a 1.25" (32 mm) Ø.

Signal converter for peracetic acid measurement

A changeover switch for the two measuring ranges 10 - 200 and 100 - 2000 mg/L peracetic acid is located on the inside; the standard scope of delivery includes a measuring line with SN6 plug connector to facilitate connection to the reference electrode.

Part No.

Perox-micro-P 1.30-mA

741128

In-line Sensor Housing

The DLG-PER in-line sensor housing must be used for peracetic acid measurement where all (max. 3) individual sensors are installed in a measuring cup. A limit sensor must also be used which switches off the power supply for the signal converter when the measuring cup is removed. The DLG-PER in-line sensor housing features a body made of rigid PVC with a transparent polyamide cup and measurement water connection with 1/2" MNPT fittings.

DLG-PER In-line sensor housing
(includes limit sensor with 2 n/o contacts) 1000165

Two-wire cable for connection between the limit switch on the DLG-PER
and the controller - priced per foot (specify length) 7740215

For calibration of the DLG-PER in-line sensor housing, we recommend a
magnetic stirrer to facilitate flow independent calibration.

Magnetic stirrer 115 VAC 7790915

Stirrer magnet 7790916

Mounting bracket for magnetic stirrer PVC
(includes screws with wall anchor) 1000166

Accessories/Spare Parts

Replacement membrane cap:
M 2.0 B for peracetic acid 809154

Polishing paste for Perox sensor, 3 oz. (90 g) tube 559810

ProMinent® diaLog DACa

diaLog DACa Multi-parameter Controller: Overview



The DULCOMETER® diaLog DACa multi-parameter controller is the new controller platform from ProMinent. It replaces the D1Ca/D2Ca controllers. The diaLog DACa can also be installed in a control cabinet using the optional mounting kit. The diaLog DACa has been specifically developed for the continuous control of liquid analysis parameters in water treatment processes, environmental technology and industry.

The DULCOMETER® diaLog DACa multi-parameter controller is available in a version with one or two measuring channels and can work with conventional analogue sensors and actuators. It is also equipped to communicate with digital sensors and actuators via the CANopen sensor/actuator bus. The diaLog DACa controller intelligently closes the control circuit between ProMinent® DULCOTEST® sensors and ProMinent® metering pumps offering special functions, as required in water treatment.

Typical applications

- Potable water treatment
- Waste water treatment
- Industrial and process water treatment
- Swimming pool water treatment

Standard equipment

- 1 or 2 measuring channels with 14 freely selectable measured variables
- PID controller with frequency-based metering pump control for 2 metering pumps.
- 2 analog outputs for measured value, correction variable or control variable (dependent on the optional equipment).
- 2 digital inputs for sample water fault detection, pause and parameter switching.
- 2 relays with limit value functions, timer and non-continuous control, 3-point step control (dependent on the optional equipment).
- Measured variables and language selection during commissioning.
- Temperature compensation for the pH and fluoride measured variables.
- Saving and transfer of device parameterization using the SD card.
- Subsequent upgrade of the software functions by means of an activation key or firmware update.

Optional accessories

- Second, complete measuring and control channel with second PID controller.
- PC configuration software*.
- Data and event logger with SD card.
- Measured value tendency display via controller display.
- Disturbance variable processing (flow) via mA or frequency.
- Compensation of the pH influence on chlorine measurement.
- 3 additional inputs, e.g. for level monitoring.
- PROFIBUS® DP *.
- ModBus RTU *.
- Visualization via LAN/WLAN web access *

* in preparation

NEW

ProMinent® diaLog DACa

diaLog DACa Multi-parameter Controller: Technical data

Measuring range

mV connection type

pH: 0.00 - 14.00

ORP voltage: -1,500 - +1,500 mV

Connection type mA

Chlorine, Chlorine dioxide, Chlorite, Bromine, Ozone, Hydrogen peroxide (PER sensor), Hydrogen peroxide (PEROX sensor with converter), Peracetic acid

Connection type mA

pH, ORP voltage, Fluoride

Conductivity

via Transmitter 0/4 - 20 mA

Temperature

via Pt 100/Pt 1000, measuring range 0 - 302 °F

Resolution

pH: 0.01

ORP voltage: 1 mV

Temperature: 32 °F

Amperometric analysis (chlorine etc.): 0.001/0.01 ppm, 0.01 vol. %, 0.1 vol. %

0.3 % based on the full-scale reading

Accuracy

Measurement input

pH/ORP (input resistance > 0.5 x 10¹² Ω)

Correction variable

Temperature via Pt 100/Pt 1000

Correction range

0 - 212 °F

pH compensation range for chlorine

6.5 - 8.5

Disturbance signals

Flow via mA or frequency

Control characteristic

P/PID control

Control

2 x bidirectional control

Signal current output

2 x 0/4 - 20 mA electrically isolated, max. load 450 Ω, range and allocation (measured, correction, control variable) can be set

Control outputs

2 x 2 pulse frequency outputs for metering pump control

2 relays (limit value, 3-point step or pulse length control)

2 x 0/4 - 20 mA

Alarm relay

250 V ~3 A, 700 VA contact type changeover contact

Electrical connection

90-253 V, 50/60 Hz, 25 VA

Ambient temperature

0 - 55 °F (for indoor installation or with protective housing)

Enclosure rating

Wall mounted: IP 67

Control cabinet mounting: IP 54

Tests and approvals

CE, MET (corresponding to UL according to IEC 61010)

Housing material

PC with flame proofing equipment

Dimensions

250 x 220 x 122 mm (WxHxD)

Weight

3 lbs.

ProMinent® diaLog DACa

Identcode Ordering System diaLog DACa

DACa	Version:															
	00	Wall mounted with ProMinent® logo														
		Operating voltage:														
		6	90 - 253 V, 50/60 Hz													
			Channel 1 (the measured variable is selected during initial commissioning):													
			1	Measurement + control, 2 pumps, 2 control inputs, 2 mA outputs												
				Channel 2 (the measured variable is selected during initial commissioning or software presetting):												
				0	No 2nd channel											
				2	Package 2: Disturbance variable (mA) or external setpoint specification via mA or pH compensation for chlorine (all acting on channel 1)											
				3	Package 3: 2nd measurement + control, additionally 2 pumps, additionally 3 control inputs											
				4	Package 4: 2nd measurement + control, additionally 2 pumps, additionally 3 control inputs, disturbance variable (mA or frequency), pH compensation for chlorine											
				Software presents:												
				0	No default settings											
				3	pH-/ORP measurement/control (pH 2 way, ORP 1 way)											
				4	pH-/Cl2 measurement/control (pH 2 way, chlorine 1 way)											
				5	pH-/ClO2 measurement/control (pH 2 way, chlorine dioxide 1 way)											
				6	pH-/Cl2 measurement/control with disturbance variable (pH 2 way, chlorine 1 way)											
				7	ClO2-/ORP measurement/control (chlorine dioxide 1 way, ORP for monitoring)											
				Channel connections:												
				0	Channel 1 / 2 via terminals (mA and mV)											
				1	Channel 1 via SN 6 coaxial connection (only for pH and ORP via mV)											
				2	Channel 2 via SN 6 coaxial connection (only for pH and ORP via mV)											
				3	Channel 1 and 2 via SN 6 coaxial connection (only for pH and ORP via mV)											
				Connection of digital sensors / actuators:												
				0	None											
				Communication:												
				0	None											
				Data logger:												
				0	No data logger											
				1	Data logger with measured value display and SD card											
				Hardware upgrade:												
				0	None											
				1	Protective RC circuit for power relay											
				Approvals:												
					01	None (CE standard)										
				Certificates:												
					0	None										
				Documentation language:												
						EN	English									
DACa	00	6	1	0	0	0	0	0	0	0	0	0	01	0	EN	

ProMinent® Compact Controller

Overview: Compact



DULCOMETER
Compact

The Measuring Transducer DULCOMETER® Compact with control function for the measured variables pH and redox provides basic functions for applications in water treatment. It has a fixed configuration with the following features.

Summary of advantages:

- Measured variables pH and ORP (can be changed on the controller)
- Operation independent of the operating language (use of abbreviations, such as CAL, PARAM, CONFIG, ERROR)
- Illuminated display
- 3 LED display operating state (relay 1 / 2 active, Error)
- Sensor monitoring for pH
- P and PID control characteristics
- Selectable control direction (raise or lower measured value)
- Pulse frequency relay for control of metering pump
- Power relay can be configured as an alarm, limit value or pulse width modulated control output for metering pumps (connection function or switch on operating voltage)
- Analog output 4-20 mA can be configured as a writer output or control output
- Digital input to switch off the control or to process a sample water limit contact by remote control
- Temperature sensor input (Pt 1000) for temperature compensation of the pH and chlorine value

Applications

- Waste water treatment
- Treatment of drinking water
- Swimming pool water treatment

Technical Data

Measurement range:	pH: 0.00 - 14 ORP: -1000 - +1000 mV
Resolution:	pH: 0.01 pH ORP: 1 mV
Correction variable:	Temperature for pH via Pt 1000
Correction range:	32 - 248 °F, (0 - 120 °C)
Control characteristic:	P/PID
Control:	1-way controller with selectable control direction (raise/lower)
Signal current output:	1 x 4-20 mA galvanically isolated max. load 400 Ω Range and assignment (measured or actuating variable) can be set
Control outputs:	1 pulse frequency output for control of the metering pump 1 relay (alarm or limit value relay or pulse length control) 1 x analog output 4-20 mA
Electrical connection:	90 - 253 V ~
Ambient temperature:	14 - 140 °F, (-10 - +60 °C)
Enclosure rating:	IP 67
Dimensions:	135 x 125 x 75 mm (H x W x D)
Weight:	1.10 lbs, (0.5 kg)

Part no.

Compact controller for pH/ORP

1035638

ProMinent® DMT Transmitters

Overview: DMT


DULCOMETER® DMT type transmitters are compact 2-wire transmitters for measured variables pH, redox, chlorine, conductive conductivity, temperature. Easily combined with programmable memory controllers.

Summary of advantages:

- Reliable measurement
- High level of operating safety, e.g. probe monitoring (pH), electrical isolation
- Simple flexible installation
- Full text user guidance
- Automatic buffer recognition (pH)
- Autoranging (conductivity)
- Compact design
- Switch between pH, redox and temperature

Applications: process control, food and beverage industry, chemical and pharmaceutical industries, water treatment, waste water treatment, power plant

Technical Data

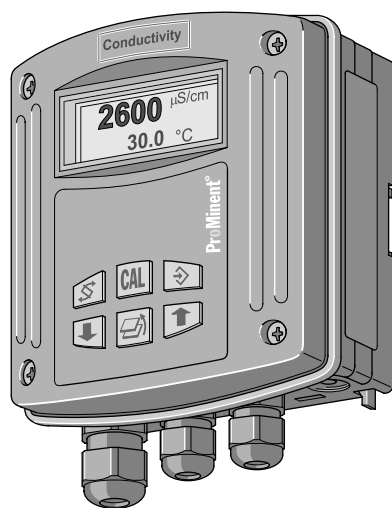

Measurement range:	pH -1.00 - 15.00 -1200...+1200 mV redox voltage 0.01...50.0 ppm/l chlorine -20 - +150 °C 1 µS/cm - 200 mS/cm (autoranging)
Cell constant:	0.006...12.0/cm for conductivity
Resolution:	pH 0.01 1 mV 0.1 % from measurement range for chlorine 0.1 °C Conductivity 1/1000 of display value (min. 0.001 µS/cm)
Reproducibility:	0.5 % from measurement range
Measurement input:	mV terminal (pH, redox); input resistance >5 x 10 ¹¹ Ω Chlorine terminal (DMT chlorine probes) Pt 100/1000 terminal Conductivity terminal (2 or 4 wire connector)
Correction variable:	Temperature via Pt 100/1000 (pH, chlorine, conductivity)
Correction range:	chlorine: 5 - 45 °C, pH: 0 - 100 °C, Cond: 0 - 100 °C
Current output:	4 - 20 mA, fault current 23 mA
Supply voltage:	16 - 40 V DC
Feed voltage:	2-wire transmitter, 16 - 40 V DC, nominal 24 V PROFIBUS® DP version, 16 - 30 V DC, nominal 24 V communication interface:
Communication interface:	PROFIBUS® DP (wall-mounted version only)
Ambient temperature:	-5 - +55 °C
Climatic conditions:	up to 95 % relative humidity (non-condensing)
Enclosure rating:	IP 65 (wall/pipe mounted) IP 54 (control panel installation)
Display:	graphical display
Housing:	PPE
Dimensions:	125 x 135 x 75 mm (WxHxD)
Weight:	approx. 450 g

A complete measuring station comprises the following:

- Measuring transducer DMTa (see Identcode)
- In-line probe housing: DGMa..., DLG III ..., immersible in-line probe housing
- Chlorine sensor
- Assembly set for chlorine sensor
- pH sensor
- Redox sensor
- Temperature sensor Pt 100 /Pt 1000
- Conductivity sensor
- Sensor cable
- PROFIBUS®-DP connection accessories

ProMinent® DMT Transmitters

Identcode Ordering System

DMT		Version:											
	A												
		Type of Mounting:											
		W	Wall mounted (also rail mounted)										
		S	Control panel installation ¹										
		Logo:											
		0	With ProMinent® logo										
		Electrical connection:											
		9	Ring main 4-20 mA (two wire technology), operating voltage 16-40 V DC, nominal 24 V DC										
		5	PROFIBUS® DP, operating voltage 16 - 30 V DC, nominal 24 V DC (only if communication interface = PROFIBUS® DP)										
		Communication interface:											
		0	None										
		4	PROFIBUS® DP (assembly type W only)										
		Measured variable 1:											
		P	pH										
		R	Redox										
		T	Temperature										
		C	Chlorine										
		L	Conductivity										
		Measured variable 2 (Correcting value):											
		1	Temperature Pt 1000 / Pt 100										
		0	None (in the case of measured variable T)										
		Enclosure rating:											
		0	Standard										
		Language:											
		E	English										
		Presetting A, probe:											
		0	Standard ProMinent® buffer solution pH 4-7-10										
		Presetting B, probe:											
		0	Autom. Temperature measurement (standard)										
		1	Manual temperature measurement										
		2	Autom./manual temperature measurement										
		9	No temperature measurement										
		Presetting C, output:											
		0	Prop. Measured variable (standard)										
		1	Manual adjustable current value										
		2	Proportional or manual										
		3	Proportional or manual hold										
		4	4 mA constant current										
		Presetting C:											
		0	Standard										
DMT	A	W	0	9	0	P	1	0	E	0	0	0	0

ProMinent® DDC Analyzers

Overview: DDC



pk_5_045

The Multi-channel Measuring and Control System DULCOMARIN® II has the following features:

- 5.7", 1/4 VGA color display for ease of operation
- Integrated data logger with screen recorder: Directly view the measured data on the controller
- SD card and card reader included: simply transmit measured data to the PC as standard
- Control of one to 16 drinking water systems or filtration circuits in swimming pools
- CAN bus system: Simple wiring and can be subsequently upgraded
- Visualization*: Simple with embedded web server* and standard web browser
- LAN port*: Simple connection to PC or PC network or internet
- Operation possible using Apple® iPod or iPad (WLAN access point needed)
- Intelligent sensors: with CANOpen bus, save the sensor data and stay within the optimum measuring range thanks to auto ranging
- Intelligent metering pumps: using CANOpen bus obtain information on operating parameters, such as for instance: chemicals levels and pump capacity in the metering range of 0.19-272 gph (0.74 - 1,030 l/h)
- Standby metering pump for disinfectant (automatic switchover in the event of low level and pump malfunction)

Area of application drinking water (and general applications)

Using a power input module (I module), the following measuring parameters can be measured via 4-20 mA and displayed. These values are also available on the data logger/screen recorder, the web and OPC server:

- Flow (as disturbance variable for pH and chlorine control)
- UV intensity
- Conductivity
- Chlorine dioxide
- Chlorite
- Ammonia
- Fluoride

Pt100 resistance thermometer via a transducer

Display and control of free chlorine and total available chlorine

OPC server*: Simple connection to superordinate visualization systems

*optional

Area of application swimming pools

Remote calibration possible using Apple® iPod or iPad (WLAN access point needed)

Energy and chemical savings thanks to new EcoMode

Integral filter control

Bound chlorine: is reliably minimized via controller output and corresponding systems

OPC server*: Simple connection to superordinate visualization systems

Control of pool temperature via standard temperature controller (Pt100x needed)

High chlorination or night setback by means of contact via second parameter set

The decentralized modular DULCOMARIN® II system is designed for use in public swimming pools in compliance with DIN 19643. The system can be configured to meet the demand for a compact DULCOMARIN® II compact system or as a decentralized modular system DULCOMARIN® II DULCO®-Net.

The areas of application are determined in the identcode

Every drinking water measurement system or every filtration circuit features its own on-site calibration option for all measured variables.

What is the Eco!Mode operating mode?

Eco!Mode enables the circulation capacity to be reduced if the DIN hygienic parameters pH, redox, free and bound chlorine are within the permitted limits.

A circulation pump with frequency converter with an analog input is needed for this.

This reduction can be enabled depending on the DIN hygienic parameters, time and activation via a remote control input. A combination of the criteria is also possible. If the DIN hygienic parameters can no longer be met, then the circulation capacity is raised again to nominal capacity.

Lowering the pump capacity saves energy, thereby reducing CO₂ emissions.

Furthermore, when a set redox potential is reached, for instance 780 mV, signaling good disinfection of the water, then chlorine metering is either reduced gradually or in one step. If the DIN hygienic parameters can no longer be met, then chlorine metering is raised again to its standard set point.

What is a web server?

A web server is a software application that is implemented by the DULCOMARIN® II.

The web server provides web pages with information about measurements, control, sensor calibration and controller configuration to a PC with web browser (e.g. Microsoft® Internet Explorer).

The web server can be used to provide simple visualization of the DULCOMARIN® II without special visualization software being needed on the PC. The web server is independent of the PC operating system.

The DULCOMARIN® II is connected to a PC via a LAN/Ethernet port and the connection can be made directly, via a network or via the internet. The cables needed for direct connection to a PC or network are included.

Commercially available standard network components can be used for the cabling, router and WLAN access points etc.

The same information is available via the web server as on the DULCOMARIN® II itself, for instance the set points of all control variables can be changes, the various controller can be switched off and the pool/system names can be entered. Exceptions to this are the controller settings and bus configuration that can only be entered directly on the controller itself.

What is OPC?

OPC stands for Openness, Productivity, Collaboration (formerly OLE for Process Control) and designates a uniform and manufacturer-independent software interface. OPC Data Access (OPC DA) is based on Windows technology COM (Component Object Model) and DCOM (Distributed Component Object Model). In contrast, OPC XML is based on the internet standards XML, SOAP, and HTTP.

OPC is used wherever sensors, controllers, and controls from various manufacturers are used to form a common, flexible network. Without OPC, two devices require precise knowledge of the communication options of the other device to be able to exchange data. Extensions and replacement are therefore correspondingly difficult. With OPC, an OPC-compliant driver for each device has to be written only once. Ideally this driver is provided by the manufacturer. An OPC driver can be integrated easily in any major control and monitoring system without needing much in the way of adaptation.

ProMinent provides an OPC server/driver for the Multi-channel Measuring and Control System DULCOMARIN® II.

The examples shown below are suitable for applications in drinking water treatment and swimming pool systems.

ProMinent® DDC Analyzers

Overview: DDC

The multi-channel measuring and control system DULCOMARIN®II is suitable to control 1 to 16 filtration circuits or drinking water systems. The following bus modules are available for the control:

M module (measurement and controlling):

- Measurement and control of the pH value
- Measurement and display (optional control) of the ORP
- Measurement and display of the temperature of the sample water
- Sample water monitoring
- Measurement of free chlorine
- Measurement of combined chlorine (optional, calculated from total chlorine and free chlorine)

Chlorine sensors:

- Measurement of free chlorine and temperature
- Measurement of total available chlorine and temperature
- Measurement of combined chlorine as differential chlorine measurement

A module (controlling of metering pumps, analog outputs):

- 3 frequency outputs to control metering pumps for pH correction, disinfection and flocculent metering
- 3 contact inputs to process pump alarm relays or tank fill level monitoring
- 4 freely programmable analog outputs 4-20 mA for pH, ORP, free chlorine, combined chlorine or temperature

P module (controlling of peristaltic pumps, power supply of bus modules):

- Power relay pulse length control for pH value (e.g. controlling of peristaltic pump)
- Power relay pulse length control of disinfectant (e.g. controlling of chlorine electrolysis plant)
- Power relay limit value output to minimize combined chlorine
- Alarm relay
- Power supply of bus modules

N module (power supply of bus modules):

- Power supply of bus modules with no further function

R module (controlling of chlorine gas metering units):

- Controlling of a chlorine gas metering unit and processing of a position feedback potentiometer (0-10 kΩ) (only possible as external module)

Metering pumps with CANopen interface of the type Beta®, delta®, Sigma/ 1, Sigma/ 2, and Sigma/ 3

- Direct connection to the bus
- When using Beta®/4aCANopen metering pumps, the A module is not required (provided no current outputs are required).

I module (current input module)

- 2 current inputs active/passive (e.g. to connect 2-wire measuring transducers)
- 1 current inputs passive (e.g. to connect a magnetically-inductive flow meter)
- 2 digital inputs for sample water alarm and pause control

G module (limit value and alarm module)

- 2 potential-free changeover relays to signal alarm states
- Connected to other units via the main bus cable using the T-distributor and 0.5m CAN connection cable supplied

ProMinent® DDC Analyzers

Technical Data

Measurement range:	pH: -1 - 15 Redox: -1200 - +1200 mV Chlorine free: 0.01 - 10 ppm Chlorine total: 0.01 - 10 ppm Combined chlorine: 0.01 - 2 ppm
Temperature:	Pt 100 or Pt 1000, 28 to 302 °F (-20 to +150 °C)
Resolution:	0.01 pH / 1 mV / 0.01 ppm / 0.1 °C
Reproducibility:	0.5 % of the measurement range (at 25 °C)
Measurement inputs:	pH and Redox via terminal mV Chlorine via CANopen Bus
Control type:	P/PI/PID-control
Control:	Acid or alkali, chlorine
Digital inputs:	Voltage free inputs (sample water, pause, 3 pump faults)
Signal current outputs:	4 x 0/4-20 mA (electrically isolated for each measured variable) Max. burden 600 Ω , range adjustable
Control outputs:	Reed contacts, acid, alkali and chlorine (pulse rate for actuation of metering pumps) 2 relays (pulse length) make/break switches for actuation of solenoid valves or peristaltic pumps 250 V~, 3 A
Alarm relay:	250 V ~3 A, 700 VA make/break switches
Interfaces:	LAN, RS 232 as configuration interfaces, SD-expansion slot (for SD cards)
Power supply:	85 - 265 V~, 50/60 Hz
Ambient temp. :	23 to 118°F (-5 to 45 °C)
Storage temp. :	14 to 158°F (-10 to 70 °C)
Enclosure rating:	IP 65
Climate:	Admissible relative humidity: 95% non condensing DIN IEC 60068-2-30
Dimensions:	342 x 227 x 78 mm (WxHxD)

Guaranteed CANopen specifications, all devices:

All devices meet the standardized CAN specification for hardware 2.0 (ISO99-1, ISO99-2). This includes the CAN protocol (ISO 11898-1) and details about the physical application layer in accordance with ISO 11898-2 (high speed CAN to 1Mbit/sec.) and ISO 11898-3 (Low speed CAN to 125kBit/sec).

The device complies with the CAN-Open specification CIA-DS401, the basis of the European standard EN50325-4. It complies with the controller device profile CiA-404.

ProMinent® DDC Analyzers

Identcode Ordering System

DULCOMARIN® II DXC range

DXCa	Mounting type										
	W	Wall mounted (IP 65)									
	S	Control cabinet (IP 54)									
	Version										
	0	with operating elements									
	D	with operating elements for use in drinking water/disinfection applications									
	Communication interfaces										
	0	None									
	5	Embedded Web Server, LAN including 5m LAN patch cable 1:1, LAN coupling, 5m crossover cable ¹									
	6	OPC server + embedded web server, LAN including 5m LAN patch cable 1:1, LAN coupling, 5m crossover cable									
	Options										
	0	None									
	1	Videographic recorder with data logger including SD card and USB card reader for PC									
	Module 1:										
	M	M module, measurement module for pH, ORP, temperature									
	A	A module, control module: 3 pump and 4 analog outputs									
	I	I module, current input module, 3 mA, 2 digital inputs									
	Module 2:										
	0	Not in use									
	A	A module, control module: 3 pump and 4 analog outputs									
	M	M module, measuring module pH, ORP, temperature									
	I	I module, current input module, 3 mA, 2 digital inputs									
	Module 3:										
	P	P module, mains power module, 1 alarm relay, 3 solenoid valve relays									
	N	N module, mains power module without relay									
	Application:										
	S	Swimming pool									
D	Drinking water/disinfection										
Preset language:											
EN	English										
Approvals:											
01	CE-mark										

DXCa	W	0	0	0	0	M	0	P	S	EN	1
------	---	---	---	---	---	---	---	---	---	----	---

The Identcode describes the **DULCOMARIN® II compact** controller.

- 1 The supplied cable is intended for the connection to a hub, switch, router, or Internet.
 For a direct connection of the DULCOMARIN® II to a PC/MAC, the supplied LAN coupling and the crossover cable cat. 5 are required.
 The maximum LAN cable length is approx. 100 m.
 To operate the Web server on a PC we recommend using Microsoft Internet Explorer 5 or higher as browser.
 The following components are supplied in the DXCa package:
 1 T-distributor, 1 connecting cable CAN,
 1 termination resistor coupling and
 1 termination resistor plug,
 1 SC card, 1 card reader for PC.

Important note when ordering multi-channel measuring and control systems for drinking water and pool water applications:


Drinking water application: In the identcode, a "D" for "Drinking water/disinfection" must be selected under "Version" and "Application". The description "System" will appear in the controller menu for the different drinking water lines.

Swimming pool water applications: In the identcode, a "0" for "with operating elements" must be selected under "Version" and the an "S" for "Swimming pool" under "Application". The description "Tank" will appear in the controller menu for the different filter circuits.

All adjustment options and the use of the different modules are identical with both applications.

ProMinent® DDC Analyzers

Configuration

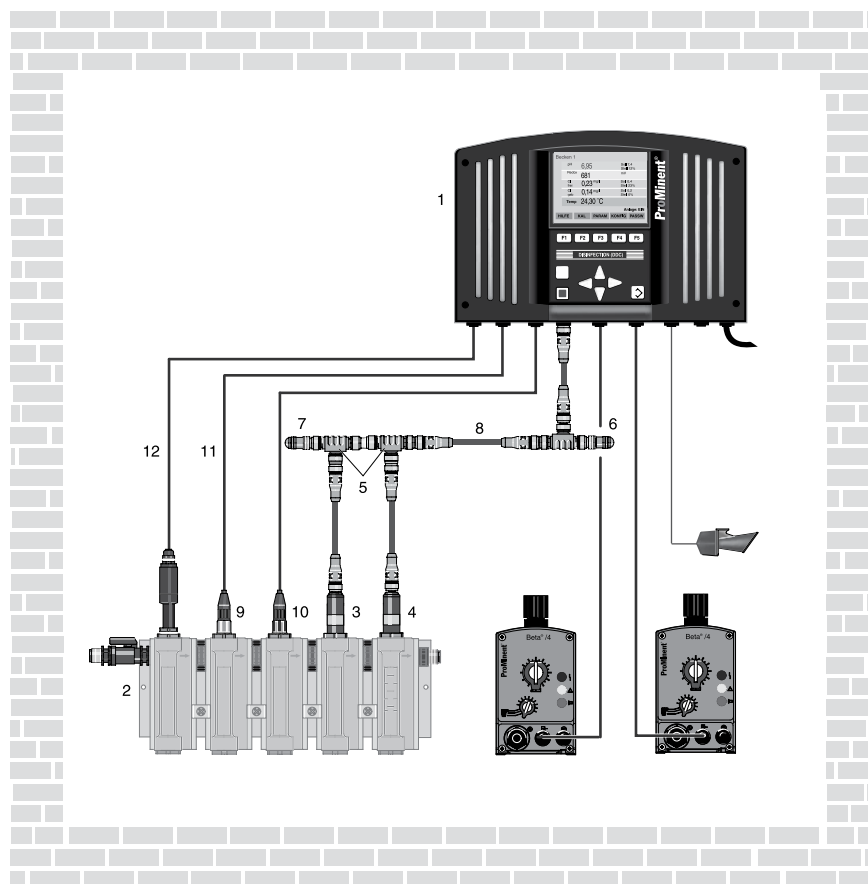

pk_5_020

The measurement and control system shown above for a single system comprises the following components (without metering equipment):

Item	Quantity	Name	Part No.
1	1	DULCOMETER® (DDC) central unit with actuator and measurement modules DXCa W 0 0 0 M A P 0 EN 01	
2	1	DULCOTEST® in-line probe housing DGMa 3 2 2 T 0 0 0	
3	1	Chlorine sensor CTE 1-CAN-10 ppm	1023427
4	1	Chlorine sensor CLE 3.1-CAN-10 ppm	1023426
5	3	T-distributors M12 5 pole CAN	1022155
6	1	Load resistor M12-coupler	1022154
7	1	Load resistor M12-plug	1022592
8	5	Connecting cable - CAN M12 5 (pole). 1.5 ft (0.5 m)	1022137
9	1	pH electrode	As per application
10	1	Redox electrode	As per application
11	2	Coaxial cable, 6 ft. (2 m) - SN6 - pre-assembled*	1024106
12	6 ft. (2 m)	2 wire cable	7740215

* other lengths available

ProMinent® DDC Analyzers

DULCO®-Net

The DULCOMETER® (DDC) DULCO®-Net control system uses the CANopen – BUS as the medium for transmission of the data between the measurement and actuator units and the sensors and the central unit.

In its maximum expanded form the system can control up to 16 systems, i.e. 16 measurement units and 16 dosing units and corresponding sensors can be operated from a single central unit.

For this purpose a central unit is combined with the number of measurement and dosing units required for the application.

A M12 T-distributor is required for connection to any CANopen device (sensors module, actuator module, metering pumps and chlorine sensors). This connects the device to the main bus via a stub cable.

The sum of the lengths of all stub cables in a CANopen system cannot exceed 45 ft. (15 m.)


DULCOMETER® (DDC) DULCO®-Net and compact can both be easily expanded later.

What components make up a DULCOMETER® (DDC) DULCO®-Net system?

A DULCOMETER® (DDC) DULCO®-Net system comprises:

- One central unit **and** an individual combination of the following components:
- Measurement unit
- Dosing unit without main power module
- Dosing unit with main power module (optional)
- Chlorine gas dosing unit

Central unit

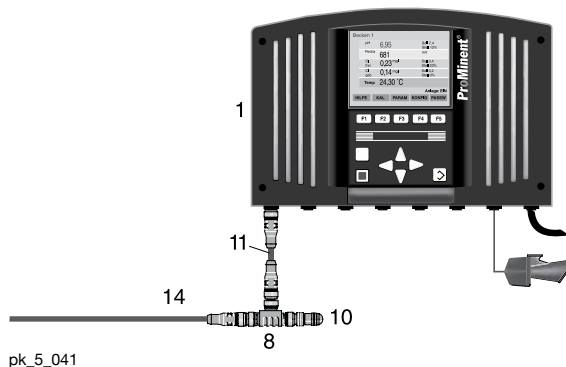

The central unit can be installed anywhere, e.g. in a control room or in the office. It serves as an input/output module (for viewing and configuring individual modules) and has the following functions: screen recorder, interface, Embedded Web Server and power supply. The central unit may optionally incorporate a sensor and an actuator module. The central unit is connected with the other units via the main Bus. CAN connection cables are used for this purpose. The main Bus of the first unit must be connected with a M 12 load resistor coupling and the final unit with a M 12 load resistor plug.

A unit always consists of a module, a T-connector and a CAN stub connection cable, 1.5 ft. (0.5 m) long.

The central unit in the above example comprises the following components:

Item	Quantity	Name	Part No.
1	1	DULCOMETER® (DDC) Central unit DXCa W 0 5 1 M A P 0 EN	
8	1	T-distributor M12 5 pole. CAN	1022155
1	1	Connecting cable - CAN M12 5 pole. 0.5 m	1022137
14	1	Connecting cable - CAN M12 5 pole 5 m	1022141
10	1	M 12 load resistor coupling	1022154

ProMinent® DDC Analyzers

DULCO®-Net

The multi-channel measuring and control system DULCOMARIN®II DULCO®-Net in the maximum configuration can control 16 drinking water systems/filtration circuits, i.e. the required external modules for 16 pools can be connected to the central unit and operated. The following options are given.

Measurement and controlling of:

- Up to 16 times:
- pH value
- ORP
- free chlorine
- combined chlorine (calculated)
- Temperature of the sample water

Additionally in the drinking water application (via I module):

- Flow rate (as disturbance for pH and chlorine control)
- UV intensity
- Conductivity
- Chlorine dioxide
- Chlorite
- Ammonia
- Fluoride
- Pt100 resistance thermometer via transducer

Other inputs and outputs:

Up to 16 times:

3 frequency outputs to control metering pumps for pH correction, disinfection and flocculent metering

3 contact inputs to process pump alarm relays or tank fill level monitoring

4 freely programmable analogue outputs 0/4-20 mA (for pH, ORP, free chlorine, combined chlorine or temperature)

3 power relays pulse length control of pH value, of the disinfectant and minimization of combined chlorine (e.g. controlling of a peristaltic pump and chlorine electrolysis plant and UV plant)

Controlling of a chlorine gas metering unit

3 Beta®/4CANopen metering pumps

Developed by Bosch and known from the automotive industry, the very fail safe CAN bus with CANopen protocol is used to transfer data between the different bus modules. The maximum length of the main bus train is 400 meters.

For connecting any bus module (M module, A module, P module, N Module, Beta®/4CANopen metering pumps and CAN chlorine sensors), a T-distributor is used which connects the units with the main bus train via a spur line.

T-distributor and spur line are included in the modules' delivery scope.

All bus modules are supplied with 24 V operating voltage via the CAN bus (except Beta®/4CANopen metering pumps, P modules, N modules. These require a separate power supply).

For this reason, additional P or N modules that supply operating voltage for the bus modules on the bus are required depending on the size of the installation (number of filtration circuits to be controlled). The central unit always includes a power supply unit (N or P module).

How many additional N or P modules do you require?

Number filtration circuits	Additional N or P modules	Number filtration circuits	Additional N or P modules
1	-	9	4
2	-	10	5
3	1	11	5
4	2	12	6
5	2	13	6
6	3	14	7
7	3	15	7
8	4	16	8

The DULCOMARIN®II compact and DULCO®-Net can be upgraded subsequently by simply connecting bus modules

ProMinent® DDC Analyzers

DULCO®-Net

Which components are included in a DULCOMARIN®II DULCO®-Net system?

A DULCOMARIN®II DULCO®-Net system consists of one:

Central unit DXCa with controls and the individual combination of the following components:


- M module:** DXMaM (measurement and controlling)
- A module:** DXMaA (controlling of metering pumps, analog outputs)
- P module:** (module in DXCa housing to supply power to modules and alarm relays, power relays to control e.g. peristaltic pumps)
- N Module:** DXMaN (power supply of external modules with no further function)
- R module:** DXMaR (controlling of chlorine gas metering units with position feedback processing)
- I module:** (processing of sensor signals above 4-20 mA)

The maximum main bus length is 16 inches!

ProMinent® DDC Analyzers

M Module (Measuring Module)

- A Stub cable
B Main BUS cable

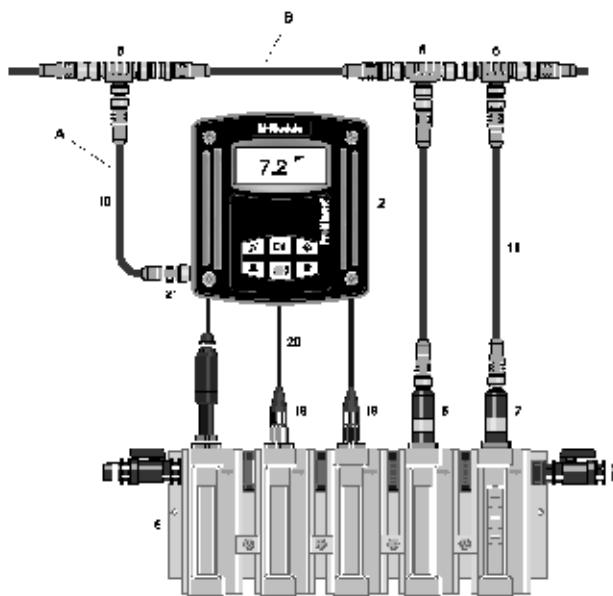

pk_5_042

The M module with its illuminated graphic display and keypad displays the measured values and allows all sensors for the corresponding filter circuit to be calibrated on site.

The following measurements can be taken:

- pH value
- ORP potential
- **free chlorine** and **total available chlorine** (optional or combined chlorine is (calculated) and **sample water temperature** using the **temperature probe in the chlorine sensor** or optionally using a separate **Pt100/Pt1000 resistance thermometer**

The M module has 3 digital inputs for:

- sample water monitoring
- controlling breaks in filter backwashing
- Parameter changeover for Eco!Mode
- The M module is connected to the other bus modules via the main bus cable, using the T-distributor supplied and the 0.5 m CAN connection cable.

The M module in the above example comprises the following components:


Item	Number	Name	Part No.
2	1	M module DXMa M W 0 S EN 01	DXMa M W 0 S DE 01
5	1	In-line probe housing DGMa 3 2 2 T 0 0 0	DGMa 3 2 2 T 0 0 0
6	1	Chlorine sensor CTE 1-CAN-10 ppm	1023427
7	1	Chlorine sensor CLE 3.1-CAN-10 ppm	1023426
8	3	T-distributors M12 5 pole CAN	included in delivery
10	1	Connecting cable - CAN M12 5 (pole) 0.5 m	included in delivery
11	2	Connection cable - CAN M12 5 (pole) 0.5 m	included in delivery
18	1	pH sensor PHES 112 SE	150702
		PHES 112 SE	150092
19	1	ORP sensor RHES-Pt-SE	150703
20	2	Cable combination coax 2m-SN6-pre-assembled*	1024106
21	2m	Signal lead, sold by the meter 2 x 0.25 mm ² Ø 4 mm	725122

* other lengths available

ProMinent® DDC Analyzers

I Module (Current Input Module)

- A Stub cable
B Main BUS cable

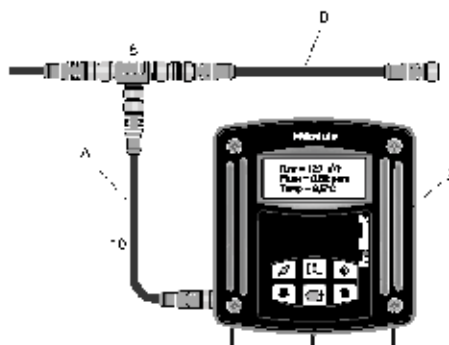

AP_DC_001_SW

The I module with its illuminated graphic display and keypad is a current input module capable of processing 3 standard signals from sensors and two digital signals.

It can be used together with the multi-channel controller DULCOMARIN® II in drinking water and swimming pool applications. All measured variables are available in the screenwriter and web and OPC®server.

Two analog inputs are provided as 2-wire inputs and one as passive input.

The inputs can process the following values as 4-20 mA standard signals:

- Turbidity
- Flow
- UV intensity
- Conductivity (via DMTa transducer)
- Chlorine dioxide*
- Chlorite
- Ammonia
- Fluoride
- Pt100 resistance thermometer via a transducer
- Dissolved oxygen
- Hydrogen peroxide *

The I module has 2 digital inputs for:

- sample water monitoring and
- pause control

The flow information can be used as an interference variable for the control of chlorine, pH correction and chlorine dioxide.

* these measured variables can also be controlled

The I module is connected to other bus modules via the main bus cable using the T-distributor and 0.5 m CAN connection cable supplied.


The I module in the above example consists of the following components:

Item	Number	Name	Part No.
2	1	I module DXMa I W 0 D EN 01	-
8	1	T-distributors M12 5P CAN	included in delivery
10	1	Connecting cable - CAN, M12, 5 (pole), 0.5 m	included in delivery

ProMinent® DDC Analyzers

Actuator Module

- A Stub cable
B Main BUS cable

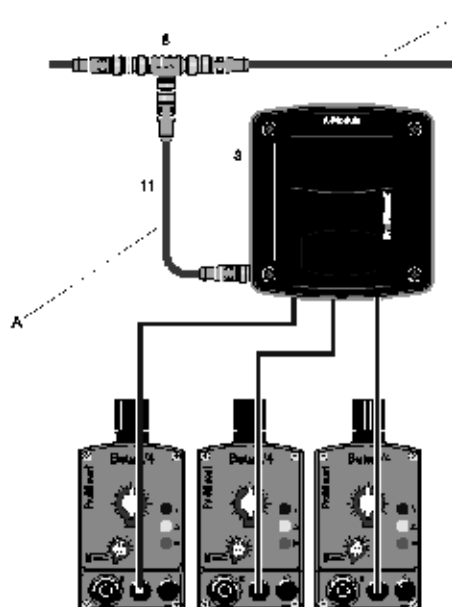

pk_5_043

The A module permits the control of up to three metering pumps via pulse frequency. Possible metering combinations are:

- pH lowering and disinfectant and flocculent or
- pH raising and disinfectant and flocculent or
- pH lowering and pH raising and disinfectant

It includes 3 digital inputs to evaluate the alarm relay of metering pumps, 4 freely programmable standard signal outputs 0/4-20 mA to document measured values, or as control outputs.

For this connection, the T-distributor and the CAN connecting cable 0.5 m include in the scope of delivery are used.

To be noted: If Beta®/4CANopen metering pumps are used, no A modules are required!

The A module in the above example consists of the following components (without metering equipment):

Item	Quantity	Designation	Order No.
3	1	A module DXMa A W 20 00 01	
8	1	T-distributor M12 5P CAN	included in delivery
11	1	Connecting cable - CAN M12 5 (pole) 1.5 ft. (0.5 m)	included in delivery


The A module is connected to other units via the main bus train.

For connection to units which are not electrically isolated (e.g. PLC), an isolating amplifier, e.g. order no. 1033536, is required!

ProMinent® DDC Analyzers

The Combination Module

Actuator module with power supply:

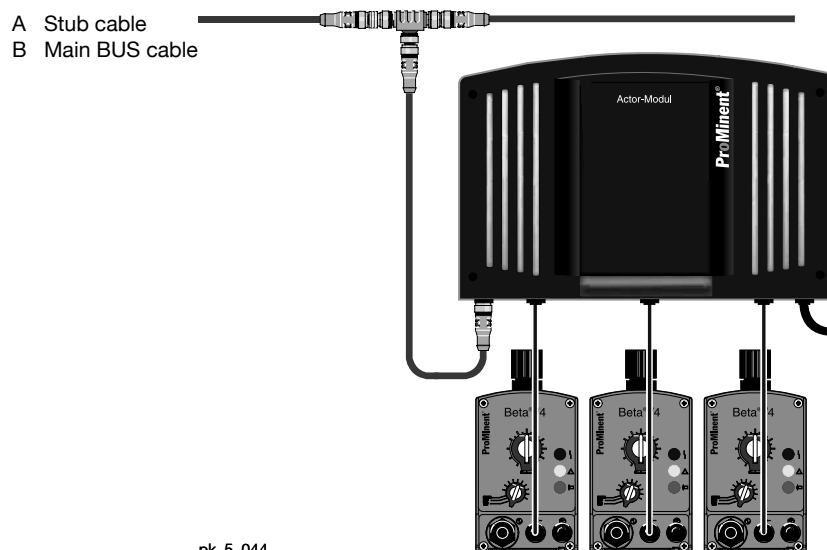

pk_5_044

Combination A module and P module

Up to three different modules can be connected to the combination module (DXCa without controls). The function of the combination module is based on the function of the individual modules (see description above). The modules in the combination module are operated via the DXCa central unit.

The module is connected to the other bus modules via the main bus cable using the T-distributor supplied and the 0.5 m CAN connection cable.

See the table below for the various fitting options:

Module position 1	Module position 2	Module position 3
M module	M module	P module
M module	M module	N module
A module	A module	P module
A module	A module	N module
M module	A module	P module
M module	A module	N module


The combination in the above example consists of the following components (without chemical fluid handling):

Item	Number	Name	Order No.
3	1	Control module DXCa W 2 0 0 0 A P S 00 01	
8	1	T-distributor M12 5 pole CAN	included in delivery
11	1	Connecting cable - CAN M12 5 pole 1.5 ft. (0.5 m)	included in delivery

ProMinent® DDC Analyzers

N Module (Power Supply Module)

- A Stub cable
B Main BUS cable

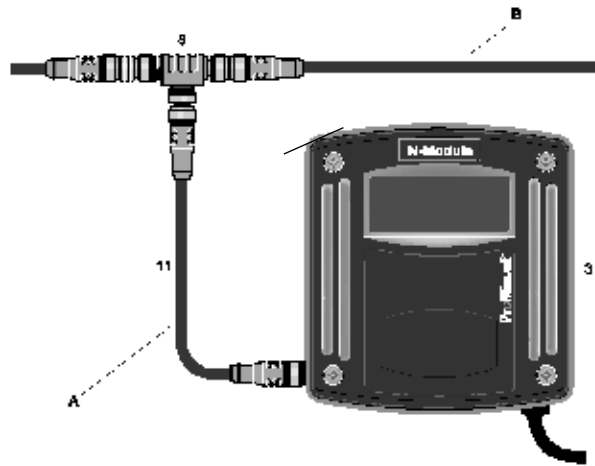

pk_5_043_C_power

The N module (power supply) is used to supply the bus modules with power and has no further function.

The number of N modules required can be seen from the table below. If P modules are used in a system, the number of N modules is reduced accordingly. The central unit always includes a power supply unit (N or P module).

How many additional N or P modules do you require?

Number filtration circuits	Additional N or P modules	Number filtration circuits	Additional N or P modules
1	-	9	4
2	-	10	5
3	1	11	5
4	2	12	6
5	2	13	6
6	3	14	7
7	3	15	7
8	4	16	8

The N module requires power supply for operation and is connected to the other bus modules via the main bus train. For this connection, the T-distributor and the CAN connecting cable 0.5 m included in the scope of delivery are used.

The power module in the above example comprises the following components:


Item	Number	Designation	Part No.
3	1	Power-module DXMa N W 2 0 00 01	
8	1	T-distributor M12 5 Pol. CAN	included in delivery
11	1	Connecting cable - CAN M12 5 (pole) 1.5 ft. (0.5 m)	included in delivery

If you have any questions, please contact our sales department.

ProMinent® DDC Analyzers

R Module (Control Module For Chlorine Gas Metering Units)

- A Stub cable
B Main BUS cable

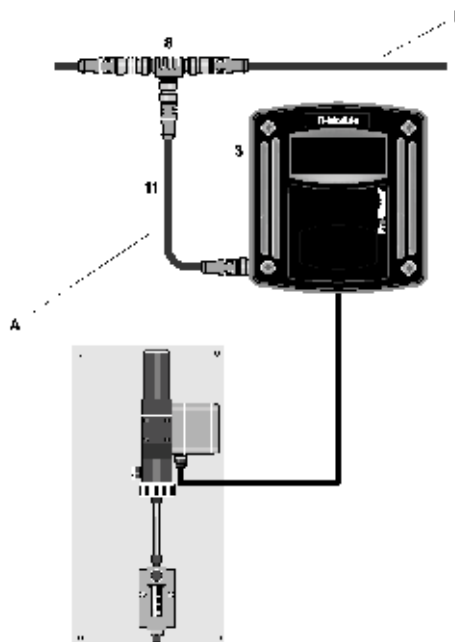

pk_5_043_C_power

The R module permits the control of chlorine gas metering units which are equipped with a position feedback potentiometer.

It includes 2 power relays for opening and closing and an input for a position feedback potentiometer 1-10 kΩ.

The R module is connected to other units via the main bus train.

For this connection, the T-distributor and the CAN connecting cable 0.5 m included in the scope of delivery are used.


The R module in the above example consists the following components (without chlorine gas metering unit):

Item	Number	Designation	Part No.
3	1	R module DXMa R W 2 0 0 0 01	
8	1	T-distributor M12 5 P CAN	included in delivery
11	1	Connecting cable - CAN, M12, 5 (pole) 1.5 ft. (0.5 m)	included in delivery

If you have any questions, please contact our sales department.

ProMinent® DDC Analyzers

G Module (Limit Value and Alarm Module)

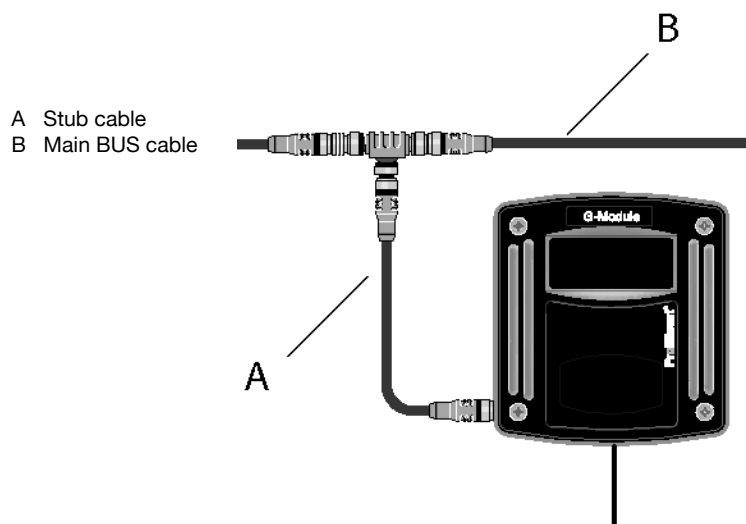

P_DM_0024_SW3

The G module is a limit value and alarm emitting module with 2 potential-free changeover relays to signal alarm states. Each of the two relays has ten different setting options to monitor measured values for minimum and maximum values and, should the values exceed or fall below these limits, this then effects the relay. Both relays have the same setting options, thereby enabling for pre-warnings or shutdowns to be generated by the use of different delay periods.

The G module is connected to the other units via the main bus cable using the T-distributor and 0.5m CAN connection cable supplied.

The G module in the above example consists the following components:

Item	Number	Designation	Order No.
3	1	G module DXMa R W 2 0 0 0 01	
8	1	T-distributor M12 5 pin CAN	included in delivery
11	1	Connecting cable - CAN, M12, 5 pin 1.5 ft. (0.5 m)	included in delivery

If you have any questions, please contact our sales department.

ProMinent® DDC Analyzers

Identcode Ordering System CANopen Modules

Measurement Module for DULCOMARIN® II Series DXM

DXMa	Module:					
	M	M module, measuring module: pH, ORP, temperature				
	A	A module, control module: 3 pump and 4 analog outputs				
	R	R module, control module: chlorine gas metering unit with feedback				
	N	N module, mains power module without relay				
	P	P module, mains power module with relay, only mounting type "O"				
	I	I module, current input module, 3 mA inputs, 2 digital inputs				
	G	G module				
	Installation:					
	0	No housing, only P module (IP 00)				
	W	Wall mounting (IP 65)				
	E	Retrofit module (installation module for DXCa, IP 20)				
	Version:					
	0	With controls (only M module, mounting type W)				
	2	Without controls				
	3	Without controls (only mounting type "E" and "H")				
	Application:					
	0	Standard				
	S	Swimming pool (only M module)				
	D	Drinking water/disinfection (only I module)				
	Language default:					
	EN	English				
	Approvals:					
	00	No approval, only P module without housing				
	01	CE mark				
DXMa	M	0	0	0	EN	0

Please note the following:

Upgrade modules for existing systems require a software update for the existing system. A Software Update Kit is needed to avoid any possible incompatibility between the different modules.

The update kit is free of charge and one is also needed when ordering more than one upgrade module. The kit includes a SD memory card with the current software for the DULCOMARIN II and a description about how to perform the software update.

Order No.

Update kit/DXC and modules

1031284

ProMinent® DDC Analyzers

Spare parts and upgrade sets

Internal spare parts and upgrade sets for the DULCOMARIN® II cannot be ordered using the part number printed on the modules!

Modules have to be fully replaced (the exception to this is the N module).

The electrical unit for the central unit can only be replaced by a complete processor spare part.

Please use only the following identcodes when ordering identcodes:

Replacement central units

Replacement central unit: DXCAC001000#DE01 (without communications interface, # = please state "S" for applications in swimming pools and "D" for applications relating to drinking water).

Replacement central unit: DXCAC051000#DE01 (with web server, # = please state "S" for applications in swimming pools and "D" for applications relating to drinking water).

Replacement central unit: DXCAC061000#DE01 (with OPC and web server, # = please state "S" for applications in swimming pools and "D" for applications relating to drinking water).

External modules (replacement or upgrade modules):


- M module: DXMa M W 0 S EN 01 (with display)
- A module: DXMa AW2 0 00 01 (without display)
- N module: DXMa N W 2 0 00 01 (without display)
- R module: DXMa R W2 0 00 01 (without display)
- G module: DXMa G W2 0 00 01 (without display)
- P module: DXCa W 2 00 00 PS 00 01 (without display in large DXC housing)
- I module: DXMa I W 0 D D E 01 (with display)
- I module: DXMa I W 2 D 0 0 0 1 (without display)

Internal modules (replacement or upgrade modules):

- M M module: DXMa M E3S 00 01
- M A module: DXMa A E30 00 01
- M P module: DXMa P03 00 00
- M I module: DXMa I E 3 D 00 01
- M N module: Order no. 732485, electrical set DXMaN 24 V/1A

ProMinent® DDC Analyzers

Diaphragm Metering pumps compatible with CANopen bus

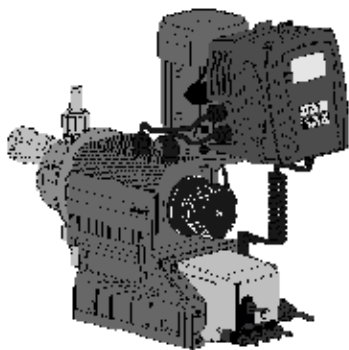

CANopen bus interface for DULCOMARIN® II

Feed rate range 0.19-9 gph (0.74-34 l/h), 29-232 psi (2-16 bar)

Stroke length continuously adjustable between 0-100% (recommended 30-100%)

Transmission of the stroke length setting from DULCOMARIN II

Material versions PP, plexiglass/PVC

Patented coarse / fine bleed valve for PP and plexiglass/PVC

Self-bleeding liquid end version in PP and plexiglass/PVC


Port for 2-phase level switch

Version for extra-low voltage 12/24 V DC, 24 V AC

4 LED display for operation, warning and error messages

Alarm for stroke length changes $> \pm 10\%$

Transmission of level alarm without alarm relay via the bus



ProMinent® DDC Analyzers

Complete System

Number and type of modules required for a given number of pools

Number filtration circuits	Central unit DXCa	P module	M module	A module	Additional N or P module (power supply)	Sensor free chlorine unit)	Sensor total chlorine - (optional)
1	1	1	1	1	-	1	1
2	1	1	2	2	-	2	2
3	1	1	3	3	1	3	3
4	1	1	4	4	2	4	4
5	1	1	5	5	2	5	5
6	1	1	6	6	3	6	6
7	1	1	7	7	3	7	7
8	1	1	8	8	4	8	8
9	1	1	9	9	4	9	9
10	1	1	10	10	5	10	10
11	1	1	11	11	5	11	11
12	1	1	12	12	6	12	12
13	1	1	13	13	6	13	13
14	1	1	14	14	7	14	14
15	1	1	15	15	7	15	15
16	1	1	16	16	8	16	16

* No A module if metering pumps with CANopen are used.

The above modules include all CAN bus connecting elements (T-distributor and spur line).

The T-distributors can also be directly coupled.

For distributed systems, CAN cable must be ordered by the meter with the by the meter connecting kit.

Order no.

CAN (by the meter) - connection kit*	1026589
Connecting cable - CAN (by the meter)*	1022160

* The CAN by-the-meter connecting kit consists of a CAN coupling M12 5P and a CAN connector M12 5P and a wiring diagram.

The by-the-meter connecting cable can be configured into a cable of individual length using the CAN by-the-meter connecting kit.

One CAN by-the-meter connecting kit is required for each cable to be configured.

The connecting cables CAN M12 5P 0.5m ?(pump 1 m) supplied with the sensors and modules must be used for the spur lines.

If you have any questions, please contact our sales department.


Caution:

The maximum main bus length (not including stubs) may be 400 m at the most.

ProMinent® DDC Analyzers

Complete System

Example of configuration for two control systems:

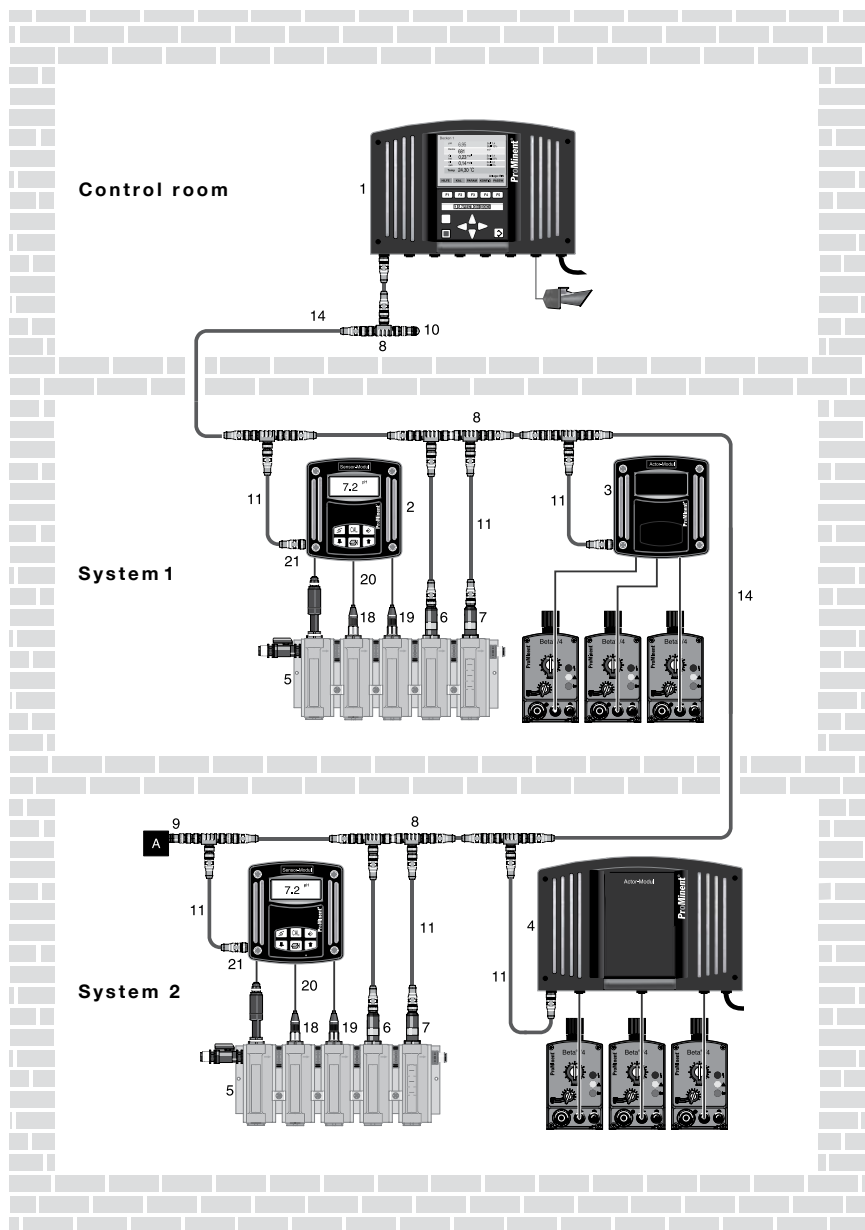

pk_5_022

ProMinent® Portable DT Photometer

Overview: Photometer


Photometer DT1, DT2, DT3 and DT4

- Portable compact Photometer
- Simple to operate with support text
- Reliable, simple measurement of chlorine, chlorine dioxide, fluoride, chlorite, H₂O₂, bromine, ozone, pH and cyanuric acid
- Self-diagnostic

Applications:

swimming pool, drinking water, process water

Technical Data

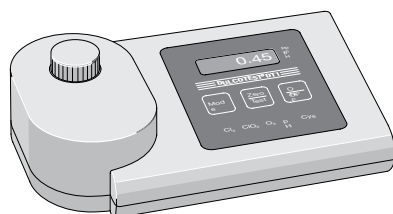

pk_5_021

Measurement range of DT1:	0.05...6.0 mg/l free chlorine (DPD 1) + total chlorine (DPD3) 0.1...13.0 mg/l bromine (DPD 1) 0.05...11 mg/l chlorine dioxide (DPD 1) 0.03...4.0 mg/l ozone (DPD 4) pH 6.5...8.4 (phenol red) 1...80 mg/l cyanuric acid
Measurement range of DT2B:	0.05...2.0 mg/l fluoride 0.05...6.0 mg/l free chlorine and total chlorine 0.05...11.0 mg/l chlorine dioxide
Measurement ranges, DT3:	1 - 50 / 40 - 500 mg/l hydrogen peroxide
Measurement ranges, DT4:	0.03 - 2.5 mg/l chlorite, 0.05 - 11 mg/l chlorine dioxide, 0.05 - 6 mg/l chlorine
Measuring tolerance:	Dependent upon measured value and measuring method
Battery:	9 V battery (approx. 600 x 4-minute measurement cycles)
Ambient temperature:	41 - 104° F (5 - 40 °C)
Relative humidity:	30 - 90 % (non-condensing)
Housing material:	ABS
Keypad:	Polycarbonate
Dimensions:	7.5 x 4.3 x 2.2 in (190 x 110 x 55 mm (LxWxH))
Weight:	approx. 1 lb. (0.4 kg)

	Part No.
Type DT1 photometer , complete with carrying case	1003473
Type DT2B photometer , complete with carrying case	1010394
Type DT3 photometer , complete with carrying case	1023143
Type DT4B photometer , complete with carrying case	1039318

Photometers supplied with accessories, container vessels and reagents.

Consumable items:	Part No.
DPD 1 buffer, 15 ml	1002857
DPD 1 reagent, 15 ml	1002858
DPD 3 solution, 15 ml	1002859
Phenol red tablets R 175 (100 in each)	305532
Cyanuric acid tablets R 263 (100 in each)	305531
SPADNS reagent, 250 ml for fluoride detection	1010381
Calibration standard fluoride 1 mg/l for calibration of photometer (fluoride detection)	1010382
3 spare cells: round cells with covers for DPD phenol red and cyanuric acid detection (DT1 and DT2B)	1007566
3 spare cells for fluoride detection (DT2A and B)	1010396
DPD reagents set, 15 ml each: 3 x DPD 1 buffer, 1 x DPD 1 reagent, 2 x DPD 3 solution	1007567
Chlorine dioxide tablets Nr. 1 R 127	501317
Chlorine dioxide tablets Nr. 2 R 128	501318

Spare parts

Chlorite meter:

Foamer for expulsion of chlorine dioxide (DT4)	1022754
3 No. spare cuvettes for chlorite determination	1007566

H₂O₂ meter:

Reagent for H ₂ O ₂ (DT3), 15 ml	1023636
Spare cuvettes, 5 No., for H ₂ O ₂ (DT3)	1024072

ProMinent® Cooling Tower & Boiler Controllers

MicroFLEX Controllers



ProMinent's microFLEX controller is the perfect economical solution that provides the latest in water management technology for Cooling Towers and Boilers. The microFLEX water treatment controller offers a worry-free thermal flow switch that does not require any user adjustments. It also integrates built-in diagnostics with real-time monitoring in a compact design (5.9"W x 5.9"H x 3.5"D).

Features

- **Models:** Boiler, Cooling, Condensate diverter, Closed loop – reverse conductivity
- **Inhibitor Modes:** Bleed & Feed, Bleed then Feed, Percent Time, Meter Volume
- **Inputs:** Conductivity, Meter, System status
- **Outputs:** Two Powered Relays
- **Standard:** Single point calibration, 2 Line – 16 Character LCD, Built-In Diagnostics NEMA 4X Enclosure, CE Approved, 5 Key Universal Keypad
- **Options:** Web Browser Interface for remote view and configuration or Dry contact alarm or 4-20mA out on conductivity

Identcode Ordering System

M02	Series Version:				
	A	MicroFLEX 2 Controller Version A: Two relay controller with conductivity and temperature inputs, single inhibitor feed based on water meter input, bleed or % time with overfeed protection, flow switch/status input, 2 line display and 5 key universal keypad.			
		Application:			
		COIN	Cooling Tower		
		BBIN	Boiler		
		CLAH	Closed loop reverse conductivity		
		CMAH	Condensate monitor		
		Expansion Option:			
		XX	None		
		CL	4-20 mA output on conductivity		
		LB	Ethernet networking		
AR	Dry contact alarm relay				
Remote communications:					
	0	None			
Approvals:					
		01	Standard		
M02	A	COIN	XX	0	01

ProMinent® Cooling Tower & Boiler Controllers

MultiFLEX Controllers



ProMinent's MultiFLEX water treatment controllers exemplify the latest in water management technology. Packed with features, the MultiFLEX line of products are designed to provide the highest degree of control and flexibility. With one MultiFLEX you can control and monitor multiple towers, multiple boilers, or tower/boiler combos.

Features

- Control up to 4 Towers at once
- Control up to 8 Boilers at once
- Web Browser Accessible
- LAN Accessible
- Up to 14 Analog Inputs
- Twelve Digital Inputs
- Ten Relay Outputs
- Works with Trackster 3 Software
- 5-Key Universal Keypad
- 4 Line, 20 Character Backlit Display
- Easily Upgraded with Plug-in Modules
- Fully Programmable
- Ethernet with user definable static IP address
- NEMA 4X Enclosure
- 120 or 240VAC 50/60Hz, Switch Selectable
- CE Approved
- Supports "Percentage Time Bleed & Feed" ■

ProMinent® Cooling Tower & Boiler Controllers

Identcode Ordering System (M5)

M05	Series Version:													
A	MultiFLEX 5 Controller Version A: Includes 5 universally controlled powered (120/240VAC) relays, 6 status/water meter digital inputs, 7 analog input/output channels, a 4 line 20 character back lit display, 5 key universal keypad and an Ethernet port with Browser communications. Can be programmed for cooling, boiler, process or mixture of all on one unit.													
Application:														
B	Boiler													
T	Tower, combination, or monitor													
X	Custom application with factory configuration													
I/O Expansion Slot 'A' and 'B'. (*options marked are tower only):														
XX	None				RR*	Dual ORP - Relay								
B1	Single Boiler Conductivity with Blowdown Relay				O2*	Dual ORP - Monitor								
BM	Single Boiler Conductivity - Monitor				OP*	ORP and pH - Relay								
B2	Dual Boiler Conductivity with Blowdown Relay				MM*	ORP and pH - Monitor								
BB	Dual Boiler Conductivity - Monitor				CR*	Single corrosion rate								
CC	Boiler Condensate Conductivity/Temp - Relay				DC*	Dual corrosion rate								
CN	Boiler Condensate Conductivity/Temp - Monitor				CI	Single 4-20 mA Input - Relay								
PC	Single Boiler Condensate pH - Relay				IM	Single 4-20 mA Input - Monitor								
PN	Single Boiler Condensate pH - Monitor				2I	Dual 4-20 mA Input 1 relay								
CO*	Cooling Tower Conductivity/Temp - Relay				I2	Dual 4-20 mA Input 2 relays								
CM*	Cooling Tower Conductivity/Temp - Monitor				2M	Dual 4-20 mA Input Monitor								
PH*	Single Cooling Tower pH - Relay				I1	Dual 4-20 mA Input (isolated) 1 relay								
PM*	Single Cooling Tower pH - Monitor				I3	Dual 4-20 mA Input (isolated) 2 relays								
PP*	Dual Cooling Tower pH - Relay				I4	Dual 4-20 mA Input (isolated) Monitor								
P2*	Dual Cooling Tower pH - Monitor				IO	Single 4-20 mA Output								
PT*	Single pH/Temp (Temperature compensated pH)				OO	Dual 4-20 mA Output								
OR*	Single ORP - Relay				RS	Rate to Stroke driver								
OM*	Single ORP - Monitor				CS	Conduct continuous sample monitor								
I/O Expansion Slot 'C' and 'D':														
XX	Use same selection options as expansion slot 'A' and 'B'													
I/O Expansion Slot 'E' and 'F':														
XX	Use same selection options as expansion slot 'A' and 'B'													
I/O Expansion Slot 'G':														
XX	Same choices as Slot A/B except only single expansion card options allowed													
Pre-wired power relay plug box:														
0	None		3	Three outlets										
1	One outlet		4	Four outlets										
2	Two outlets		5	Five outlets										
Inhibitor powered relays (tower only):														
0	None		3	Three										
1	One		4	Four										
2	Two													
Timed biocide powered relays:														
0	None		3	Three										
1	One		4	Four										
2	Two													
Internal boiler treatment:														
0	None		5	Five										
1	One		6	Six										
2	Two		7	Seven										
3	Three		8	Eight										
4	Four													
Remote communications:														
0	None													
P	Phone modem communications with data logging													
Feed verifications:														
0	None		3	Feed verification (3)										
1	Feed verification (1)		4	Feed verification (4)										
2	Feed verification (2)													
Operating Voltage:														
A	115 VAC 50/60 Hz													
B	230 VAC 50/60 Hz													
M05	A	B	XX	XX	XX	XX	0	0	0	0	0	0	0	A

ProMinent® Cooling Tower & Boiler Controllers

Identcode Ordering System (M10)

M10	Series Version:															
A	MultiFLEX 10 Controller Version A: Includes 10 universally controlled powered (120/240VAC) relays, 12 status/water meter digital inputs, 14 analog input/output channels, 4 line 20 character backlit display, 5 key universal keypad and an Ethernet port with Browser communications. Can be programmed for cooling, boiler, process or a mixture of all on one unit.															
	Application:															
B	Boiler															
T	Tower, combination, or monitor															
X	Custom application with factory configuration															
I/O Expansion Slot 'A' and 'B'. (*options marked are tower only):																
XX	None				RR*	Dual ORP - Relay										
B1	Single Boiler Conductivity with Blowdown Relay				O2*	Dual ORP - Monitor										
BM	Single Boiler Conductivity - Monitor				OP*	ORP and pH - Relay										
B2	Dual Boiler Conductivity with Blowdown Relay				MM*	ORP and pH - Monitor										
BB	Dual Boiler Conductivity - Monitor				CR*	Single corrosion rate										
CC	Boiler Condensate Conductivity/Temp - Relay				DC*	Dual corrosion rate										
CN	Boiler Condensate Conductivity/Temp - Monitor				CI	Single 4-20 mA Input - Relay										
PC	Single Boiler Condensate pH - Relay				IM	Single 4-20 mA Input - Monitor										
PN	Single Boiler Condensate pH - Monitor				2I	Dual 4-20 mA Input 1 relay										
CO*	Cooling Tower Conductivity/Temp - Relay				I2	Dual 4-20 mA Input 2 relays										
CM*	Cooling Tower Conductivity/Temp - Monitor				2M	Dual 4-20 mA Input Monitor										
PH*	Single Cooling Tower pH - Relay				I1	Dual 4-20 mA Input (isolated) 1 relay										
PM*	Single Cooling Tower pH - Monitor				I3	Dual 4-20 mA Input (isolated) 2 relays										
PP*	Dual Cooling Tower pH - Relay				I4	Dual 4-20 mA Input (isolated) Monitor										
P2*	Dual Cooling Tower pH - Monitor				IO	Single 4-20 mA Output										
PT*	Single pH/Temp (Temperature compensated pH)				OO	Dual 4-20 mA Output										
OR*	Single ORP - Relay				RS	Rate to Stroke driver										
OM*	Single ORP - Monitor															
I/O Expansion Slot 'C' and 'D':																
XX	Use same selection options as expansion slot 'A' and 'B'															
I/O Expansion Slot 'E' and 'F':																
XX	Use same selection options as expansion slot 'A' and 'B'															
I/O Expansion Slot 'G' and 'H':																
XX	Use same selection as expansion slot 'A' and 'B'															
I/O Expansion Slot 'I' and 'J':																
XX	Use same selection options as expansion slot 'A' and 'B'															
I/O Expansion Slot 'K' and 'L':																
XX	Use same selection options as expansion slot 'A' and 'B'															
I/O Expansion Slot 'M' and 'N':																
XX	Use same selection options as expansion slot 'A' and 'B'															
Pre-wired power relay plug box:																
0	None				6	Six outlets										
1	One outlet				7	Seven outlets										
2	Two outlets				8	Eight outlets										
3	Three outlets				9	Nine outlets										
4	Four outlets				A	Ten outlets										
5	Five outlets															
Inhibitor powered relays (tower only):																
0	None				3*	Three										
1*	One				4*	Four										
2*	Two															
Timed biocide powered relays:																
0	None				3	Three										
1	One				4	Four										
2	Two															
Internal boiler treatment:																
0	None				5	Five										
1	One				6	Six										
2	Two				7	Seven										
3	Three				8	Eight										
4	Four															
Remote communications:																
0	None															
P	Phone modem communications with data logging															
Feed verifications:																
0	None															
1	Feed verification (1)															
2	Feed verification (2)															
3	Feed verification (3)															
4	Feed verification (4)															
Operating Voltage:																
A	115 VAC 50/60 Hz															
B	230 VAC 50/60 Hz															
M10	A	B	XX	XX	XX	XX	XX	XX	XX	0	0	0	0	0	0	A

ProMinent® Cooling Tower & Boiler Controllers

AEGIS Controllers



ProMinent's AEGIS controller provides the latest in technology and is the perfect economical solution for process, cooling, boiler and waste water treatment applications.

Features

- Inhibitor Feed Using PPM Setpoints
- Volumetric Timer Controls
- Relay Mirroring
- Ethernet Communications
- Optional MODBUS
- Industrial and Commercial Series
- Plug and Play Upgrades
- Works with Trackster 3 Software
- Aquatrac Thermal Flow Switch
- Easily Upgradeable with Plug-in Modules
- Program Chemical Feed
- CE Approved
- NEMA 4X Enclosure
- Variable Frequency Pump Controls
- Data Logging
- Drum Level Alarms
- ProMinent Pump integration

Advantages & Benefits

Variable Frequency Pump Controls: Accurate and precise chemical feed using pulse outputs. Can also select On/Off control if desired.

Data Logging: Data history provides sensor minimum, maximum and average. Also records pump run times, pump feed volume, calculated drum levels, water meter volume, tower run time.

Aquatrac Exclusive Thermal Flow Switch: Aquatrac's exclusive design does not require user adjustment or calibration. Operates on 1GPM flow rate with no moving parts.

ProMinent Pump Integration: Select from popular ProMinent pump models built into the Aegis programming for accurate ppm feed, tank level and feed volume.

Feed Inhibitor using ppm setpoints: Accurate and precise inhibitor feed by simply inputting desired ppm level based on inhibitor chemistry. Use with make-up water meter.

Plug and Play Onsite Upgrades: The Aegis features Plug and Play technology allowing the user to perform simple onsite upgrades and scalability.

Program chemical feed based on drop tests: Program chemical feed by entering results of system testing using ppm, ml or drop tests. Enter the new value and desired alarm setpoints for worry-free chemical feed and control.

Drum Level Alarms: Provide low level alarms without the use of level sensors. The Aegis calculates volume fed and subtracts from tank inventory.

Communications: Ethernet, MODBUS

ProMinent® Cooling Tower & Boiler Controllers

Identcode Ordering System AEGIS

AGIA Series Version:																
A	Browser command & control with live views via 10 Base T TCP-IP Ethernet LAN port. User reconfigurable I/O including 8 universal digital inputs for water meter or contact sets, 5 ON/OFF powered relays for pump and valve control and 4 variable frequency pulse pump speed controls. Standard unit includes conductivity, temperature and 4-20 mA inputs. Sensors not included.															
	Base (built-in) conductivity, Inputs 'A' and 'B':															
	0	None														
	1	CTF Cooling tower conductivity-temperature-flow switch input (with Blowdown relay)														
	2	Cooling tower conductivity-temperature input (with Blowdown relay)														
	3	Boiler conductivity sensor input (with Blowdown relay)														
	4	Condensate conductivity-temperature input (with Blowdown relay)														
	5	Conductivity continuous sample monitor														
	Expansion Slot #1, Inputs 'C' and 'D':															
	XX	None										OM	Single ORP - Monitor			
	B1	Single boiler conductivity with blowdown relay										RR	Dual ORP - Control			
	BM	Single boiler conductivity - monitor										OR	Dual ORP - Monitor			
	B2	Dual boiler conductivity with blowdown relay										OP	ORP and pH - Control			
	BB	Dual boiler conductivity - monitor										MM	ORP and pH - Monitor			
	CC	Boiler condensate conductivity/temp - relay										CR	Single Corrosion Rate			
	CN	Boiler condensate conductivity/temp - monitor										DC	Dual Corrosion Rate			
	PC	Single boiler condensate pH - control										CI	Single 4-20 mA input - Control			
	PN	Single boiler condensate pH - monitor										IM	Single 4-20 mA input - Monitor			
	CO	Cooling tower conductivity/temp - relay										2I	Dual 4-20 mA input 1 Control			
	CM	Cooling tower conductivity/temp - monitor										2M	Dual 4-20 mA input 2 Control			
	PH	Single cooling tower pH - control										I1	Dual 4-20 mA input (isolated) 1 Control			
	PM	Single cooling tower pH - monitor										I3	Dual 4-20 mA input (isolated) 2 Control			
	PP	Dual cooling tower pH - control										I4	Dual 4-20 mA input (isolated) Monitor			
	P2	Dual Cooling Tower pH - Monitor										IO	Single 4-20 mA output			
	PT	Single pH/Temp (temperature compensated pH)										OO	Dual 4-20 mA output			
	OR	Single ORP - Control														
	Expansion Slot #2, Inputs 'E' and 'F':															
	XX	None										OR	Single ORP - Control			
	B1	Single Boiler Conductivity with Blowdown Relay										OM	Single ORP - Monitor			
	BM	Single Boiler Conductivity - Monitor										RR	Dual ORP - Control			
	B2	Dual Boiler Conductivity with Blowdown Relay										O2	Dual ORP - Monitor			
	BB	Dual Boiler Conductivity - Monitor										OP	ORP and pH - Control			
	CC	Boiler Condensate Conductivity/Temp - Relay										MM	ORP and pH - Monitor			
	CN	Boiler Condensate Conductivity/Temp - Monitor										CR	Single Corrosion Rate			
	PC	Single Boiler Condensate pH - Control										DC	Dual Corrosion Rate			
	PN	Single Boiler Condensate pH - Monitor										CI	Single 4-20 mA input - Control			
	CO	Cooling Tower Conductivity/Temp - Relay										IM	Single 4-20 mA input - Monitor			
	CM	Cooling Tower Conductivity/Temp - Monitor										2I	Dual 4-20 mA input 1 Control			
	PH	Single Cooling Tower pH - Control										I2	Dual 4-20 mA input 2 Control			
	PM	Single Cooling Tower pH - Monitor										2M	Dual 4-20 mA input Monitor			
	PP	Dual Cooling Tower pH - Control										IO	Single 4-20 mA output			
	P2	Dual Cooling Tower pH - Monitor										OO	Dual 4-20 mA output			
	PT	Single pH/Temp (temperature compensated pH)														
	4-20 mA input, Input 'G':															
	0	Standard feature. Input can be used for any 4-20 mA input single (See sensor list for loop powered toroidal choices)														
	1	Torroidal Conductivity														
	Pump Output Type (includes 1 powered relay for blowdown):															
	P	Powered (120/240VDC) relays (4 max)														
	V	Variable frequency pulse out (4 max)														
	X	Combination of P and V (must select X for factory configuration)														
	Factory configuration (assign inputs/outputs, etc.):															
	0	None														
	T	Cooling tower - factory configuration														
	B	Boiler - factory configuration														
	X	Factory configuration (must supply worksheet)														
	C	Cooling tower trim feed														
	Pre-wired power relay plug cables:															
	0	None	3	Three												
	1	One	4	Four												
	2	Two	5	Five												
	Pre-wired power relay plug box:															
	0	None	3	Three outlets												
	1	One outlet	4	Four outlets												
	2	Two outlets	5	Five outlets												
	Inhibitor on/off outputs (tower only)															
	0	None														
	1	One														
	2	Two														
	Timed biocide on/off outputs:															
	0	None	2	Two												
	1	One	3	Three												
	Internal boiler treatment on/off outputs															
	0	None	3	Three												
	1	One	4	Four												
	2	Two	5	Five												
	Enclosure Option:															
	0	Standard enclosure 7.5"W x 11.3"H														
	S	Standard enclosure with mains switch														
	E	Extra large enclosure 16"W x 14"H														
	F	Extra large enclosure 16"W x 14"H w/ mains switch														
	Remote communications:															
	0	Standard option; Ethernet port														
	M	Modbus														
	R	Alarm Relay														
	N	Modbus + Alarm Relay														
	Operating Voltage:															
	0	115 VAC 50/60 Hz														
	1	230 VAC 50/60 Hz														
	Approvals (Internal only):															
	01	Standard														

AGIA	A	0	XX	XX	0	P	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
------	---	---	----	----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

ProMinent® Cooling Tower & Boiler Controllers

Cooling Tower and Boiler Accessories

Analog Sensors	Controller	
	Choice	Part No.
ORP Sensor Package - Chlorination with cable, Tee and probe holder	B,C, D	7760768
ORP Electrode, flat faced double junction 100 psi @175°F - cable required PN 1036595	B,C,D	7761399
PHED Sensor Package with cable, Tee and probe holder	B,C,D	7760729
pH Electrode, flat faced double junction 100 psi @ 175°F - cable required PN 1036595	B,C,D	7760998
Conductivity/Temperature Electrode 125 psi @125°F with Tee - Cooling applications	B,C,D	7760200
Aquatrac Conductivity/Temperature/Thermal Flow Switch CTF (Cooling)	A,B,D	7760021
Corrosion Rate Electrode, Admiralty	C,D	7760748
Corrosion Rate Electrode, Carbon Steel	C,D	7760746
Corrosion Rate Electrode, Copper	C,D	7760747
Corrosion Rate Electrode, Cupro-Nickle	C,D	7760750
Corrosion Rate Electrode, Stainless Steel	C,D	7760749
Corrosion Rate Electrode, Zinc	C,D	7760745
Aquatrac Thermal Flow Switch 100psi @125°F	A,B,C,D	7760175
Conductivity Electrode 3/4" NPT 250psi steam max (Boiler - standard sensor)	A,C,D	7760002
Conductivity/Temperature Electrode 250psi steam max 3/4" NPT 4 wire (Condensate)	A,C,D	7760191
pH Electrode, 1/2" NPT SS, 230°F max (Condensate)	B,C,D	7760465
High Pressure Flow Switch 1.5GPM, 400 psi max 3/4" NPT , Bronze	A,B,C,D	7760203
Water Meters		
3/4" Contacting head water meter, 1GPC, 3/4" FNPT	B,C,D	7760518
1" Contacting head water meter, 10GPC, 1" FNPT	B,C,D	7760515
1 1/2" Contacting head water meter, 100 GPC, 1" FNPT	B,C,D	7760516
2" Contacting head watermeter 100GPC, 2"FNPT	B,C,D	7760517
3/4in Paddlewheel Water Meter Sensor. Supplied in PVC pipe section.	B,C,D	7760514
1in Paddlewheel Water Meter Sensor. Supplied in PVC pipe section.	B,C,D	7760508
1.5" Paddlewheel Water Meter Sensor. Supplied in PVC pipe section.	B,C,D	7760509
2" Paddlewheel Water Meter Sensor. Supplied in PVC pipe section.	B,C,D	7760510
3" Paddlewheel Water Meter Sensor. Supplied in PVC pipe section.	B,C,D	7760511
4" Paddlewheel Water Meter Sensor. Supplied in PVC pipe section.	B,C,D	7760512
Solenoids and Valves		
1/2" Solenoid valve for cooling application. 150 psi max	A,B,C,D	7760212
3/4" Solenoid valve for cooling application. 150 psi max	A,B,C,D	7760213
1" Solenoid valve for cooling application. 150 psi max	A,B,C,D	7760214
Needle valve 1/2", rated 250 psi steam, color coded shaft, numbered handle	A,B,C,D	7760006
Orifice Union, 1/2" NPT, 250 psi steam, with four orifice plates	A,B,C,D	7760109
Motorized blowdown valve 1/2"NPT, 120VAC, 250psi steam	A,B,D	7760217
Motorized blowdown valve 3/4"NPT, 120VAC, 250psi steam	A,B,D	7760218
Motorized blowdown assembly, 1/2"NPT, 120VAC 250psi steam w/needle valve and T	A,B,D	7760013

A - microFLEX B - SlimFlex C - multiFLEX D - AEGIS

ProMinent® Cooling Tower & Boiler Controllers


ProMtrac Controller

Cooling Tower controller with intuitive rotary interface provides simple menu navigation while offering flexibility and reliable control. The Start Up Wizard makes programming fast and easy. Comprehensive, pre-configured programming is also available at no additional cost using the latest innovation, Plug & Feed.

Advantages & Benefits



- LED Alarm status indicator
- Rotary interface with menu selectable push button keys
- Start Up Wizard for fast and easy programming
- Data logging with USB drive
- Browser command & control
- 4 Analog inputs with flexible offering:
 - 2 Conductivity inputs for cycle control
 - 1 pH or ORP input
 - 1 Fluorometer input with ppb control
- 3 Digital inputs:
 - Makeup water meter
 - Bleed water meter
 - One configurable contact set
- 5 Relays with LED indicators and customizable faceplate descriptions:
 - 1 standard powered solenoid or motorized ball valve
 - 4 configurable relays
 - LED indicators for system status
- Up to two 4-20 mA outputs
- User selectable thermal or mechanical flow switch
- Load fuse alarm

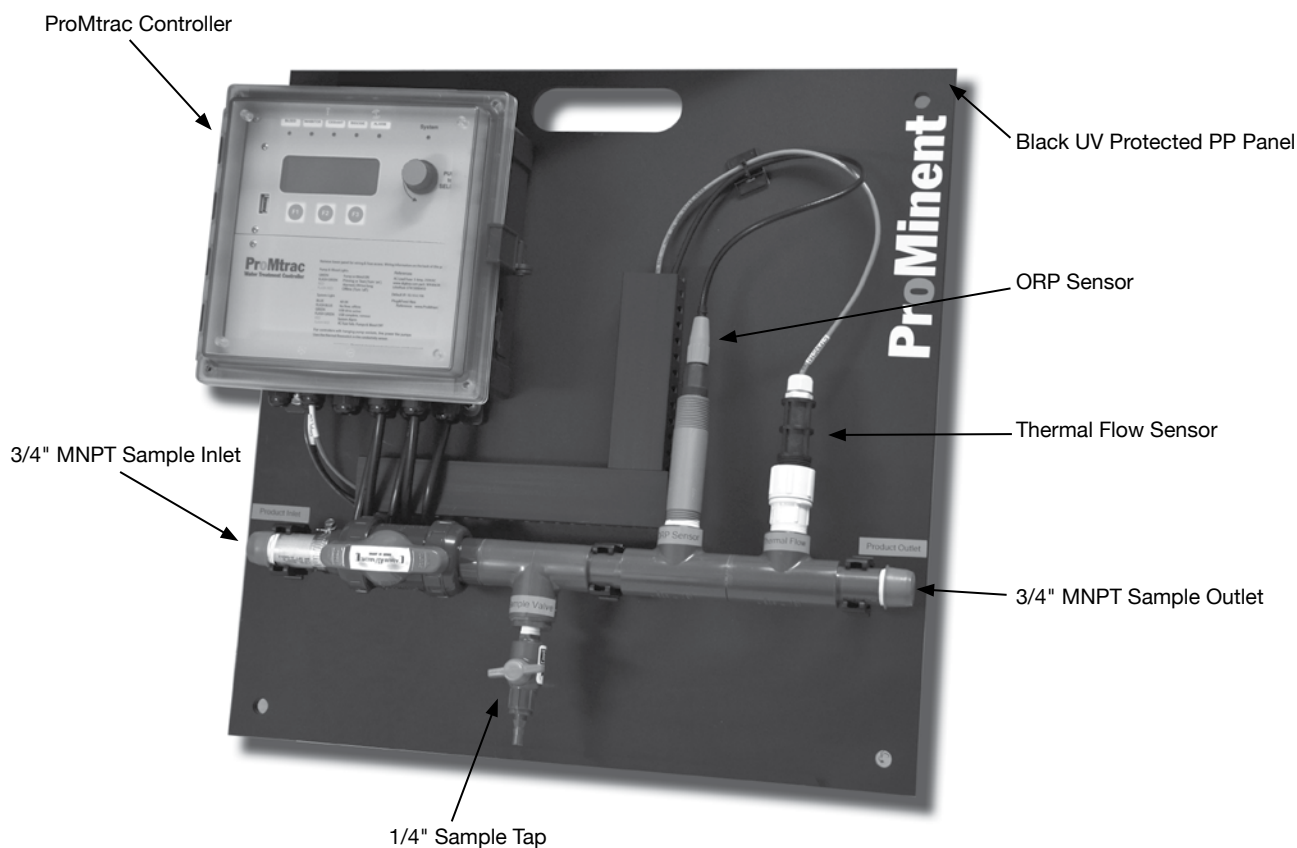

ProMinent® Cooling Tower & Boiler Controllers

Specifications

Inputs	Notes
Power	115/230 VAC, 50-60Hz, 5 amp
Conductivity Sensor #1	Tower conductivity sensor includes integral temperature and flow sensors
Conductivity Sensor #2	Make-up water conductivity sensor includes integral temperature and flow sensors
pH/ORP Sensor	ProMtrac can be configured with either a pH or ORP probe
Flow Meter #1	Accepts paddlewheel pulse output flow sensor
Flow Meter #2	Accepts paddlewheel pulse output flow sensor
4-20mA	For use with loop powered fluorometer. ProMtrac has internal power supply for sensor
Outputs	
4 Mechanical Relays	Form a dry contact with optional 115/230 VAC, 5 amp power available
1 Relay dedicated for bleed valve	Total load for all five relays fused at 5 amp total. Motor driven pumps will require interposing starter.
4-20mA, 300 Ohm resistive	Can be configured to represent conductivity, pH or ORP
USB Features	
Controller Configuration	Configuration file can be uploaded quickly and easily from memory stick
Operational Datalog	Signal Values, Relay Status, Analog Value(s), Time Stamp
Importing	Data easily imports into spreadsheet
Ethernet	
10/100 Base T, TCP/IP Ethernet LAN	HTML micro web server with user definable IP address
Mechanical	
Enclosure	Polycarbonate NEMA 4X (IP65)
Display	4 x 20 character backlit liquid crystal
Shipping Weight	7 lbs. (3 kg)
Sensor manifold/backpanel option	
Connections	3/4" NPTF
Temperature	140 °F (60°C)

ProMinent® Cooling Tower & Boiler Controllers

Identcode Ordering System: ProMtrac

PRMT	Version:																		
	A																		
		Enclosure Type:																	
		0	Standard																
			pH/ ORP Sensor:																
			0	None															
			1	pH															
			2	ORP															
				4-20mA Analog Input:															
				0	None														
				1	One														
					4-20 mA Analog Output:														
					0	none													
					1	one													
					2	two													
					Make-up Conductivity Sensor:														
					0	None													
					1	One													
					Power Cord:														
					0	None													
					1	US Standard 115 V													
					2	230 VAC North American Plug													
					Umbilical Outlets:														
					0	None													
					1	Quad-Box 115 VAC													
					2	Four Outlet Cords 115 VAC													
					Expansion:														
					0	None													
						Remote Communications:													
						0	None												
							Accessories:												
							0	None											
								Execution:											
								0	Standard										
									Language:										
									0	English									
										Approval:									
										0	Standard								
PRMT	A	0	0	0	0	0	0	0	1	2	0	0	0	0	0	0			

ProMinent® Cooling Tower & Boiler Controllers

Spare Parts & Accesories

Part Number	Description
7500979	Low pressure CTF conductivity/temperature/ flow assembly, 125 psi (sensor only 7761529)
7500980	High pressure CTF conductivity/temperature/ flow assembly, 300 psi (sensor only 7761533)
7760768	ORP sensor (RHEP OI-SE) (sensor only 150094)
7760729	pH sensor (PHED 112 SE) (sensor only 741036)
7500727	In-Line Fluorometer
7500850	Fuse
7501032	Programmed CII driver card
7501031	Programmed main board
7500790	4-20 mA driver output card
7500791	pH or ORP driver card

Dimensional Drawings: ProMtrac Package

