

DulcoFlex DFB 10 - Data Sheet



Capacity: .006 g/rev
Connections: 3/8" MNPT
Max Pressure: 116 psi
Rotor system: Rollers




Available Hoses: NR, NBR, EPDM, Hypalon, NR-A, NBR-A
Available Tubes: Norprene, Tygon

Technical data

Description	Material	Surface Treatment
Pump housing	Aluminium EN-AC-44100	Polyester powder coated Halar coated (Optional)
Front cover	Polycarbonate	
Rotor	Nodular Cast Iron EN-GJL-400	Cataphoresis
Rollers	Steel F-114	Blueing
Base plate	Stainless Steel AISI-304	Halar coating (optional)
Connections	Stainless Steel AISI-316 Polypropylene (Optional) PVDF (Optional)	

DulcoFlex DFB 10

DFB 10 Flow Rates

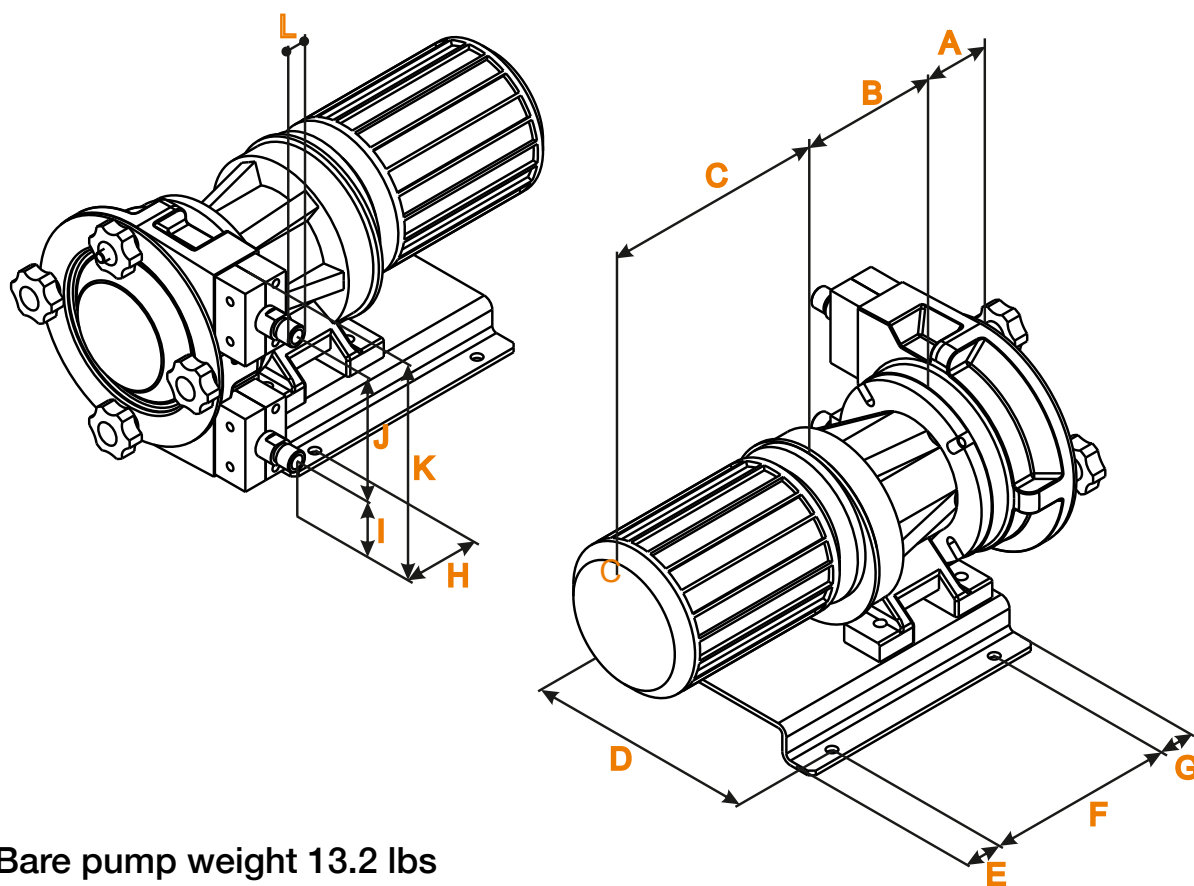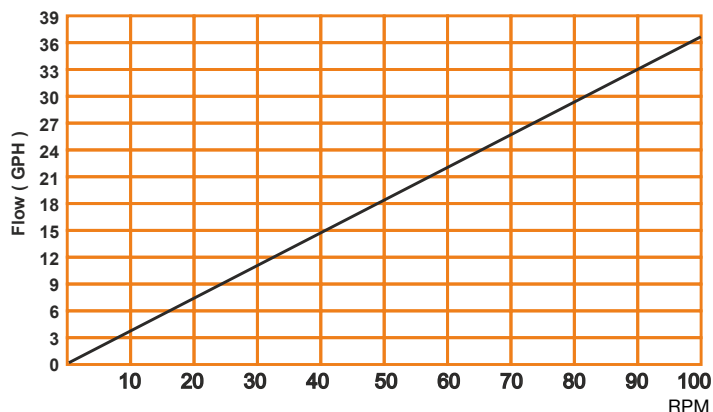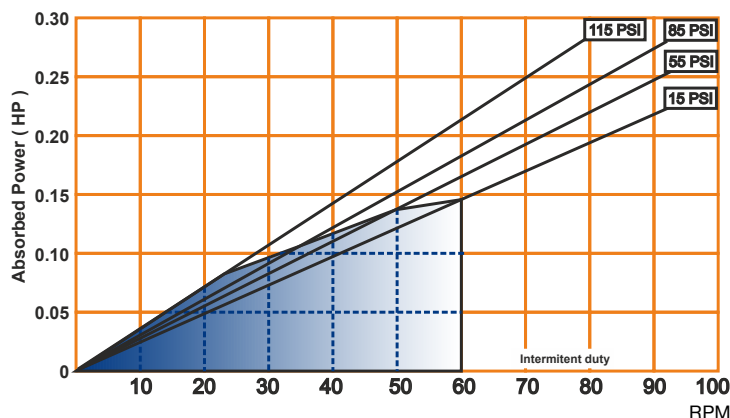

Bare pump weight 13.2 lbs

A	B	C	D	E	F	G	H	I	J	K	L
2.75"	*	*	7.5"	1.2"	6.3"	1.2"	2.4"	2.4"	4.5"	8.25"	3/8"

* TBD Based on motor & gear selection

ProMinent®

ProMinent Fluid Controls, Inc.

136 Industry Drive • Pittsburgh, PA 15275 USA

(412) 787-2484 • Fax: (412) 787-0704

email: sales@prominent.us • www.prominent.us

© 2017 ProMinent Fluid Controls, Inc. All Rights Reserved.

PN: 7750605
DulcoFlex_DFB_10.indd rev0 01/05/2017