

DulcoFlex DFB 22 - Data Sheet



Capacity: .066 g/rev
Connections: 1" MNPT
Max Pressure: 116 psi
Rotor system: Rollers





Available Hoses: NR, NBR, EPDM, Hypalon, NR-A, NBR-A
Available Tubes: Norprene, Silicone

Technical data

Description	Material	Surface Treatment
Pump housing	Aluminium EN-AC-44100	Polyester powder coated Halar coated (Optional)
Front cover	Polycarbonate	
Rotor	Nodular Cast Iron EN-GJL-400	Cataphoresis
Rollers	Steel F-114	Blueing
Base plate	Stainless Steel AISI-304 (optional)	Halar coating (optional)
Connections	Stainless Steel AISI-316 Polypropylene (Optional) PVDF (Optional)	

DulcoFlex DFB 22

DFB 22 Flow Rates

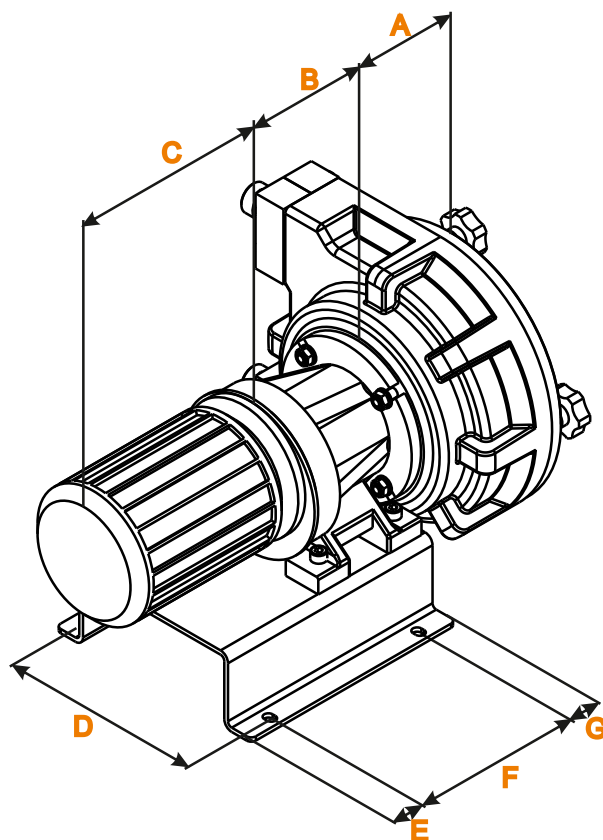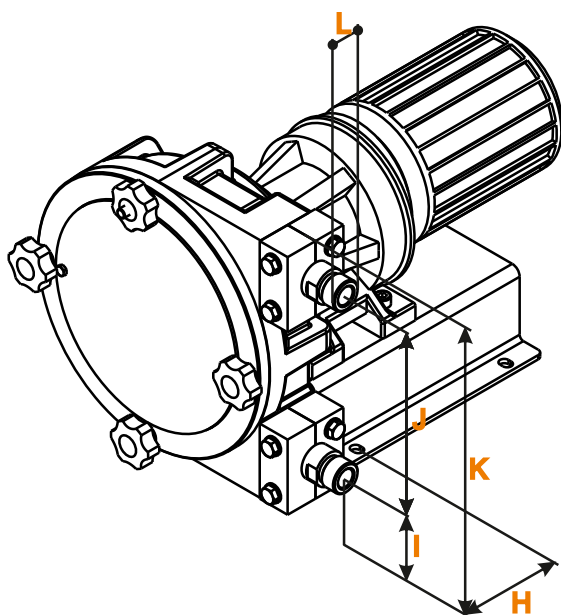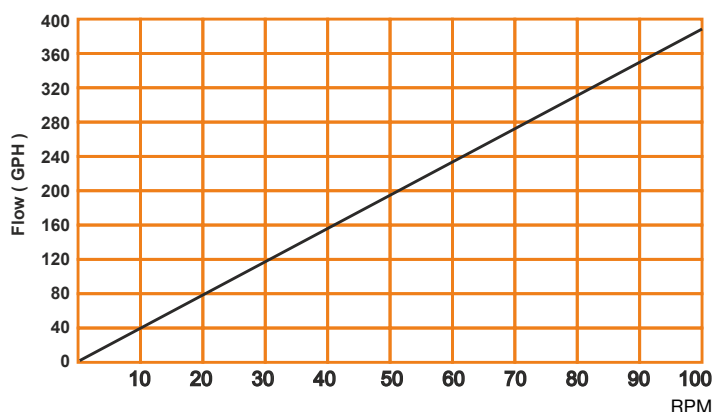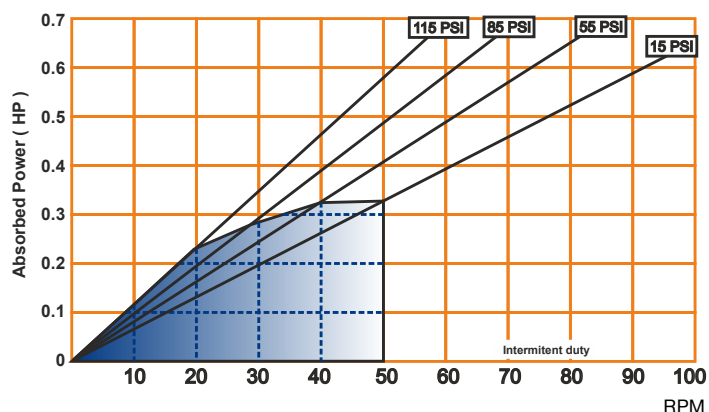

Bare pump weight 48.5 lbs

A	B	C	D	E	F	G	H	I	J	K	L
4.3"	*	*	9.6"	1"	6.9"	1"	3.7"	3.3"	7.9"	14"	1"

* TBD Based on motor & gear selection

ProMinent[®]

ProMinent Fluid Controls, Inc.

136 Industry Drive • Pittsburgh, PA 15275 USA

(412) 787-2484 • Fax: (412) 787-0704

email: sales@prominent.us • www.prominent.us

© 2017 ProMinent Fluid Controls, Inc. All Rights Reserved.

PN: 7750609
DulcoFlex_DFB_22.indd rev0 01/05/2017