

DulcoFlex DFC 70 - Data Sheet

Hose Pump Roller Technology



Capacity: 2.13 g/rev
Connections: 2 1/2" ANSI Flange
Max Pressure: 116 psi
Rotor system: Nylon rollers




Available Hoses: NR, NBR, EPDM, Hypalon, NR-A, NBR-A
Available Tubes: Not Available

Technical data

Description	Material	Surface Treatment
Pump housing	Cast Iron EN-GJL-250	Polyester powder coated Halar coated (Optional)
Front cover	Steel F-111 / Polycarbonate	Polyester powder coated Halar coated (Optional)
Rotor	Nodular Cast Iron EN-GJL-400	Cataphoresis
Rollers	Steel F-114 + Polyurethane	
Base plate	Steel F-111	Polyester powder coated
Connections	Stainless Steel AISI-304 (optional) Stainless Steel AISI-316 Polypropylene (Optional) PVDF (Optional)	

DulcoFlex DFC 70

DFC 70 Flow Rates

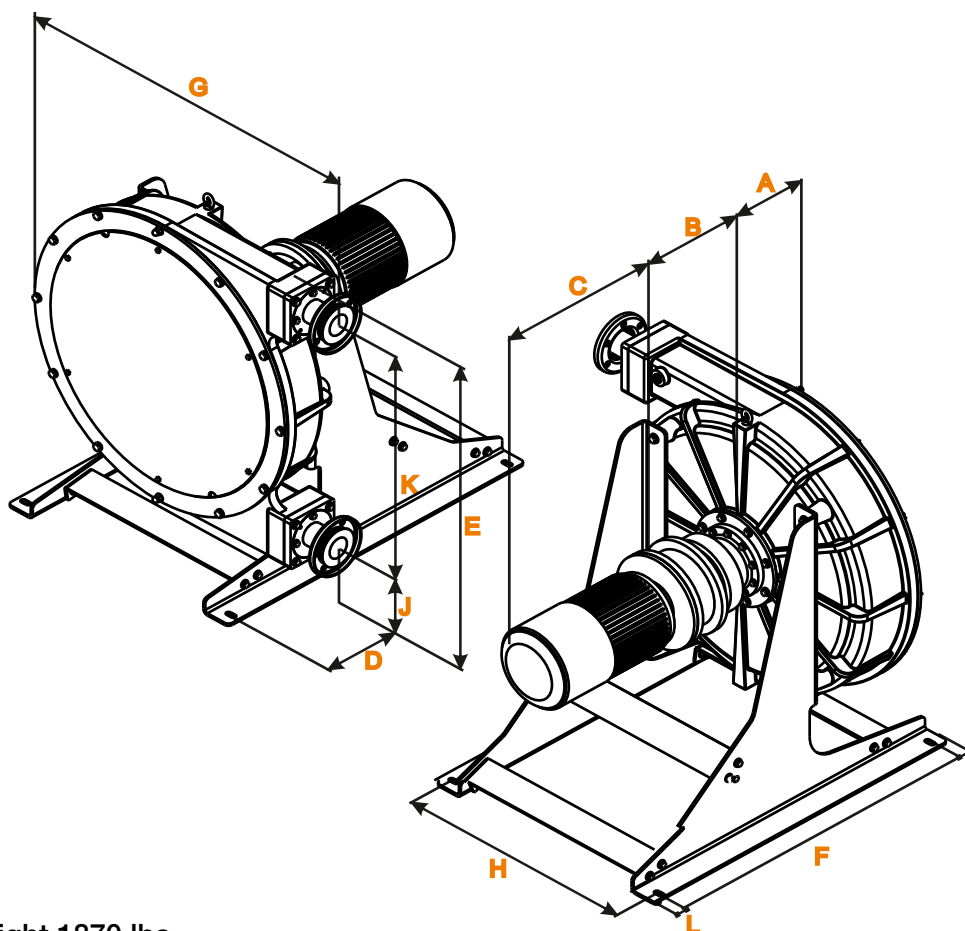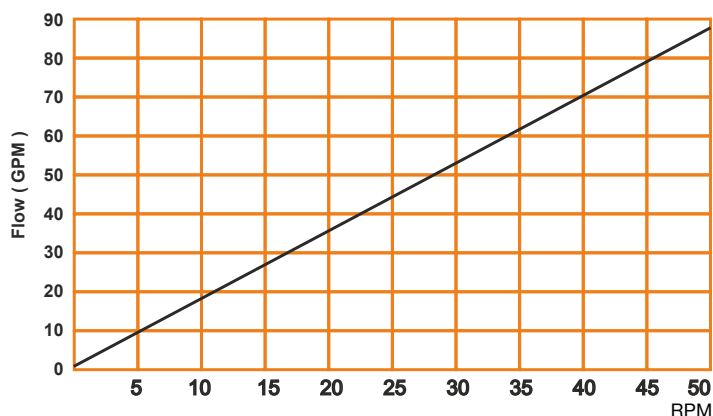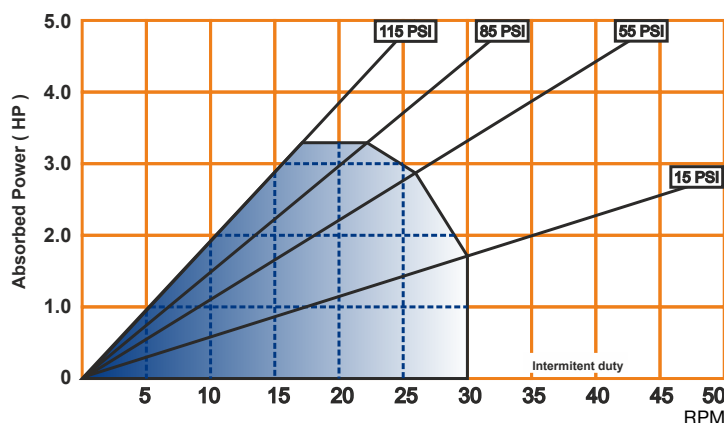

Bare pump weight 1870 lbs

A	B	C	D	E	F	G	H	I	J	K	L
8.5"	*	*	9.8"	44"	42"	43.3"	31"	1.6"	9.4"	31"	1.6"

* TBD Based on motor & gear selection

ProMinent[®]

ProMinent Fluid Controls, Inc.

136 Industry Drive • Pittsburgh, PA 15275 USA

(412) 787-2484 • Fax: (412) 787-0704

email: sales@prominent.us • www.prominent.us

© 2017 ProMinent Fluid Controls, Inc. All Rights Reserved.

PN: 7750614
DulcoFlex_DFC_70.indd rev0 03/27/2017