

DulcoFlex DFD 25 - Data Sheet

High flows and high pressures with the DFD series pumps



Capacity: .08 g/rev
Connections: 1" ANSI flange
Max Pressure: 232 psi
Rotor system: Shoes




Available Hoses: NR, NBR, EPDM, Hypalon, NR-A, NBR-A
Available Tubes: Not Available

Technical data

Description	Material	Surface Treatment
Pump housing	Cast Iron EN-GJL-250	Polyester powder coated Halar coated (Optional)
Front cover	Steel F-111 / Polycarbonate	Polyester powder coated Halar coated (Optional)
Rotor	Nodular Cast Iron EN-GJL-400	Cataphoresis
Shoes	Nodular Cast Iron EN-GJL-400	Hardened
Base plate	Steel F-111	Polyester powder coated
Connections	Stainless Steel AISI-304 (optional) Stainless Steel AISI-316 Polypropylene (Optional) PVDF (Optional)	

DulcoFlex DFD 25

DFD 25 Flow Rates

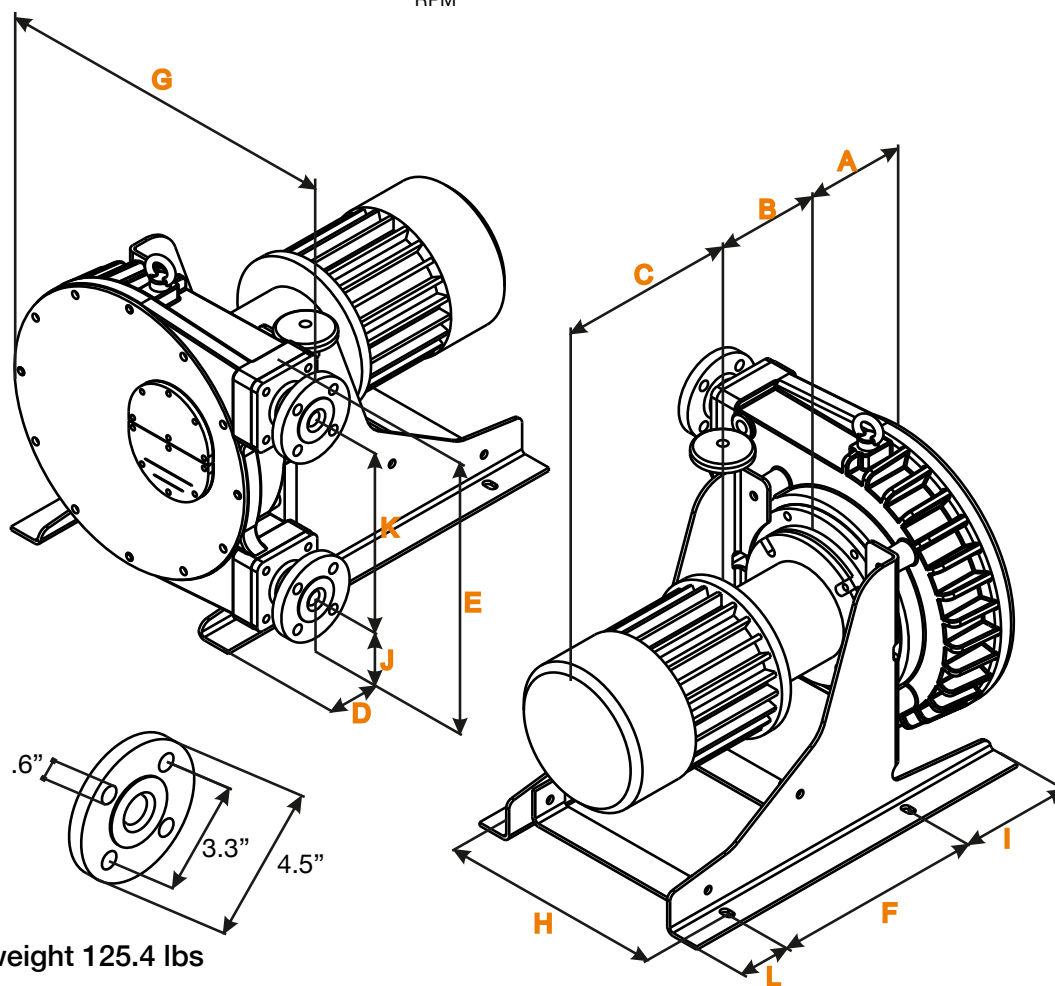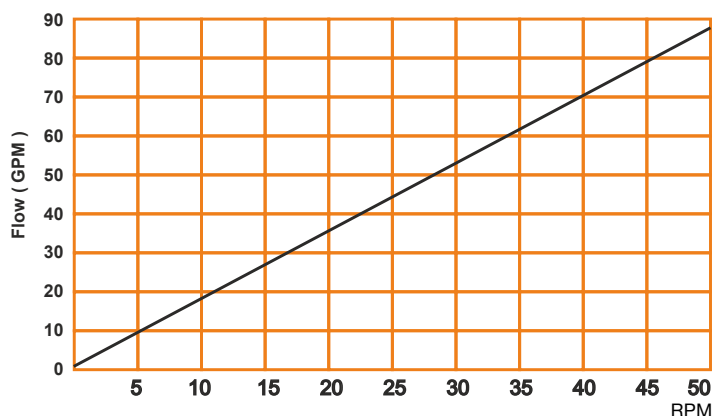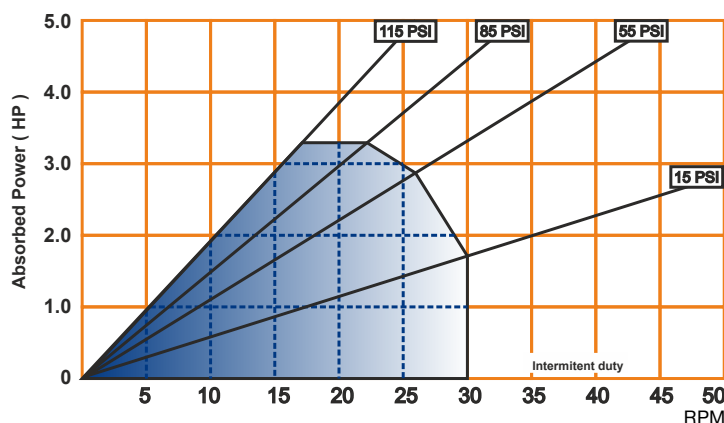

Bare pump weight 125.4 lbs

A	B	C	D	E	F	G	H	I	J	K	L
5"	*	*	2.4"	16.7"	12"	18.5"	12"	6.3"	4"	10.3"	3"

* TBD Based on motor and gear selection

ProMinent[®]

ProMinent Fluid Controls, Inc.

136 Industry Drive • Pittsburgh, PA 15275 USA

(412) 787-2484 • Fax: (412) 787-0704

email: sales@prominent.us • www.prominent.us

© 2017 ProMinent Fluid Controls, Inc. All Rights Reserved.

PN: 7750615

DulcoFlex_DFD_25.indd rev0 03/27/17