

High Flow Pump Accessories: AC Motors and DC Motors

Description

Part No.

AC and DC Motors

AC motors

All AC motors are recognized by Underwriters Laboratories component approval program, and Canadian Standards Association.

All motors are 1725 RPM, C-faced, and 60 Hz. Manufacturer may vary.

1/3 HP	TEFC	56-C	115/208-230V	1 phase	7951046
1/3 HP	TEFC	56-C	208-230/460V	3 phase	7951048
1/2 HP	TEFC	56-C	115/208-230V	1 phase	7951021
1/2 HP	TEFC	56-C	208-230/460V	3 phase	7951023
3/4 HP	TEFC	56-C	115/208-230V	1 phase	7951060
3/4 HP	TEFC	56-C	208-230/460V	3 phase	7951061
1 HP	TEFC	56-C	208-230/460V	3 phase	7951024
1-1/2 HP	TEFC	56-C w/base	115/208-230V	1 phase	7951025
1-1/2 HP	TEFC	56-C w/base	208-230/460V	3 phase	7951026
3 HP	TEFC	*184TC	230V	1 phase	7951141
3 HP	TEFC	*182TC	208-230/460V	3 phase	7951142

* Must use adapter (see below)

AC explosion-proof motors

Corrosion resistant epoxy finish. Positively locked drive end bearing.
UL and CSA approved for Class I, Group D or Class II, Group F and G.
UL approved cast conduit box-standard.
Manufacturer may vary.

1/3 HP	56-C	115/208-230V	1 phase	7951014
1/3 HP	56-C	208-230/460V	3 phase	7951013
1/2 HP	56-C	115/208-230V	1 phase	7951006
1/2 HP	56-C	208-230/460V	3 phase	7951005
3/4 HP	56-C	115/208-230V	1 phase	7951004
3/4 HP	56-C	208-230/460V	3 phase	7951003
1 HP	56-C	208-230/460V	3 phase	7744983
1-1/2 HP	56-C w/base	208-230/460V	3 phase	7951002
3 HP	*182TC	208-230/460V	3 phase	7951001

* Must use adapter (see below)

Adapter * (Required when using motors with 184TC or 182TC face)

Mounting flange and motor shaft coupling (Makro pumps w/3 HP, AC motors)	7951144
--	---------

DC motors

Permanent magnet 1750 rpm.

1/3 HP	TENV	90 V	56-C	Sigma	7951078
1/2 HP	TENV	90 V	56-C	Meta	7951079
3/4 HP	TEFC	90 V	56-C	Sigma/3, Meta, Makro, Hydro	7951080
1-1/2 HP	TEFC	180 V	145-TC	Makro, Hydro	7951081
3 HP	TEFC	180 V	184-C	Makro	7951140

High Flow Pump Accessories: Replacement Brushes and Motors

Description	Part No.
-------------	----------

Replacement Brushes for DC Motors

Brushes for 1/3, 1/2 & 3/4 HP motor	7500185
Brush springs for 1/3, 1/2 & 3/4 HP motor	7500186
Brush assembly for 1-1/2 HP motor	7500187
Brushes for 3 HP motor	7500188
Brush springs for 3 HP motor	7500189

AC Replacement Motors for Sigma Control Version Pumps

Sigma/1 Control Types 12017, 10022, 07042	1018433
Sigma/1 Control Types 12035, 10044, 04084	1018432
Sigma/1 Control Types 10050, 07065, 04120	1018455
Sigma/2 Control (all Types)	1011036
Sigma/3 Control (all Types)	1006918

High Flow Pump Accessories:

AC Inverters and Inverter Duty Rated Motors

Description	Part No.
-------------	----------

AC Inverter

Provides variable motor speed with three-phase AC motors by adjusting the frequency (Hz) output to the motor. Motor not included with inverter. See motor section for three-phase motors. Features NEMA 4/12 enclosure with keypad and display of percent load or output voltage. Selectable for local or remote operation via 4-20 mA signal. Minimum speed 3-30 Hz.

Specifications

For 1/4 to 1 HP motors with line voltage 208-230 VAC, 3 phase	7961001
3 phase AC output: 4.5 A	
Weight: 7 lbs (3.2 kg)	
Dimensions: (H x W x D) 12 x 5.5 x 4.7" (305 x 140 x 120 mm)	
For 1-1/2 to 2 HP motors with line voltage 208-230 VAC, 3 phase	7961002
3 phase AC output: 7.5 A	
Weight: 18 lbs (8.2 kg)	
Dimensions: (H x W x D) 13.3 x 11 x 6.25" (338 x 280 x 159 mm)	
For 1/4 to 1 HP motors with line voltage 380-460 VAC, 3 phase	7961003
3 phase AC output: 2.1 A	
Weight: 12 lbs (5.4 kg)	
Dimensions: (H x W x D) 11.1 x 8.8 x 6.25" (282 x 224 x 159 mm)	
For 1-1/2 to 2 HP motors with line voltage 380-460 VAC, 3 phase	7961004
3 phase AC output: 3.4 A	
Weight: 12 lbs (5.4 kg)	
Dimensions: (H x W x D) 11.1 x 8.8 x 6.25" (282 x 224 x 159 mm)	
For 3 HP motors with line voltage 208-230 VAC, 3 phase	7744984
For 3 HP motors with line voltage 380-460 VAC, 3 phase	7744985

Inverter Duty Rated Motors

1/3 HP	TENV	230/460 VAC	56C	3 phase	7951146
1/2 HP	TENV	230/460 VAC	56C	3 phase	7951145
3/4 HP	TENV	230/460 VAC	56C	3 phase	7951147
1 HP	TENV	230/460 VAC	143TC	3 phase	7744373
1-1/2 HP	TENV	230/460 VAC	143TC	3 phase	7951149
3 HP	TENV	230/460 VAC	*184TC	3 phase	7951143

* Must use adapter (see below)

Adapter * (Required when using motors with 184TC or 182TC face)

Mounting flange and motor shaft coupling (Makro pumps w/3 HP, AC motors)	7951144
--	---------

High Flow Pump Accessories: Variable Speed Drives

Description

Part No.

Dart DC SCR Drives with Motors

Dart DC SCR drives with motors

DC SCR variable speed motor and drive system, 1725 RPM max., AC line input voltage 120 (for 90 VDC motors) or 240 VAC (for 180 VDC motors), 1 phase, 50/60 Hz.

1/3 HP to 1/2 HP models with DC 56C frame TENV motors.


3/4 HP to 1-1/2 HP models with DC 56C/143TC frame TEFC motors.

Manual mode: Output voltage to motor is proportional to potentiometer setting between 20% and 100%. **In manual mode, setting 0 VDC output = 20% setting on potentiometer.**

Auto mode: Output voltage to motor is proportional to external 4-20 mA input (20 mA = 100%, 4 mA = 0%). Linearity is excellent between 100% and 10% (20 to 5.6 mA), and drops off below 10%. With manual/off/auto (external) switch. NEMA 4/12 enclosure.

1/3 HP SCR drive w/90 VDC motor	} (requires 115/230 VAC input, 1 phase)	7951015
1/2 HP SCR drive w/90 VDC motor		7951010
3/4 HP SCR drive w/90 VDC motor		7951011
1-1/2 HP SCR drive w/180 VDC motor (requires 208-240 VAC input, 1 phase)		7951020

Dart DC SCR drives and motors with tach feedback

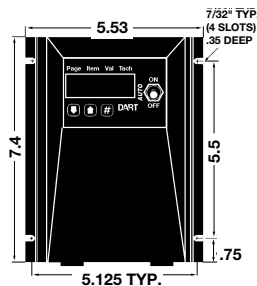

DC SCR variable speed motor, tachometer and drive system, 1725 RPM max., AC line input voltage 120 or 240 VAC, 1 phase, 50/60 Hz. DC output 90 or 180 volts.

1/3 HP to 1/2 HP models with DC 56C frame TENV motors; 3/4 HP to 1-1/2 HP models with DC 56C/143TC frame TEFC motors. Tachometer mounted between motor C-face and pump flange.

Includes long motor coupling to accommodate tach.

Manual mode: Digital RPM control by up/down keypad, LED readout in RPM or programmable engineering units (e.g. percent, strokes/min., flow rate, etc.). Actual RPM measured by tach corresponds to manual setpoint. Minimum speed 8 RPM.

External mode: Actual RPM measured by tach is proportional to analog 4-20 mA input (20 mA = 100%, 4 mA = 0%). Minimum speed 8 RPM.

1/3 HP SCR drive w/90 VDC motor and tach (requires 115 VAC input)	7951090
1/2 HP SCR drive w/90 VDC motor and tach (requires 115 VAC input)	7951094
3/4 HP SCR drive w/90 VDC motor and tach (requires 115 VAC input)	7951095
1-1/2 HP SCR drive w/180 VDC motor and tach (requires 230 VAC input)	7951096
1/2 HP SCR drive w/90 VDC motor and tach MD30P-panel mount	7951127
3/4 HP SCR drive motor and tach MD30P-panel mount	7951128

High Flow Pump Accessories: Variable Speed Drives

Description	Part No.
-------------	----------

KB Penta SCR Drives with Motors

KB Penta SCR drives with motors

SCR variable speed motor and drive system, 1725 RPM max.,
AC line input voltage 120 (for 90 VDC motors) or 240 VAC (for 180 VDC motors),
1 phase, 50/60 Hz.

1/3 HP to 1/2 HP models with DC 56C frame TENV motors.
3/4 HP to 1-1/2 HP models with DC 56C/143TC frame TEFC motors.

Local mode: Output voltage to motor is proportional to potentiometer setting between 20% and 100%.

Remote mode: Output voltage to motor is proportional to external 4-20 mA input (20 mA = 100%, 4 mA = 0%). Linearity is excellent between 100% and 10% (20 to 5.6 mA), and drops off below 10%. With START/STOP and LOCAL/REMOTE switches. NEMA 4X enclosure.

1/3 HP SCR drive w/90 VDC motor (requires 115 VAC input)	7500086
1/2 HP SCR drive w/90 VDC motor (requires 115 VAC input)	7500087
3/4 HP SCR drive w/90 VDC motor (requires 115 VAC input)	7500088
1-1/2 HP SCR drive w/180 VDC motor (requires 230 VAC input)	7500089

Dart and KB-Penta DC SCR drive without motor

Variable speed drive for controlling the voltage output to DC motors. Motor not included with SCR. See motor section for selection.

KB Penta SCR Drive without Motor

2 HP Max, 90/180 VDC Out, 120/240 VAC In, SCR Drive, KB Penta KBPC-240D 7961005
(with 120 VAC Input, drive rating is 1 HP @ 90 VDC to motor)

Dart 250 Series Variable Speed DC Control

2 HP Max, 90/180 VDC Out, 120/240 VAC In, SCR Drive, 253-200E-7-4X 7740941
(with 120 VAC Input, drive rating is 1 HP @ 90 VDC to motor)

Dart MDII Series Programmable Drives (requires tachometer, below)

1 HP Max, 90 VDC Out, 120 VAC In, SCR Drive, MD30E-7	7951120
2 HP Max, 180 VDC Out, 240 VAC In, SCR Drive, MD30P-5-7	7951124
1 HP Max, 90 VDC Out, 120 VAC In, SCR Drive, MD30P Panel Mount	7951126
2 HP Max, 180 VDC Out, 240 VAC In, SCR Drive, MD30P-5 Panel Mount	7951129

C-Faced Tachometers for Programmable Dart SCR Drives above

NEMA 56C, 60 Pulses per revolution, Dart CF-H60	7951121
NEMA 143TC, 145TC, 182C, 184C, 60 Pulses per revolution, Dart CF-J60	7951122

High Flow Pump Accessories:

*Canadian AC Motors

Description	Part No.
-------------	----------

AC Motors *(for Canadian customers only)

AC motors

All AC Motors are approved by CSA.

All motors are 1725 RPM, 60 Hz, manufacturers may vary.

<u>Horsepower</u>	<u>Enclosure</u>	<u>Frame</u>	<u>AC Voltage</u>	<u>Phase</u>	<u>Part no.</u>
1/3 HP	TEFC	56 C	115 / 208-230	1 phase	7901317
1/3 HP	TEFC	56 C	208-230 / 460	3 phase	7901329
1/3 HP	TEFC	56 C	575	3 phase	7901323
1/2 HP	TEFC	56 C	115 / 208-230	1 phase	7901318
1/2 HP	TEFC	56 C	208-230 / 460	3 phase	7901330
1/2 HP	TEFC	56 C	575	3 Phase	7901324
3/4 HP	TEFC	56 C	115 / 208-230	1 phase	7901319
3/4 HP	TEFC	56 C	208-230 / 460	3 phase	7901331
3/4 HP	TEFC	56 C	575	3 phase	7901325
1 HP	TEFC	56 C	115 / 208-230	1 phase	7901320
1 HP	TEFC	56 C	208-230 / 460	3 phase	7901332
1 HP	TEFC	56 C	575	3 phase	7901326
1-1/2 HP	TEFC	56 C	115 / 208-230	1 phase	7901321
1-1/2 HP	TEFC	56 C	208-230 / 460	3 phase	7901333
1-1/2 HP	TEFC	56 C	575	3 phase	7901327
3 HP*	TEFC	182 TC	208-230 / 460	3 phase	7901334
3 HP*	TEFC	184 C	575	3 phase	7901322
3 HP*	TEFC	182 TC	575	3 phase	7901328

* Must use adapter (see below)

AC explosion-proof motors

All motors come with an explosion proof conduit box and built in overload protection.

CSA approved for Class I Group C and D, or Class II Group F and G.

Manufacturer may vary.

<u>Horsepower</u>	<u>Enclosure</u>	<u>Frame</u>	<u>AC Voltage</u>	<u>Phase</u>	<u>Part no.</u>
1/3 HP	EXP	56 C	115 / 208-230	1 phase	7901335
1/3 HP	EXP	56 C	208-230 / 460	3 phase	7901339
1/3 HP	EXP	56 C	575	3 phase	7901340
1/2 HP	EXP	56 C	115 / 208-230	1 phase	7901336
1/2 HP	EXP	56 C	208-230 / 460	3 phase	7901341
1/2 HP	EXP	56 C	575	3 phase	7901342
3/4 HP	EXP	56 C	115 / 208-230	1 phase	7901337
3/4 HP	EXP	56 C	208-230 / 460	3 phase	7901343
3/4 HP	EXP	56 C	575	3 phase	7901344
1 HP	EXP	56 C	115 / 208-230	1 phase	7901338
1 HP	EXP	56 C	208-230 / 460	3 phase	7901345
1 HP	EXP	56 C	575	3 phase	7901346
1-1/2 HP	EXP	56 C	208-230 / 460	3 phase	7901347
1-1/2 HP	EXP	56 C	575	3 phase	7901348

***Flange Adapter** (Required for installing 3 HP motors or motors with 182/184 frames)

Mounting flange and motor shaft coupling (Makro pumps w/3 HP, AC motors)	7951144
--	---------

High Flow Pump Accessories: *Canadian AC Inverters and Inverter Duty Rated Motors

Description

Part No.

AC Inverter *(for Canadian customers only)

Provides variable motor speed with three phase AC Motors by adjusting the frequency (Hz) output to the motor. The motor is not included with the inverter. Choose the motor from the AC Inverter Duty Rated Motors section following the listing of Inverters. Push button keypad and display for Hertz, RPM, % Frequency.

All Inverter AC output voltage is 3 phase.

Maximum Motor HP	AC Input	Phase	AC Output	Dim. (mm) H x W x D	Enclosure	Part no.
1/2 HP	120/240	1 ph	230 V 2.2 A	200 x 200 x 95	NEMA 4	7901357
1/2 HP	200/240	3 ph	230 V 2.2 A	200 x 155 x 110	NEMA 4	7901360
1 HP	120/240	1 ph	230 V 4 A	200 x 200 x 125	NEMA 4	7901363
1 HP	200/240	3 ph	230 V 4 A	200 x 155 x 110	NEMA 4	7901366
1 HP	400/480	3 ph	460 V 2 A	200 x 155 x 110	NEMA 4	7901369
1 HP	590	3 ph	575 V 1.6 A	200 x 155 x 110	NEMA 4	7901372
1-1/2 HP	120/240	1 ph	230 V 5.2 A	200 x 200 x 125	NEMA 4	7901375
1-1/2 HP	200/240	3 ph	230 V 5.2 A	200 x 200 x 125	NEMA 4	7901378
2 HP	200/240	3 ph	230 V 6.8 A	200 x 200 x 125	NEMA 4	7901381
2 HP	400/480	3 ph	460 V 3.4 A	200 x 200 x 125	NEMA 4	7901384
2 HP	590	3 ph	575 V 2.7 A	200 x 200 x 125	NEMA 4	7901387
3 HP	200/240	3 ph	230 V 9.6 A	200 x 200 x 150	NEMA 4	7901390
3 HP	400/480	3 ph	460 V 4.8 A	200 x 200 x 125	NEMA 4	7901393
3 HP	590	3 ph	575 V 3.9 A	200 x 200 x 125	NEMA 4	7901396

AC Inverter Duty Rated Motors *(for Canadian customers only)

HP	Enclosure	Frame	AC Voltage	Phase	Part no.
1/3 HP	TEFC	56 C	230/460	3 phase	7902404
1/3 HP	TEFC	56 C	575	3 phase	7902407
1/2 HP	TEFC	56 C	230/460	3 phase	7902405
1/2 HP	TEFC	56 C	575	3 phase	7902408
3/4 HP	TEFC	56 C	230/460	3 phase	7902406
3/4 HP	TEFC	56 C	575	3 phase	7902409
1 HP	TEFC	56 C	208-230 / 460	3 phase	7901332
1 HP	TEFC	56 C	575	3 phase	7901326
1-1/2 HP	TEFC	56 C	208-230 / 460	3 phase	7901333
1-1/2 HP	TEFC	56 C	575	3 phase	7901327
3 HP*	TEFC	182 TC	208-230 / 460	3 phase	7901334
3 HP*	TEFC	184 C	575	3 phase	7901322
3 HP*	TEFC	182 TC	575	3 phase	7901328

* Flange Adapter 7951144 Required for installing 3 HP motors or motors with 182/184 frames.

High Flow Pump Accessories: *Canadian DC Motors, SCR Controller and Economy Penta Drive

Description	Part No.
-------------	----------

DC Motors *(for Canadian customers only)

DC motors

Permanent magnet 1750 RPM.

<u>Horsepower</u>	<u>Enclosure</u>	<u>Frame</u>	<u>AC Voltage</u>	<u>Part no.</u>
1/3 HP	TEFC	0 – 90 VDC	56 C	7902413
1/2 HP	TEFC	0 – 90 VDC	56 C	7902412
3/4 HP	TEFC	0 – 90 VDC	56 C	7356703
1-1/2 HP	TEFC	0 – 180 VDC	56 C	7902411

SCR Control for DC Motors *(for Canadian customers only)

The SCR control does not come with a motor. Select the required DC motor from the DC motor list.

The KB Penta DC Drive is used to control the DC voltage to DC motors. This controls the speed of the motor. The DC voltage is variable from 0 – 90 VDC or 0 – 180 VDC which represents 0 to approximately 1750 RPM motor speed.

Features of this drive include: Manual –OFF – Auto selector switch; Speed pot for manual motor speed control; Auto motor speed control via an isolated 4 – 20 mA input. Single phase line input voltage is selectable as 120 VAC (for 0 – 1 HP motors 0 – 90 VDC) or 230 VAC (for 0 – 2 HP motors 0 – 180 VDC).

For motors 0 – 1 HP, 120 VAC in 0 – 90 VDC out

For motors 0 – 2 HP, 230 VAC in 0 – 180 VDC out

KB Penta DC Drive SCR Controller	7356704
----------------------------------	---------

Economy KB Penta AC Drive *(for Canadian customers only)

This lower cost AC inverter can control motor speed on AC motors up to 1 HP. It has a selectable 115 VAC or 230 VAC input and generates a 230 VAC 3 phase 3.6 A output. Features include switch selectable manual / auto operation, Manual speed control via local potentiometer and Auto speed control via a 4 – 20 mA input. Motor is not included with the drive, select the motor from the AC Inverter Duty Rated Motor list.

Dimensions (mm) 241 x 140 x 148 (H x W x D)

Economy KB Penta AC Drive	7902410
---------------------------	---------


High Flow Pump Accessories: Stroke-positioning Systems and Motors

Description

Part No.

Analog and 3-P Stroke Positioning Systems

Analog stroke-positioning system:

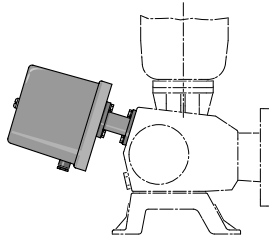

1025/2

Note: Stroke positioning motors must be field wired to remove power when the pump drive motor is stopped. For automatic stroke-length control with positioning motor, controlled by a standard process signal.

Technical data:

With standard process signal input 4-20 mA, corresponding to 0-100% stroke length.

Power supply: 115V or 230 V, 60 Hz, 1 phase.

Manual/automatic mode selector switch.

Spring-return switch for manual stroke-length adjustment.


Mechanical stroke-length indicator.

Positioning time about 1 second per 1% stroke length

Stroke-positioning control system 4-20 mA	Type	115 V	230 V
	Vario	807098	
	Meta HM (4 mm)	803887	
	Sigma/2 HM (5 mm)	1018894	1018893
	Meta HM (6 mm)	1001826	
	Meta HK	803506	803879
	Sigma/2 HK	1018890	1018889
	Sigma/3, Hydro	1006504	1006505
	Makro	1020798	

Note: Stroke positioning system for Hydro is included in the identity code only.

3P Stroke-positioning motor

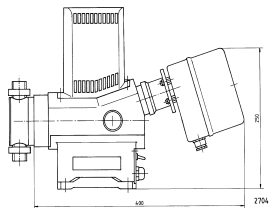

2704/3

Automatic stroke-positioning system with positioning motor, positioning time about 1 sec. per 1% of total stroke length, equipped with limit switches for minimum and maximum positions, position feedback potentiometer 1 kOhm to transmit actual position. Enclosure rating NEMA 3.

Power supply: 115 V or 230 V, 50/60 Hz, 1 phase.

Other voltages available upon request.


Please state voltage when ordering.

Stroke-positioning motor	Type	115 V	230 V
	Vario	807096	
	Meta HM (4 mm)	803885	
	Sigma/2 HM (5 mm)	1018891	1018892
	Meta HM (6 mm)	1001824	
	Meta HK	803502	803895
	Sigma/2 HK	1018888	1018887
	Sigma/3, Hydro	1006506	1006507

Note: Stroke positioning system for SIBa is included in the identity code.

For manual and automatic remote stroke-length adjustment we recommend the positioning control system using the D1C controllers.

3P Stroke-positioning motor

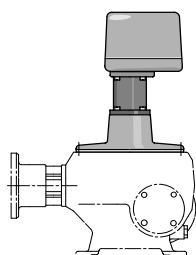

1424/2

For automatic stroke-length adjustment, positioning time about 1 sec. per 1% of total stroke length, equipped with limit switches for minimum and maximum positions, and feedback potentiometer 1 kOhm to transmit actual position, enclosure rating NEMA 3.

Stroke-positioning motor	Type	115 V	230 V
	Makro HM/HK	7806506	806506


For manual and automatic remote stroke-length adjustment we recommend the positioning control system using the D1C controllers.

High Flow Pump Accessories: Control Systems

Description

Part No.

Control Systems

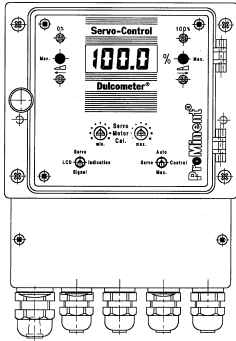

2273/4

3P Positioning control system: Servo Control


This positioning control system is used for externally positioning servo-motors on metering pumps or motor valves either automatically or manually. Works with Vario 3P stroke positioning system.

The analog input signal (e.g. 4 - 20 mA from flow meter) is compared with the position feedback signal from the servo-motor. If the input signal departs from the position feedback signal, the position of the servo-motor is varied until both values coincide. Even without an input signal, the system can be used for remote manual position control of the servo-motor and for remote position indication.

The following input signal ranges can be selected by the user by means of plug-in jumpers: 4 - 20 mA, 0.2 - 1 V, 1 - 5 V and 2 - 10 V.

A 1 kOhm potentiometer on the stroke positioning motor or control valve is required to generate a position feedback signal. Either the input signal or the feedback signal (selectable) can be shown on the LCD display as a percentage. The minimum and maximum servo-motor positions can be assigned to the input signal by means of two calibrating potentiometers. The contact rating of the two motor control relays is max. 2 A.

Type SCWS 1000	115 V, 50/60 Hz, 4 - 20 mA in, 4 - 20 mA out	7744552
	230 V, 50/60 Hz, 4 - 20 mA in, 4 - 20 mA out	7744553
	115 V, 50/60 Hz, 4 - 20 mA in	924966
	230 V, 50/60 Hz, 4 - 20 mA in	924967



pk_2_049

Dos-Control Dosing Controller

The Dos-Control dosing controller is a universal controller for controlling motor driven metering pumps and solenoid valves. It is based on the D1CW controller range. The following functions are built in as standard:

1. Control Settings Selection

- Adjustment of preset stroking rate via key pad and LCD display (0-29999 strokes)
- Start contact via key pad or external contact
- Metering pump stroke position response signal via pulse generator/stroke sensor
- Metering pump control via output relay (230 V, 5 A) i.e. voltage to pump motor, on/off
- Fault indicator relay output, i.e. on site fault indicator
- Liquid end monitor, terminal for single stage float switch

2. Proportional Flow Controller

- Control of pump via:
 - voltage free contact input, e.g. setting min./max. limits for water meter via keypad and LCD display
 - internal control via adjustable stroking rate
 - analog control via 0/4 - 20 mA input with adjustable max. stroking rate
- Metering pump control via output relay (230 V, 5 A) i.e. voltage to pump motor, on/off
- Fault indicator relay output, i.e. on site fault indicator
- Level monitor, terminal for float switch


Dos-Control	230 V, 50/60 Hz	1001306
	115 V, 50/60 Hz	1001925

High Flow Pump Accessories: Stroke Sensors

Description	Part No.
-------------	----------

Stroke sensors

Meta




1560/4

To be installed on the output of the eccentric shaft. For accurate registration of every pump stroke, consisting of switching cams and an inductive sensor. Power/output signal type is 3-Wire PNP sourcing. Operates on 10-30 VDC. Used for flow verification or totalizing when used with ratemeters, totalizers, batch controllers, or PLC's

7744303

Factory installation recommended.

Note: Various signal outputs are available for specific applications. Please contact ProMinent® for details.



1519/1

Makro-TZ

For the accurate registration of every pump stroke.

7744304

Operating principle as above. Power/output signal type is 2-Wire sinking or sourcing. Operates on 6-60 VDC.

Factory installation required.

Note: Various signal outputs are available for specific applications. Please contact ProMinent® for details.

High Flow Pump Accessories: Foot Valves


Description

Part No.

Foot valves

To be installed at the end of the suction line to improve priming and protect pump against coarse impurities. With strainer and ball check valve (must be mounted vertically for ball check function). Select material to be compatible with fluid.

Fig. 1

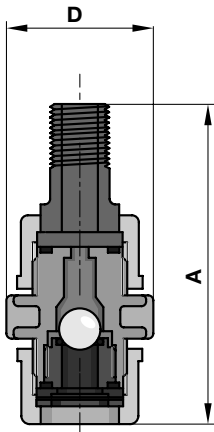

2165/4

Polypropylene (Fig. 1) - Valve body of PP, seals of EPDM (PP1)

Connection

1/2" MNPT (DN 10)
3/4" MNPT (DN 15)
3/4" MNPT (DN 20)
1" MNPT (DN 25)
1-1/2" MNPT (DN 40)

Dimensions inches (mm)

Dim "A"

Dim "D"

3-7/8 (98)	1-1/2 (38)	809465
4 (102)	1-3/4 (44)	924516
5 (127)	2-1/4 (57)	803721
5-1/4 (133)	2-1/2 (63)	803722
6-1/2 (165)	3-1/2 (89)	1004204

PVC (Fig. 1) - Valve body of PVC, seals of Viton® (NP1)

1/2" MNPT (DN 10)
3/4" MNPT (DN 15)
3/4" MNPT (DN 20)
1" MNPT (DN 25)
1-1/2" MNPT (DN 40)

3-7/8 (98)	1-1/2 (38)	809464
4 (102)	1-3/4 (44)	924515
5 (127)	2-1/4 (57)	803723
5-1/4 (133)	2-1/2 (63)	803724
6-1/2 (165)	3-1/2 (89)	1004193

PVDF/PTFE (Fig. 1) Valve body and seals of PTFE (TT1)


1/2" MNPT (DN 10)	(PTFE/PTFE)	3-7/8 (98)	1-3/8 (35)	809466
1/2" MNPT (DN 15)	(PVDF/PVDF)	3-7/8 (98)	1-3/8 (35)	7803720
3/4" MNPT (DN 15)	(PVDF/PVDF)	4-1/8 (105)	1-3/4 (44)	7803721
3/4" MNPT (DN 15)	(PTFE/PTFE)	4-1/8 (105)	1-3/4 (44)	924517
3/4" MNPT (DN 20)	(PTFE/PTFE)	4-3/4 (121)	2-1/4 (57)	803725
3/4" MNPT (DN 25)	(PVDF/PVDF)	4-3/4 (121)	2-1/4 (57)	7803722
1" MNPT (DN 25)	(PVDF/PVDF)	5-3/8 (137)	2-1/2 (63)	7803723
1" MNPT (DN 25)	(PTFE/PTFE)	5-3/8 (137)	2-1/2 (63)	803726
1-1/2" MNPT (DN 32)	(PVDF/PVDF)			1006434
1-1/2" MNPT (DN 40)	(PTFE/PTFE)	6-1/2 (165)	3-1/2 (89)	1004205

SS - Valve body of stainless steel, seals of PTFE

3/8" FNPT (DN 10)	2-3/4 (70)	1-1/2 (38)	809467
1/2" FNPT (DN 15)	3 (76)	1-3/4 (44)	924518
3/4" MNPT (DN 20)	4-1/2 (114)	2-1/8 (54)	803727
1" MNPT (DN 25)	5-1/8 (130)	2-1/2 (63)	803728
1-1/2" MNPT (DN 32)			1006435
1-1/2" MNPT (DN 40)	6-1/4 (159)	3-1/8 (79)	1004206
1/4" FNPT	2-3/4 (70)	1-1/2 (38)	803730
3/8" FNPT	2-3/4 (70)	1-1/2 (38)	803731

* See Figure 1, ** See Figure 2

Fig. 2

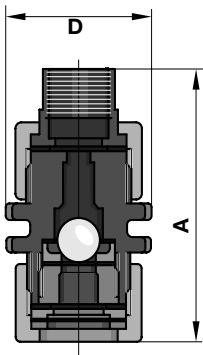

1521/4

High Flow Pump Accessories: Injection Valves

Description


Part No.

Injection valves

To connect the pump discharge line to the point of injection for installation in any position, except PTFE version without spring to be installed in a vertical position discharging upward. All valves except PTFE and Sigma/Meta/Makro HK have 7 psig (0.5 bar) Hastelloy-C spring.

Caution: Injection valves and injection lances should not be used as isolating elements or for antisiphon protection!

Fig. 1

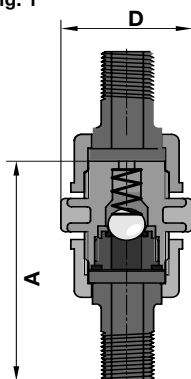

1447/4


Polypropylene (Fig. 1) Valve body of PP, seals of EPDM (PP1)

Connection	Dimensions inches (mm)				
	Dim "A"		Dim "D"		
1/2" MNPT (DN 10)	5-1/4	(133)	1-1/2	(38)	809461
3/4" MNPT (DN 15)	5-3/8	(137)	1-3/4	(44)	924521
3/4" MNPT (DN 20)	6-3/4	(171)	2-1/4	(57)	803710
1" MNPT (DN 25)	7-1/8	(181)	2-3/8	(60)	803711
1-1/2" MNPT (DN 40)	8-1/4	(210)	3-1/2	(89)	804761

PVC (Fig. 1) - Valve body of PVC, seals of Viton® (NP)

1/2" MNPT (DN 10)	5-3/8	(137)	1-1/2	(38)	809460
3/4" MNPT (DN 15)	5-3/8	(137)	1-5/8	(42)	924520
3/4" MNPT (DN 20)	6-3/4	(171)	2-1/4	(57)	803712
1" MNPT (DN 25)	7-1/8	(181)	2-3/8	(60)	803713
1-1/2" MNPT (DN 40)	8-1/4	(210)	3-1/2	(89)	804760

Fig. 2

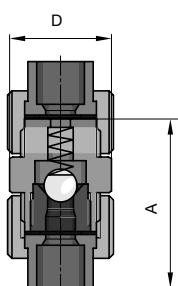

2405/4

PVDF/PTFE (Fig. 1) - Valve body and seals of PTFE (TT1)

1/2" MNPT (DN 10)	(PTFE/PTFE)	4-7/8	(124)	1-3/8	(35)	809462
1/2" MNPT (DN 15)	(PVDF/PVDF)	4-7/8	(124)	1-3/8	(35)	7803724
3/4" MNPT (DN 15)	(PVDF/PVDF)	5-1/2	(140)	1-3/4	(44)	7803725
3/4" MNPT (DN 15)	(PTFE/PTFE)	5-1/2	(140)	1-3/4	(44)	924522
3/4" MNPT (DN 20)	(PTFE/PTFE)	6-7/8	(175)	2-1/4	(57)	803714
3/4" MNPT (DN 25)	(PVDF/PVDF)	6-7/8	(175)	2-1/4	(57)	7803726
1" MNPT (DN 25)	(PVDF/PVDF)	7-1/4	(184)	2-1/2	(63)	7803727
1" MNPT (DN 25)	(PTFE/PTFE)	7-1/4	(184)	2-1/2	(63)	803715
1-1/2" MNPT (DN 32)	(PVDF/PVDF)					1002783
1-1/2" MNPT (DN 40)	(PTFE/PTFE)	8-1/4	(210)	3-1/2	(89)	804762


SS - Valve body of stainless steel, seals of PTFE

3/8" FNPT (DN 10)	3-1/8	(79)	1-3/8	(35)	809463
1/2" FNPT (DN 15)	3-1/2	(89)	1-3/4	(44)	924523
3/4" MNPT (DN 20)	6-1/2	(165)	2-1/8	(54)	803716
1" MNPT (DN 25)	7-1/4	(184)	2-1/2	(63)	803717
1-1/2" MNPT (DN 40)	8-1/4	(210)	3-1/8	(79)	804763
1-1/2" MNPT (DN 32)					1002801

High pressure valves for HK pumps (Fig. 3)

1/4" MNPT by 1/2" MNPT (DN 8)	4	(83)	1-5/8	(42)	803732
3/8" MNPT by 1/2" MNPT (DN 10)	4	(83)	1-5/8	(42)	803733

Fig. 3

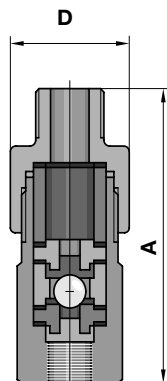

1239/4


High Flow Pump Accessories: Spare Connector Sets

Description

Part No.


Spare connector sets

The union nut and insert provide a half-union connection, allowing the pump to be easily removed from the piping system. The union nut clamps the threaded insert onto the pump's suction or discharge valve.




Union nut

1031/4

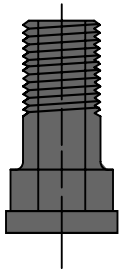


Threaded insert

1486/4



1/2"

Hose Barb



Pump	Union Nut Material	Threaded Insert Material	Union Nut Thread	Insert Thread	Union Nut Part No.	Threaded Insert Part No.
Vario	PP	PP	DN 10	1/2" MNPT	358613	7358630
Vario	PP	PP	DN 15	3/4" MNPT	358614	7358631
Meta/Makro	PP	PP	DN 20	3/4" MNPT	358615	7358603
Meta/Makro	PP	PP	DN 25	1" MNPT	358616	7358604
Meta/Makro	PP	PP	DN 40	1-1/2" MNPT	358618	7358611
Vario	PVC	PVC	DN 10	1/2" MNPT	356562	7358632
Vario	PVC	PVC	DN 15	3/4" MNPT	356563	7358633
Meta/Makro	PVC	PVC	DN 20	3/4" MNPT	356564	7358601
Meta/Makro	PVC	PVC	DN 25	1" MNPT	356565	7358602
Meta/Makro	PVC	PVC	DN 40	1-1/2" MNPT	356567	7358613
Vario/Hydro	PVDF	PTFE	DN 10	1/2" MNPT	358813	7358634
Vario/Hydro	PVDF	PTFE	DN 15	3/4" MNPT	358814	7358635
Meta/Makro	PVDF	PTFE	DN 20	3/4" MNPT	358815	7358607
Meta/Makro	PVDF	PTFE	DN 25	1" MNPT	358816	7358608
Meta/Makro	PVDF	PTFE	DN 40	1-1/2" MNPT	358818	7358615
Sigma	PVDF	PVDF	DN 10	1/2" MNPT	358813	1017379
Sigma	PVDF	PVDF	DN 15	1/2" MNPT	358814	7358641
Sigma	PVDF	PVDF	DN 15	3/4" MNPT	358814	7358642
Sigma	PVDF	PVDF	DN 20	3/4" MNPT	358815	1017381
Sigma	PVDF	PVDF	DN 25	3/4" MNPT	358816	7358645
Sigma	PVDF	PVDF	DN 25	1" MNPT	358816	7358644
Sigma/3	PVDF	PVDF	DN 32	1-1/2" MNPT	1003639	7358647
Vario/Hydro	SS	SS	DN 10	3/8" FNPT	805270	805285
Vario/Hydro/Sigma	SS	SS	DN 15	1/2" FNPT	805271	805286
Meta/Makro	SS	SS	DN 20	3/4" MNPT	805272	7358609
Sigma	SS	SS	DN 25	3/4" MNPT	805273	7358646
Meta/Makro/Sigma	SS	SS	DN 25	1" MNPT	805273	7358610
Sigma/3	SS	SS	DN 32	1-1/2" MNPT	805274	7358648
Meta/Makro	SS	SS	DN 40	1-1/2" MNPT	805275	7358617

Hose Barbs

Material (all 1/2" DN 10)

Part No.

PP	800657
PVC	800554
PTFE	811572
316 SS	810536

Material (all 3/4" DN 15)

PP	800655
PVC	811407
PTFE	811424
316 SS	810567

Tubing Adapters for HK Pump Valves

1/4" ISO 7/1 1/4" MNPT Hex Nipple (316 SS)	7740931
3/8" ISO 7/1 3/8" MNPT Hex Nipple (316 SS)	7744384

High Flow Pump Accessories: Backpressure and Pressure Relief Valves

Description

Part No.


Backpressure, antisiphon and pressure relief valves



In-line pressure
relief valve (3 port)



Backpressure
valve (2 port)



Backpressure valve on tee
for pressure relief

Technical data

Size:

1/2", 3/4", 1", 1-1/2" and 2" NPT

Diaphragm

Materials:

PTFE-faced EPDM

Liquid Handling

Materials:

PP, PVC, PTFE, PVDF
316 Stainless Steel

Pressure Adjustment:

0-150 psig (0-10.3 bar)

Flow rates @ 150 psig:

1/2" (PP, PVC) - 200 U.S. gph (757 L/h)
1/2" (PVDF, TT, SS) - 300 U.S. gph (1135 L/h)
3/4" - 300 U.S. gph (1135 L/h)
1" - 500 U.S. gph (1893 L/h)
1-1/2" - 900 U.S. gph (3407 L/h)
2" - 1200 U.S. gph (4542 L/h)

Max. Temperature:

PP - 195°F (90°C)
PVC - 140°F (60°C)
PTFE - 250°F (121°C)
PVDF - 250°F (121°C)
316 Stainless - 250°F (121°C)

Backpressure (2-port) valves may be used in-line to provide a constant discharge pressure for protection from siphoning, or they may be teed off of the discharge line for pressure relief, discharging back to the source tank or to the pump suction line to create a bypass.

Pressure relief (3-port) valves are mounted in the discharge line, featuring a separate relief port which discharges back to the source tank or to the pump suction line to create a bypass.

Backpressure valves provide several functions: they improve repeatability by providing a constant discharge pressure; they provide antisiphon protection for discharge into pressurized water lines or vacuums, or where suction head exceeds discharge head; and they minimize pulsation when used in conjunction with a pulsation dampener.

In-line backpressure/antisiphon and pressure relief valves

These adjustable backpressure (2-port) and pressure relief (3-port) valves have FNPT ports and require tubing adapters for use with flexible tubing.

Can be adjusted with screwdriver.

DIMENSIONS: 1/2" to 2" valves



D	A (in)	B (in)	C (in)
1/2"	4.9	2.6	1.2
*1/2"	*5.5	*3.5	*1.125
3/4"	5.4	3.5	1.1
1"	5.7	3.9	1.4
1-1/2"	8.5	4.6	2.2
2"	8.5	4.6	2.2

*Note: Dimensions apply to SS and PTFE valves only.

DIMENSIONS (for replacement valves only): 1/2" to 2" valves - SEE PG. 17

D	A (in)	B (in)	C (in)
1/2"	4.6	2.375	1.125
*1/2"	*5.5	*3.5	*1.125
3/4"	5.5	3.5	1.125
1"	5.8	3.5	1.25
1-1/2"	9.0	4.5	2.1
2"	9.0	5.0	2.1

*Note: Dimensions apply to SS, PVDF, and PTFE valves only.

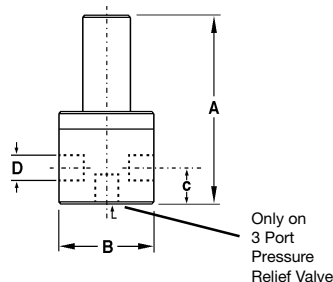

Adapter included with all backpressure/pressure relief valves. Optional use in the event of diaphragm failure.

High Flow Pump Accessories: Backpressure and Pressure Relief Valves

Description	Part No.
-------------	----------

Backpressure, antisiphon and pressure relief valves

1/2" FNPT valves

Material	Backpressure Valve (2-port)	Pressure Relief Valve (3-port)
PP	1006846	1006858
PVC	1006850	1006862
PVDF	1006854	1006866
316 SS	7302208	7302224

3/4" FNPT valves

Material	Backpressure Valve (2-port)	Pressure Relief Valve (3-port)
PP	1006847	1006859
PVC	1006851	1006863
PVDF	1006855	1006867
316 SS	7302212	7302228

1" FNPT valves

Material	Backpressure Valve (2-port)	Pressure Relief Valve (3-port)
PP	1006848	1006860
PVC	1006852	1006864
PVDF	1006856	1006868
316 SS	7302216	7302232

1-1/2" FNPT valves

Material	Backpressure Valve (2-port)	Pressure Relief Valve (2-port)
PP	1006849	1006861
PVC	1006853	1006865
PVDF	1006857	1006869
316 SS	7302243	7302261

2" FNPT valves

Material	Backpressure Valve (2-port)	Pressure Relief Valve (2-port)
PP	1009448	1009456
PVC	1009449	1009457
PVDF	1009450	1009458
316 SS	7302247	7302265

Spare diaphragms

3/4" - 1" valve PTFE/EPDM	1006814	1006814
1-1/2" - 2" valve PTFE/EPDM	1006815	1006815

High Flow Pump Accessories:

REPLACEMENT Backpressure and PR Valves

Description

Part No.

REPLACEMENT Backpressure, antisiphon and pressure relief valves

1/2" FNPT valves

Material	Backpressure Valve (2-port)	Pressure Relief Valve (3-port)
PP	7302506	7302507
PVC	7302504	7302505
PVDF	7302280	7302286
PTFE	7302207	7302223
316 SS	7302208	7302224

3/4" FNPT valves

Material	Backpressure Valve (2-port)	Pressure Relief Valve (3-port)
PP	7302210	7302226
PVC	7302209	7302225
PVDF	7302281	7302287
PTFE	7302211	7302227
316 SS	7302212	7302228

1" FNPT valves

Material	Backpressure Valve (2-port)	Pressure Relief Valve (3-port)
PP	7302214	7302230
PVC	7302213	7302229
PVDF	7302282	7302288
PTFE	7302215	7302231
316 SS	7302216	7302232

1-1/2" FNPT valves

Material	Backpressure Valve (2-port)	Pressure Relief Valve (2-port)
PP	7302241	7302249
PVC	7302240	7302248
PVDF	7302283	7302289
PTFE	7302242	7302260
316 SS	7302243	7302261

2" FNPT valves

Material	Backpressure Valve (2-port)	Pressure Relief Valve (2-port)
PP	7302245	7302263
PVC	7302244	7302262
PVDF	7302284	7302290
PTFE	7302246	7302264
316 SS	7302247	7302265

Spare diaphragms

1/2" - 1" valve PTFE/EPDM	7811403	7811403
1-1/2" - 2" valve PTFE/EPDM	7811405	7811405
Adjusting wrench (fits all valves)		7302200


High Flow Pump Accessories: Pressure Relief Valves

Description

Part No.

Pressure relief valves

High pressure relief valve, adjustable, 1/4" and 1/2" NPT for Sigma/Meta/ Makro HK/and Hydro pumps

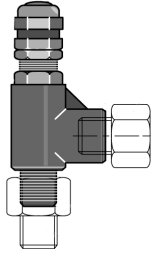

1112/4

Can also be used as a backpressure valve for < 30 gph (113 L/h).

These valves are without springs, which must be ordered separately.

Materials: Stainless steel/Viton®
Connection: 1/4" NPT male and female thread 7202505

Materials: Stainless steel/EPDM
Connection: 1/4" NPT male and female thread 7744507

Spring: psig (bar)	Color:	
50 - 350 (3.5 - 25)	blue	7202519
350 - 750 (25 - 50)	yellow	7202520
750 - 1500 (50 - 100)	violet	7202525
1500 - 2250 (100 - 155)	orange	7202524
2250 - 3000 (155 - 205)	brown	7202523
3000 - 4000 (205 - 275)	white	7202522
4000 - 5000 (275 - 340)	red	7202521

Materials: Stainless steel/Viton®
Connection: 1/2" NPT male and female thread 7744508

Materials: Stainless steel/EPDM
Connection: 1/2" NPT male and female thread 7744509

Spring: psig (bar)	Color:	
50 - 350 (3.5 - 25)	blue	7744510
350 - 750 (25 - 50)	yellow	7744511
750 - 1500 (50 - 100)	violet	7744512

High Flow Pump Accessories: Pulsation Dampeners

Description

Part No.

Pulsation dampeners

Pulsation dampeners operate on the principle that gas is compressible and fluid is not. The pulsation dampener consists of an air chamber containing compressed air, a fluid chamber connected to the pump's suction or discharge line, and a bladder or bellows which separates the air and fluid.

Some models are flow-through design, with two ports so they can be mounted directly on the pump suction or discharge line. Other models are single port design, to be teed off of the pump suction or discharge line. Flow-through models may also be used in a tee if one port is capped.

All models feature a Schrader (bicycle) valve and pressure gauge for charging the air chamber on-site.

Sizing Pulsation Dampeners



Multiply the pump's displacement per stroke (mL) times 26 to get minimum pulsation dampener volume (mL) to achieve 90% reduction in pulsation.

Safety Note: We recommend using pressure relief valves with pulsation dampeners.

General Specifications

Maximum pressure:	150 psig (polypro, PVDF and PTFE), 300 psig (SS)
Temperature range:	
Nordel bladder:	-60°F to 280°F (-51°C to 138°C)
Viton® bladder:	30°F to 350°F (-1°C to 177°C)
HYPALON® bladder:	-20°F to 275°F (-29°C to 135°C)
PTFE bellows:	40°F to 220°F (4°C to 104°C)
Polypro housing :	32°F to 175°F (0°C to 79°C)
PVC housing:	32°F to 140°F (0°C to 60°C)
PVDF housing:	10°F to 250°F (-12°C to 121°C)
PTFE housing:	-20°F to 125°F (-29°C to 52°C)
SS housing:	32°F to 200°F (0°C to 93°C)

*Teflon bellows are smaller in volume

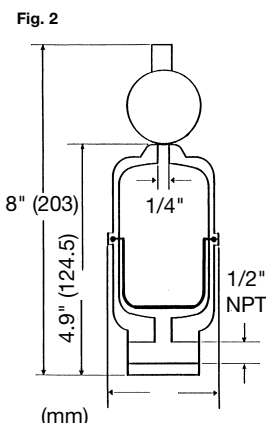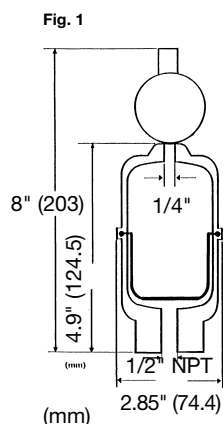

131 mL (8 cu. in.) Models

SS housing: 3/8" FNPT, 1 port (not illustrated)				
PTFE bellows	3 (1.4)	CTS1020 T	III	7253205
PVDF housing: 1/2" FNPT, 1 port (Fig. 1)				
PTFE bellows	1 (0.9)	CTK1005 T 5	III	7744101

164 mL (10 cu. in.) Models

PVC housing: 1/2" FNPT, 1 port (Fig. 1)				
Nordel bladder (EPDM)	1 (0.9)	CTP1015 ND 5	III	7744096
Viton® bladder	1 (0.9)	CTP1015 V 5	III	7744097
HYPALON® bladder	1 (0.9)	CTP1015 H 5	III	7744098
Polypro housing: 1/2" FNPT, 1 port (Fig. 1)				
Nordel bladder (EPDM)	1 (0.9)	CTP1005 ND 5	III	7744102
PVDF housing: 1/2" FNPT, 1 port (Fig. 1)				
Nordel bladder (EPDM)	1 (0.9)	CTK1005 ND 5	III	7744100
Viton® bladder	1 (0.9)	CTK1005 V 5	III	7744099

131 mL (8 cu. in.) Models

PVDF housing: 1/2" FNPT, 2 port (Fig. 2)				
PTFE bellows	1 (0.9)	CTK1000 T	III	7253217

164 mL (10 cu. in.) Models

PVC housing: 1/2" FNPT, 2 port (Fig. 2)				
Viton® bladder	1 (0.9)	CTP1010 V	III	7253216
HYPALON® bladder	1 (0.9)	CTP1010 H	III	7740945
Polypro housing: 1/2" FNPT, 2 port (Fig. 2)				
Nordel bladder (EPDM)	1 (0.9)	CTP1000 ND	III	7253201
PVDF housing: 1/2" FNPT, 2 port (Fig. 2)				
Nordel bladder (EPDM)	1 (0.9)	CTK1000 ND	III	7253203
Viton® bladder	1 (0.9)	CTK1000 V	III	7253204


High Flow Pump Accessories: Pulsation Dampeners

Description

Part No.

Pulsation dampeners (cont.)

Fig. 3

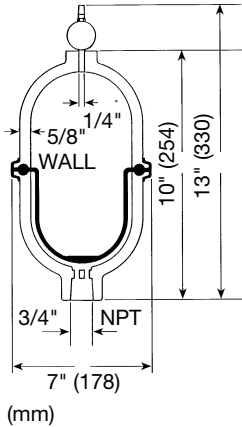

262 mL (16 cu. in.) Models

PVC housing: 3/4" FNPT, 1 port (Fig. 3)				
PTFE bellows	7 (3.2)	CT1311 T	II	7744211
PVDF housing: 3/4" FNPT, 1 port (Fig. 3)				
PTFE bellows	7 (3.2)	CT1401 T	II	7253234
SS housing: 3/4" FNPT, 1 port (Fig. 3)				
PTFE bellows	11 (5.0)	CT3120 T	II	7253237

600 mL (36 cu. in.) Models (cont. from pg.15)

PVC housing: 3/4" FNPT, 1 port (Fig. 3)				
Nordel bladder	7 (3.2)	CT1311 ND	II	7253232
Viton® bladder	7 (3.2)	CT1311 V	II	7253233
HYPALON® bladder	7 (3.2)	CT1311 H	II	7740946
Polypro housing: 3/4" FNPT, 1 port (Fig. 3)				
Nordel bladder	6 (2.7)	CT1301 ND	II	7253230
Viton® bladder	6 (2.7)	CT1301 V	II	7253231
PVDF housing: 3/4" FNPT, 1 port (Fig. 3)				
Nordel bladder	7 (3.2)	CT1401 ND	II	7253236
Viton® bladder	7 (3.2)	CT1401 V	II	7253235
SS housing: 3/4" FNPT, 1 port (Fig. 3)				
Viton® bladder	11 (5.0)	CT3120 V	II	7253238

1147 mL (70 cu. in.) Models

PVC housing: 3/4" FNPT, 1 port (Fig. 3)				
PTFE bellows	10 (4.5)	CT311 T	II	7253229
SS housing: 3/4" FNPT, 1 port (Fig. 3)				
PTFE bellows	14 (6.4)	CT3020 T	II	7253206
PVDF housing: 3/4" FNPT, 1 port (Fig. 3)				
PTFE bellows	8 (3.6)	CT401 T	II	7253219

1393 mL (85 cu. in.) Models

PVC housing: 3/4" FNPT, 1 port (Fig. 3)				
Nordel bladder	6 (2.7)	CT311 ND	II	7253221
Viton® bladder	6 (2.7)	CT311 V	II	7253220
HYPALON® bladder	6 (2.7)	CT311 H	II	7740947
Polypro housing: 3/4" FNPT, 1 port (Fig. 3)				
Nordel bladder (EPDM)	6 (2.7)	CT301 ND	II	7253207
Viton® bladder	6 (2.7)	CT301 V	II	7253208
PVDF housing: 3/4" FNPT, 1 port (Fig. 3)				
Nordel bladder (EPDM)	7 (3.2)	CT401 ND	II	7253209
Viton® bladder	8 (3.6)	CT401 V	II	7253210

1998 mL (122 cu. in.) Models

PVC housing: 2" FNPT, 1 port				
PTFE bellows	16 (7.3)	CT911 T	I	7253228
PVDF housing: 2" FNPT, 1 port				
PTFE bellows	15 (6.8)	CT1201 T	I	7253225
SS housing: 2" FNPT, 1 port				
PTFE bellows	30 (13.6)	CT2520 T	I	7253226


2867 mL (175 cu. in.) Models

Polypro housing: 2" FNPT, 1 port				
Nordel bladder	13 (5.9)	CT901 ND	I	7253223
PVC housing: 2" FNPT, 1 port				
Viton® bladder	13 (5.9)	CT911 V	I	7253224
HYPALON® bladder	13 (5.9)	CT911 H	I	7740948

High Flow Pump Accessories: Pulsation Dampeners

Description	Part No.
Pulsation dampeners (cont.)	

Fig. 4

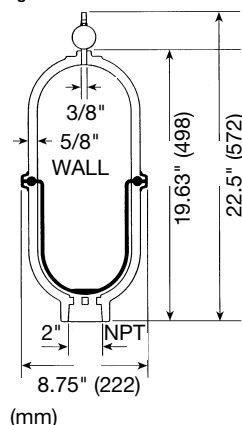

5822 mL (355 cu. in.) Models

PVC housing: 2" FNPT, 1 port				
PTFE bellows	18 (8.2)	CT111 T	I	7253227
PVDF housing: 2" FNPT, 1 port				
PTFE bellows	21 (9.5)	CT201 T	I	7253215
SS housing: 2" FNPT, 1 port (Fig. 4)				
PTFE bellows	40 (18.1)	CT2400 T	I	7253211

6063 mL (370 cu. in.) Models

PVC housing: 2" FNPT, 1 port (Fig. 4)				
Nordel bladder	16 (7.3)	CT111 ND	I	7253222
Viton® bladder	16 (7.3)	CT111 V	I	7253218
HYPALON® bladder	16 (7.3)	CT111 H	I	7740949
Polypro housing: 2" FNPT, 1 port (Fig. 4)				
Nordel bladder (EPDM)	15 (6.8)	CT101 ND	I	7253212
Viton® bladder	15 (6.8)	CT101 V	I	7253213
PVDF housing: 2" FNPT, 1 port (Fig. 4)				
Nordel bladder (EPDM)	18 (8.2)	CT201 ND	I	7253214

Note: Other sizes and materials available upon request.

High pressure pulsation dampeners for Hydro pumps only.

	Model	Size	Part No.
66 mL (4 cu. in.) Models			
Hastelloy C housing: 3/8" FNPT, 1 port (not illustrated)			
Santoprene® bladder	H1180 W	III	7744378
Viton® bladder	H1180 V	III	7744381
316 Stainless Steel housing: 3/8" FNPT, 1 port (not illustrated)			
Nordel bladder (EPDM)	H1120 ND	III	7744387
164 mL (10 cu. in.) Models			
Hastelloy C housing: 3/8" FNPT, 1 port (not illustrated)			
Santoprene® bladder	H1080 W	III	7744379
Viton® bladder	H1080 V	III	7744382
316 Stainless Steel housing: 3/8" FNPT, 1 port (not illustrated)			
Nordel bladder (EPDM)	H1020 ND	III	7744388
197 mL (12 cu. in.) Models			
316 Stainless Steel housing: 3/8" FNPT, 1 port (not illustrated)			
PTFE bellows	TG12SST	II	7744377
600 mL (36 cu. in.) Models			
Hastelloy C housing: 3/4" FNPT, 1 port (not illustrated)			
Hypalon bladder	H3180 H	II	7744380
Viton® bladder	H3180 V	II	7744383
316 Stainless Steel housing: 3/8" FNPT, 1 port (not illustrated)			
Nordel bladder (EPDM)	H3120 ND	II	7744389

High Flow Pump Accessories: Spare Bladders/Bellows & Inlet Stabilizers

Description	Part No.
-------------	----------

Spare bladders/bellows

	<u>Model</u>	<u>Size</u>	<u>Part No.</u>
Nordel (EPDM) bladders	1000-28	III	7740208
	401-28	II	7740202
	201-28	I	7740205
Viton bladders	1000-31	III	7740209
	401-25	II	7740203
	201-25	I	7740206
Hypalon bladders	1000-30	III	7740959
	401-30	II	7740960
	201-30	I	7740961
PTFE bellows	301-10	II	7740204
	101-10	I	7740207

High pressure charging hose

Charging hose consists of an 8 foot (2.4 m) length of 5000 psi hose with a 1/4" NPT (M) fitting at one end, for connection to a nitrogen bottle regulator and a charging adapter with purge valve and gauge at the other end.

	<u>Model</u>	<u>Part No.</u>
1/4" air inlet and 1/8" fill valve	701-00	7744376

Inlet stabilizers

An inlet stabilizer will improve flow conditions to the inlet side of a pump and protect and extend the service life of all inlet system components. Inlet stabilizers must be mounted as close to the pump's inlet connection as possible, and no more than 10 pipe diameters away. All units include a 30-0-30 vacuum/pressure gauge, air venturi, and ball valve for charging bladder chamber. Units must be sized similar to pulsation dampeners, i.e. $26 \times (\text{mL/stroke}) = \text{minimum required inlet stabilizer volume}$. **Note:** Requires a compressed air supply be available for initial bladder charging and periodic readjustment as necessary.

	<u>Model</u>	<u>Size</u>	<u>Part No.</u>
1393 mL (85 cu. in.) Models (for 3/4" models)			
PVC housing:			
Viton® bladder	J3111V	II	7740859
HYPALON® bladder	J3111H	II	7744305
Nordel bladder (EPDM)	J3111ND	II	7744306
PVDF housing:			
Viton® bladder	J401V	II	7740860
6063 mL (370 cu. in.) Models (for 2" models)			
PVC housing:			
Viton® bladder	J1111V	I	7744307
HYPALON® bladder	J1111H	I	7744308
Nordel bladder (EPDM)	J1111ND	I	7744309
PVDF housing:			
Viton® bladder	J201V	I	7744310

Materials shown are in contact with process fluid.
Other material and sizes are available. Please consult factory.

High Flow Pump Accessories: Calibration Columns


Description

Part No.

Calibration columns

Clear PVC calibration columns


Cylinder size	Fitting size	Dimension (inches)		Threaded base, removable top	Threaded both ends
		A	B		
100 mL	1/2" NPT	10.75	1.39	7500137	7500127
250 mL	1/2" NPT	11.51	1.89	7350138	7500128
500 mL	1/2" NPT	12.75	2.39	7350139	7500129
1000 mL	1/2" NPT	16.75	2.77	7350130	7500135
2000 mL	1" FNPT	20.67	3.52	7500140	7500131
4000 mL	1" FNPT	22.66	4.52	7500141	7500132
10,000 mL	2" FNPT	23.16	6.91	7500134	7500133
20,000 mL	2" FNPT	42.69	6.91	7500142	7500136

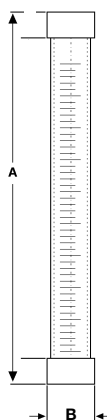

Typical Application of Calibration Columns


Column w/removable top

Note: Top must be removed during calibration




Column threaded both ends

Note: If plumbed as shown, a vent hole must be drilled into the top of the calibration column



Borosilicate Glass calibration columns with Viton® seals for Sulfuric Acid Applications

Glass cylinder with acrylic outer shield and 1/2" (316 SS) or 3/4" (PVDF, PVC) thick end flanges. All cylinders are bolted together using stainless steel rods with Viton O-rings for the glass seal and Buna N O-rings for the acrylic seal.

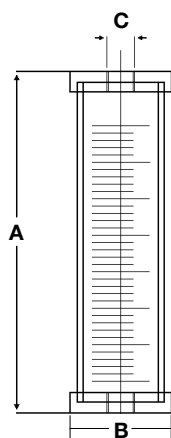


Cylinder size	Fitting size	Dimensions (inches)			Part No.
		A	B	C	
100 mL	1/2" CPVC	10.0	3.0	1/2	7500151
100 mL	1/2" PVDF	10.0	3.0	1/2	7500152
100 mL	1/2" SS	9.5	3.0	1/2	7500153
250 mL	1/2" CPVC	12.5	3.5	1/2	7500154
250 mL	1/2" PVDF	12.5	3.5	1/2	7500155
250 mL	1/2" SS	12.0	3.5	1/2	7500156
500 mL	1/2" CPVC	14.5	4.0	1/2	7500157
500 mL	1/2" PVDF	14.5	4.0	1/2	7500158
500 mL	1/2" SS	14.0	4.0	1/2	7500159
1000 mL	1/2" CPVC	16.75	4.75	1/2	7500160
1000 mL	1/2" PVDF	16.75	4.75	1/2	7500161
1000 mL	1/2" SS	16.25	4.75	1/2	7500162
2000 mL	1" CPVC	18.75	5.5	1	7500163
2000 mL	1" PVDF	18.75	5.5	1	7500164
2000 mL	1" SS	18.25	5.5	1	7500165
4000 mL	1" CPVC	22.5	6.5	1	7500166
4000 mL	1" PVDF	22.5	6.5	1	7500167
4000 mL	1" SS	22.0	6.5	1	7500168

High Flow Pump Accessories: Chemical Tanks and Accessories

Description

Part No.

Chemical tanks

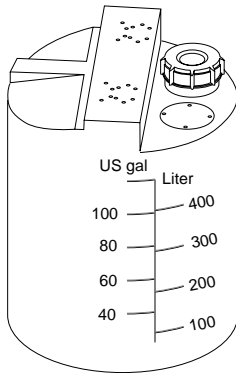

15, 26, 66, 132 gallon capacity

Made of translucent UV-stabilized polyethylene, with gallon/litre scale, screw cap. Mounting platforms for ProMinent metering pumps and mixers. All tanks are specifically developed to maximize toughness. These tanks are impact, stress, and chemical resistant. Maximum allowable temperature 180°F (82°C). Tank opening (screw cap) diameter for 15 - 132 gal.: 6.5". Tank opening (screw cap) diameter for 220 and 300 gal.: 5-1/4".

Capacity		O.D.		Height		Empty Weight		
gallon	(litre)	in.	(mm)	in.	(mm)	lb.	(kg)	
15	(60)	16	(410)	23	(590)	11	(5.0)	791994
26	(100)	20	(500)	30	(760)	17	(7.7)	1001490
66	(250)	24	(600)	43	(1100)	39	(17.5)	791996
132*	(500)	32	(820)	47	(1190)	54	(24.5)	791997
220	(830)	42	(1067)	41	(1041)	55	(25.0)	7809688
300	(1100)	43	(1092)	59	(1499)	70	(31.7)	7809687


* Limited supply available.

Note: Other size tanks available upon request. Color tanks are available in red, blue, yellow or black at an additional cost.

Accessories

Lock and key for screw-on cap

200683

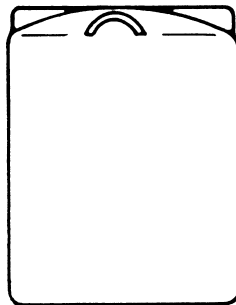


220 & 300 gallon capacity

The 66 and 132 gallon models hold a Vario or Sigma pump. The 132 gallon model can fit two pumps.

High Flow Pump Accessories: Chemical Tanks and Accessories

Description	Part No.
-------------	----------

PVC tank drain fitting with plug



1077/4

1/2" FNPT as an additional connection for chemical tanks.

To be used as an open drain with plug or for addition of optional 1/2" ball valve fitting. Fits 1" opening.

PVC with Viton® seal

7809755

PVC with EPDM seal

7744374

3/4" FNPT as an additional connection for chemical tanks.


To be used as an open drain with plug or for addition of optional 3/4" ball valve fitting. Fits 1-3/8" opening.

PVC with Viton® seal

7000300

PVC with EPDM seal

7744375



2424/4

PVC ball valve

1/2" PVC ball valve with 1/2" FNPT connections for all chemical tanks with 1/2" PVC tank drain fittings.

PVC with Viton® seal

7000309

PVC with EPDM seal

7000311

3/4" PVC ball valve with 3/4" FNPT connections for all chemical tanks with 3/4" PVC tank drain fittings.

PVC with Viton® seal

7741668

PVC with EPDM seal


7741485

High Flow Pump Accessories: Mixers

Description	Part No.
-------------	----------

U.S. Mixers

Fig. 1

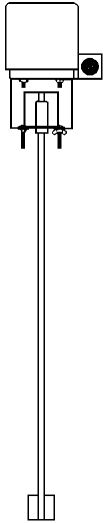

Electric mixers

Note: with any tank-mounted mixer, the inertia of fluid rotating in a polyethylene tank may cause the tank to move when the fluid level is low. Provision should be made to anchor the tank or to automatically shut the mixer off when the fluid level is low. **For U.S. only. For Canada mixers, see below.**

High speed mixer for water-like fluids in 15, 26 or 66 U.S. gallon tanks (Fig. 1):

Motor: 1/20 HP, 1550/1725 RPM, 115 VAC, 60 Hz, 1 ph., TEFC, with 8' Type SJ power cord, no on/off switch.

Shaft: 316 SS shaft/impeller (epoxy coated)

Mount: Four hole mounting flange with bolt holes, set at 5° angle for mounting directly on tank top.

Accessories: 1" diameter PVC metering pump suction pipe with bulkhead fitting for mounting to tank top.

Shipping weight: 9 lbs. (4 kg)

For 26 gallon tank (19" shaft)

7818588

For 66 gallon tank (34" shaft)

7818589


Shaft only (19" replacement)

7818590

Shaft only (34" replacement)

7818591

Fig. 2



High speed mixer for water-like fluids in 132 to 300 gallon tanks (Fig. 2):

Motor: 1/4 HP, 1725 RPM, 115/230 VAC, 60 Hz, TEFC. Power cord not included.

Shaft: 316 SS shaft/propeller. Shaft length: 36" (may be cut down for smaller tanks)

Mount: Bracket with bolt holes, for mounting directly on tank top.

Shipping weight: 27 lbs. (12 kg)

7818592

Shaft only (36" replacement)

7744506

Slow speed mixer for water-like fluids in 15, 26 Or 66 gallon tanks:

Motor: 1/3 HP, 60 RPM, 115 VAC, 50/60 Hz, 1 ph., TEFC. Power cord not included.

Shaft: 316 SS shaft w/ 1 set of impellers. Shaft length is 44" (may be cut).

Mount: Bracket w/ 4 bolt holes for mounting directly on tank top.

Shipping weight: 32 lbs.

7818594

Note: Motor not thermally protected.

Mixer mounting kit for 15 gallon tanks:

Polyethylene flange adapter for mounting mixers to metric flange. Includes all necessary hardware.

7744385

Mixer mounting kit for 26, 66, and 132 gallon tanks:

Polyethylene flange adapter for mounting mixers to metric flange. Includes all necessary hardware.

7744319

*(Other mixers available upon request)

Canada Mixers

High speed mixer for water-like fluids in 15, 26 or 66 gallon tanks:

Motor: 1/20 HP

Mount: includes mounting bracket

Shaft: 316 SS shaft and propeller

7356679

High speed mixer for water-like fluids in 132 to 300 gallon tanks:

Motor: 1/4 HP

Mount: includes PVC mounting flange

Shaft: 316 SS shaft and propeller

7818565

Note: Both mixers for Canada only.

Tank Mixer Selection Worksheet

Tank Size: ____ Gals (L) Diameter: ____ in / ft (mm/m) Height: ____ in / ft (mm/m)

L ____ x W ____ x H ____ in / ft (mm/m) (if rectangular)

Tank Material: _____ Top: ____ Closed ____ Open with cover: Y N

Tank Manufacturer: _____

Chemical: _____ Concentration: _____

Temperature: ____ F / C Viscosity: _____

Motor Voltage: _____ AC / DC 1 phase / 3 phase Horsepower: _____

Mounting Requirements:

Flange: ____ Size: ____ Bolt Circle: _____

Clamp-on: ____ Tank Side ____ Mounting Bracket _____

Bolt-on: ____ Details _____

Shaft Material: ____ Stainless Steel ____ Steel ____ Coated ____


Mixer Type/Diameter: ____ Propeller ____ Impeller ____ Other _____

High Flow Pump Accessories: Suction Assemblies

Description

Part No.

Suction assemblies

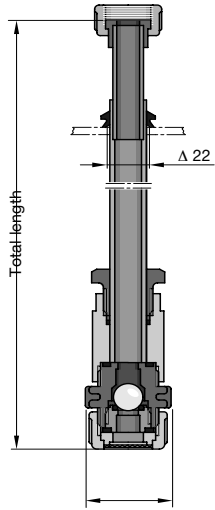

Note: This fitting is a compression fitting, pipe can be cut to desired length.

2801/3

PP without float switch


Size of connection

		Max. tank size gallons (litres)	Max. length inches (mm)	
PP-DN 10 - 1/2"	Vario/Hydro/Sigma	220 (830)	up to 52"(1320)	790389
PP-DN 15 - 3/4"	Vario/Hydro/Sigma	220 (830)	up to 52"(1320)	790394
PP-DN 20 - 3/4"	Meta/Makro	220 (830)	up to 52"(1320)	790395
PP-DN 25 - 1"	Meta/Makro/Sigma	220 (830)	up to 52"(1320)	790396
PP-DN 32 - 1-1/2"	Sigma	-	-	1005524

PVC without float switch

Size of connection

		Max. tank size gallons (litres)	Max. length inches (mm)	
PVC-DN 10 - 1/2"	Vario/Hydro/Sigma	220 (830)	up to 52"(1320)	790387
PVC-DN 15 - 3/4"	Vario/Hydro/Sigma	220 (830)	up to 52"(1320)	790391
PVC-DN 20 - 3/4"	Meta/Makro	220 (830)	up to 52"(1320)	790392
PVC-DN 25 - 1"	Meta/Makro/Sigma	220 (830)	up to 52"(1320)	790393
PVC-DN 32 - 1-1/2"	Sigma	-	-	1005525

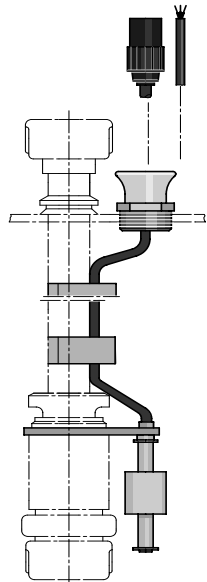

2803/3

Float switch for rigid suction assemblies

PP, two-stage with round connector for Vario/SICa pumps

The float switch set can be ordered together with the suction assemblies 1/2" and 3/4".

3-pole round connector	10 ft. (3 m) cable	790321
------------------------	--------------------	--------

PVC, two-stage with round connector for Vario/SICa pumps


The float switch set can be ordered together with the suction assemblies 1/2" and 3/4".

3-pole round connector	10 ft. (3 m) cable	790318
------------------------	--------------------	--------

High Flow Pump Accessories: Float Switches

Description	Part No.
-------------	----------

Float switches, two stage for Vario/Sigma Control pumps

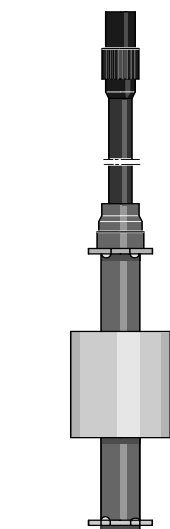

Float switch, two-stage (includes ceramic weight - do not use ceramic weight for fluoride service)

To monitor the fluid level in the chemical tank. Two-stage function, first stage is early warning annunciation, second stage will shut down pump after an additional drop in the fluid level of approximately 1.2" (30 mm).

With 3-pole round connector, suitable for direct connection to ProMinent Vario series.


Technical data:

Max. contact load 60 V, 0.3 A, 5 W/5 VA, temperature range -13°F to 167°F (-25°C to 75°C).

Materials:

PP body, foamed PP float 7/8" (21 mm) dia., PE cable			
PP with 3-pole round connector	cable length	6 ft. (2 m)	7142093
		15 ft. (5 m)	7142095
PVC body, foamed PP float 7/8" (21 mm) dia., PE cable			
PVC with 3-pole round connector	cable length	6 ft. (2 m)	7142043
		15 ft. (5 m)	7142038
PVDF body, foamed PVDF float 1" (25 mm) dia., PE cable			
PVDF with 3-pole round connector	cable length	6 ft. (2 m)	7142006
		15 ft. (5 m)	7142007

Float switches, single stage for Meta/Makro/Sigma basic pumps

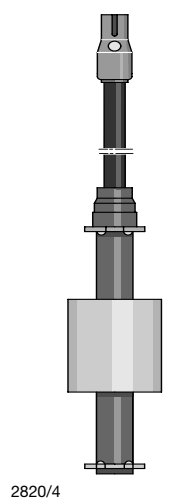

Float switch, single-stage (includes ceramic weight - do not use ceramic weight for fluoride service)

For minimum level indication in source tank. May be used to stop pump at motor starter or variable speed drive, or trigger alarm. May be used with relay combination.


Technical data:

Max. contact load 60 V, 0.3 A, 5 W/5 VA, temperature range -13°F to 167°F (-25°C to 75°C).

Materials:

PP body, foamed PP float 7/8" (21 mm) dia., PE cable			
PP with 2 loose cable ends	cable length	15 ft. (5 m)	790412
PVC body, foamed PP float 7/8" (21 mm) dia., PE cable			
PVC with flat connector	cable length	15 ft. (5 m)	790468
PVDF body, PVDF float 1" (25 mm) dia., PE cable			
PVDF with flat connector	cable length	15 ft. (5 m)	790472

Float switch weights



PVC weight

For bottom of foot valve for fluoride applications.

7404007


For fluoride, (hydrofluosilicic acid) or when plastic is required to replace standard ceramic weight.

High Flow Pump Accessories: Diaphragm-failure Detector, Signal Horn, Mountings

Description

Part No.

Diaphragm-failure detector

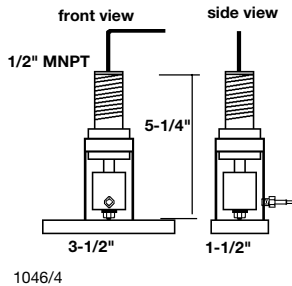

To trip an alarm and/or switch the metering pump off in case of diaphragm failure. In a failure, fluid drains out a weep hole in the backplate, through a tube to the detector column. The float switch in the column trips with 10 mL of fluid. Comprising a float switch PVC/PE, clear PVC column, tube connectors and 1 foot (0.3m) of clear PVC flexible tubing to connect to pump. Switch closure, max. contact rating 60 VAC, 300 mA, 5 W.

1/2" MNPT conduit connection. Shipped with loose ends on cable.

N/O
N/C

7803640
7803650

For processing the alarm signal from the level switch we recommend the relay combination Part No. 914769.5 with wall-mounted plastic housing and 2 change-over relays. Or, the signal could actuate the remote pause feature on the Vario pumps or could stop a Meta or Makro pump if wired into the motor starter or variable speed drive.

Signal horn and strobe light



Signal Horn

115 V, 60 Hz, 95 dB, NEMA 4X (IP 65) (e.g. for use in conjunction with fault annunciating relay or float switch or diaphragm failure detector).

7705004




Amber signal strobe light

115 V, 60 Hz, NEMA 4X (IP 65) (e.g. for use in conjunction with fault annunciating relay or float switch or diaphragm failure detector).

7914785


Mountings for Vario, Sigma and Meta

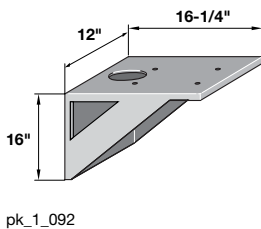

Wall-mounting bracket for Vario, Sigma and Meta

Polypro wall bracket mounts pumps so that diaphragm is parallel to the wall.

7803799

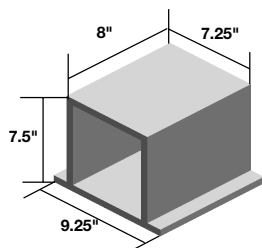

Floor mount pump stand

Polypro floor mounting bracket.


7740126

High Flow Pump Accessories: Relay Combination, Contact Repeater

Description

Part No.

Switchgear



1098/4

Relay combination

In wall-mounted plastic housing. To be used as a lack-of-chemical relay and/or a diaphragm-failure relay, or as a pulse repeater, e.g. to connect one water meter contact with two different receiving devices. With two single-pole double-throw relays, voltage-free, max. contact rating 250 V, 1 A. May also be used to start a light inductive load, e.g. transfer pump, using pump relay.

Function: Standard function when either contacts K1 or K2 are closed, both relays 1 and 2 pull in.

Power supply 115 V, 50-60 Hz

914769

Power supply 230 V, 50-60 Hz

914768

Options 1 to 6 with additional reed relay, contact rating 24 V = 50 mA, and 4-pole double-throw DIL switch.

818758

Option 1:

When contact K1 is closed - relay 1 drops out

When contact K2 is closed - relay 2 drops out

Option 2:

When contact K1 is closed - relay 1 pulls in

When contact K2 is closed - relay 2 pulls in

Option 3:

When contact K1 is closed - relay 1 pulls in

When contact K2 is closed - relays 1 and 2 pull in

Option 4:

When contact K1 is closed - relays 1 and 2 pull in


When contact K2 is closed - relay 2 pulls in

Option 5:

When contact K1 or K2 is closed - relay 3 pulls in

Option 6:

When contact K1 or K2 is open - relay 3 pulls in

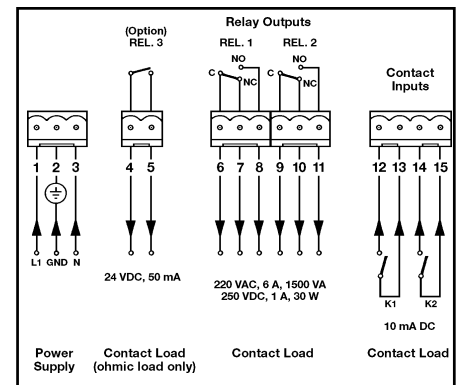


Power cord, 6 ft. (2 m) 115 V plug

7724003

Power cord, 6 ft. (2 m) 230 V plug (NEMA 6-15P configuration)

7724015

Contact repeater, 4-fold



2139/4

Contact repeater with 4 reed relays to externally pace up to 4 metering pumps or totalizing counters off one input, e.g. water meter. (Optional for Vario and SiCa. Not to be used with Meta or Makro).

Plastic snap-in housing for wall mounting (no enclosure).

Power supply 115 V, 50-60 Hz

Contact rating max. 250 V, 2 A


Dimensions 4-2/5" x 3" x 4-1/2" (112 mm x 76 mm x 114 mm) w x h x d

914753

High Flow Pump Accessories: Universal Switchover Box

Description	Part No.
Two Pump Universal Switchover Box	

Automatic backup protection for ProMinent® microprocessor based electronic metering pumps. Accepts Manual, 4-20 mA Analog, or External contact modes of operation, and can switch operation back and forth between two metering pumps based on an external dry contact opening and closure. Pumps must be equipped with an alarm relay output. The unit is equipped with a 120 VAC power cord and a weatherproof duplex receptacle for metering pumps power. Specify control mode of metering pumps when ordering (i.e. Remote 4-20 mA analog Pacing or Water Meter Contact Pacing).

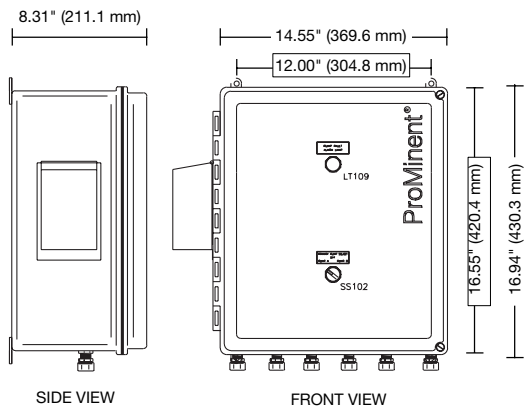

7951130

High Flow Pump Accessories: Pulse-type Water Meters – GPH scale


Description

Part No.

Pulse-type water meters for potable water

Contact water meter – US GPH

max. operation temperature 104° F.




1137/4

Pipe Coupl. Size in.	Min. Flow Rate in			Max. Flow Rate in			Press. Loss Max. Flow Rate		
	GPM	GPH	(L/h)	GPM	GPH	(L/h)	psig	(bar)	
3/4"	0.5	30	(113)	20	1200	(4542)	14.5	(1)	7304501
1"	0.6	36	(136)	50	3000	(11356)	14.5	(1)	7304517
1-1/2"	1.0	60	(227)	100	6000	(22712)	14.5	(1)	7304503
2"	2.0	120	(454)	130	7800	(29526)	14.5	(1)	7304504

Note: Price includes two screw fittings.

*Please specify pulse rate desired




1139/4

Screw fittings in brass with packing for water meters (price per unit)

3/4"	7359021
1"	7359022
1-1/2"	7359023
2"	7359024

Contact water meter – US GPH, 3"...6" flanged

max. operation temperature 104°F.



1138/4

Min. Flow Rate in			Max. Thru-Put		Pipe Flange Size	Install. Length	Standard Gallon/ Pulse	Weight	
GPM	GPH	(L/h)	GPM	GPH	in.	in.		lb. (kg)	
2.6	156	(590)	650	39000	3" ASA	9" (225 mm)	10	42 (19)	7304512
4	240	(908)	1100	66000	4" ASA	10" (251 mm)	10	51 (23)	7304513
11	660	(2498)	1875	112500	6" ASA	12" (298 mm)	25	89 (40)	7304514

Pulse rates

		Cold	Hot
3/4"	P/G	1, 2, 4, 10, 20, 40	1, 2, 4, 8
1"	P/G	1, 2, 4, 10, 20, 40	1, 2, 4, 8
1-1/2"	P/G	1, 2, 4, 10, 20, 40	1, 2
2"	P/G	1, 2, 4, 10, 20, 40	1, 2
3"	G/P	100, 1,000	
4"	G/P	100, 1,000	
6"	G/P	1,000, 10,000	


Note: P/G = pulses per gallon
G/P = gallons per pulse

High Flow Pump Accessories: Pulse-type Water Meters – GPH Scale

Description	Part No.
-------------	----------

Contact water meter – US GPH

Warm water up to 248° F



1137/4

Pipe Coupl. Size in.	Min. Flow Rate in			Max. Flow Rate in			Press. Loss Max. Flow Rate		
	GPM	GPH	(L/h)	GPM	GPH	(L/h)	psig	(bar)	
3/4"	0.5	30	(113)	20	1200	(4542)	14.5	(1)	7304480
1"	0.6	36	(136)	50	3000	(11356)	14.5	(1)	7304483
1-1/2"	1.0	60	(227)	100	6000	(22712)	14.5	(1)	7304484

Note: Price includes two screw fittings.

*Please specify pulse per gallon rate desired.

High Flow Pump Accessories:


Pulse-type Water Meters – LPH Scale

Description

Part No.

Pulse-type water meters, 3/4"...2" NPT fittings – litre readout

Max. working temperature 40°C, max. contact load 100 mA, 24 V

Max. flow rate = Q_{max} , nominal flow rate = Q_n


1137/4

$Q_{max} = Q_n$ NG = Nominal size (m³/h)	Connections in.	Overall length w/o unions mm	Standard K factor	
5	3/4"	190 mm (7.5")	1	304434
10	1"	260 mm (10.2")	1.5	304435
20	1-1/2"	300 mm (11.8")	2	304436
30	2"	270 mm (10.6")	4	304438

Note: Price includes two screw fittings.


*Please specify pulse rate desired

Other pulse rates available (no. of litres per pulse out)

.05	1	5	40	300
.1	1.5	10	50	400
.25	2	15	100	500
.3	2.5	20	150	1000
.4	3	25	200	1500
.5	4	30	250	2000

Pulse-type water meters, 3"...6" flanged

Max. working temperature 40°C, max. contact load 100 mA, 24 V

Max. flow rate = Q_{max} , nominal flow rate = Q_n


1138/4

Q_{max}/Q_n (m³/h)	Connections in.	Overall length mm	Pulse spacing	
110/55	3" ASA	225 mm (9")	Please call	304439
180/90	4" ASA	251 mm (10")		304442
350/175	6" ASA	298 mm (12")		304443

High Flow Pump Accessories: Pulse-type Water Meters – LPH Scale


Description

Part No.

Pulse-type water meters, for hot water up to 120°C, 3/4"...2" NPT fittings – litre readout

Max. contact load 100 mA, 24 V

Max. flow rate = Q_{max} , nominal flow rate = Q_n



1137/4


Q_{max}/Q_n (m ³ /h)	Connections in.	Overall length w/o unions mm	Pulse spacing	
5/2.5	3/4"	190 mm (7.5")	Please call	304478
10/6	1"	260 mm (10.2")		304482
20/10	1-1/2"	300 mm (11.8")		304484
30/15	2"	270 mm (10.6")		304487

Note: Price includes two screw fittings.

*Please specify pulse rate desired

Pulse-type water meters, for hot water up to 120°C, 3"...6" flanged

as above.



1138/4

Q_{max}/Q_n (m ³ /h)	Connections in.	Overall length mm	Pulse spacing	
100/40	3" ASA	225 mm (9")	Please call	304490
150/60	4" ASA	251 mm (10")		304495
300/150	6" ASA	298 mm (12")		304498

High Flow Pump Accessories: Valve Springs

Description

Part No.

Valve springs

Fig. 1




pk_1_103

You may spring-load the valve balls in the pump suction and/or discharge valves to improve the valve function and increase the repeatability. Particularly recommended when pumping viscous fluids of more than 50 cPs (mPa).

Discharge valve springs may be used instead of an external backpressure valve to improve repeatability when discharging to an open tank. Suction valve springs in excess of 1 psig (0.05 bar) make priming difficult; and in excess of 7 psig (0.5 bar) makes pumping impossible, except where suction pressure exceeds spring pressure.

Fig. 2



pk_1_104

Not recommended for antisiphon protection – use a diaphragm-type backpressure valve for antisiphon protection.

There is no labor charge for installing the valve springs into the pump valves or injection valves.

Pump Model	Spring Pressure Rating psig (bar)		Material of Construction	Part No.
DN 10 valves: Vario models 12017, 12026, 12042, 10025, 09039, 07063 Sigma/1, Hydro	1	(0.05)	Hastelloy C	469114
	7	(0.5)	Hastelloy C	469115
	7	(0.5)	PVDF-coated Hastelloy C	818515
	14	(1.0)	Hastelloy C	469119
	1	(0.05)	302 SS	7469401
DN 15 Valves: Vario models 06047, 05075, 04120 Sigma/1 Sigma/2 models 12050, 12090, 12130 Hydro	1	(0.05)	Hastelloy C	469107
	7	(0.5)	Hastelloy C	469108
	7	(0.5)	PVDF-coated Hastelloy C	818516
	14	(1.0)	Hastelloy C	469116
	1	(0.05)	302 SS	7469404
DN 20 Valves: Meta/Makro models with 3/4" connectors	1	(0.05)	Hastelloy C	469451
	7	(0.5)	Hastelloy C	469409
	7	(0.5)	PVDF-coated Hastelloy C	818517
	14	(1.0)	Hastelloy C	469135
	1	(0.05)	302 SS	7469402
DN 25 Valves: Meta/Makro models with 1" connectors Sigma/2 models 07120, 07220, 04350	1	(0.05)	Hastelloy C	469452
	7	(0.5)	Hastelloy C	469414
	7	(0.5)	PVDF-coated Hastelloy C	818518
	14	(1.0)	Hastelloy C	469136
	1	(0.05)	302 SS	7469403
DN 40 Valves: Meta/Makro models with 1-1/2" connectors	7	(0.5)	Hastelloy C	469104
	7	(0.5)	PVDF-coated Hastelloy C	818519
	14	(1.0)	Hastelloy C	469137
Meta/Makro HK pumps with 1/4" connectors	1	(0.05)	316 SS	469461
Makro HK pumps with 3/8" connectors	1	(0.05)	316 SS	469462

High Flow Pump Accessories: Gaskets

Description	Part No.
-------------	----------

Gaskets

Virgin White Teflon gaskets for PTFE/SS liquid ends.

DN 10	Vario/Hydro/Sigma	483957
DN 15	Sigma/Vario/Hydro	483921
DN 20	Meta/Sigma	483922
DN 25	Meta/Sigma	483923
DN 32	Sigma	7744320
DN 40	Makro	483951

Note: The material make-up of the standard gaskets are teflon with a Viton® center. For applications using chemicals that react negatively with Viton®, the above gaskets are needed.

High Flow Pump Accessories: Special Valve Balls and Diaphragms

Description	Part No.
-------------	----------

Special valve balls

For metering pumps and accessories if standard materials are unsuitable.



11.1 mm dia. for DN 10 (Vario, Sigma, Hydro)

PTFE (1/2" MNPT connection)	7404207
Ceramic (1/2" MNPT connection)	404277
SS (3/8" FNPT connection)	404243



16 mm dia. for DN 15 (Vario, Sigma, Hydro)

PTFE (3/4" MNPT connection)	7404208
Ceramic (3/4" MNPT connection)	404275
SS (1/2" FNPT connection)	404244

pk_1_102

20 mm dia. for valve dia. 3/4" DN 20 (Meta, Makro)

PTFE	404256
Ceramic	404273
SS	404246

25 mm dia. for valve dia. 1" DN 25 (Sigma, Meta, Makro)



PTFE	404257
Ceramic	404274
SS	404247

38.1 mm dia. for valve dia. 1-1/2" DN 40 (Makro)

PTFE	404261
Ceramic	404278
SS	7404260

Pump diaphragms

ProMinent pump diaphragm made from a steel core with Viton® or EPDM facing. Particularly suited for media tending to crystalize, such as silicate.



1047_4_1

Viton® for pump type:

	Max. working pressure	
Vario 12017, 12026, 12042	87 psi (6 bar)	811308
Vario 10025, 09039, 07063	87 psi (6 bar)	811309
Vario 06047, 05075, 04120	87 psi (6 bar)	811310
Meta/Makro 130 liquid end	87 psi (6 bar)	7811470
Meta/Makro 260 liquid end	87 psi (6 bar)	7811471
Sigma/2 12050, 12090, 12130	29 psi (2 bar)	1018953
Sigma/2 07120, 07220, 04350	29 psi (2 bar)	1018984

EPDM for pump type:

	Max. working pressure	
Sigma/2 12050, 12090, 12130	29 psi (2 bar)	1018952
Sigma/2 07120, 07220, 04350	29 psi (2 bar)	1001312