


Specification Sheet:

Date: June 7, 2004
Subject: Sensor Specification
Product: Aquatrac High Pressure Boiler Conductivity sensor

Page : 1 of 1

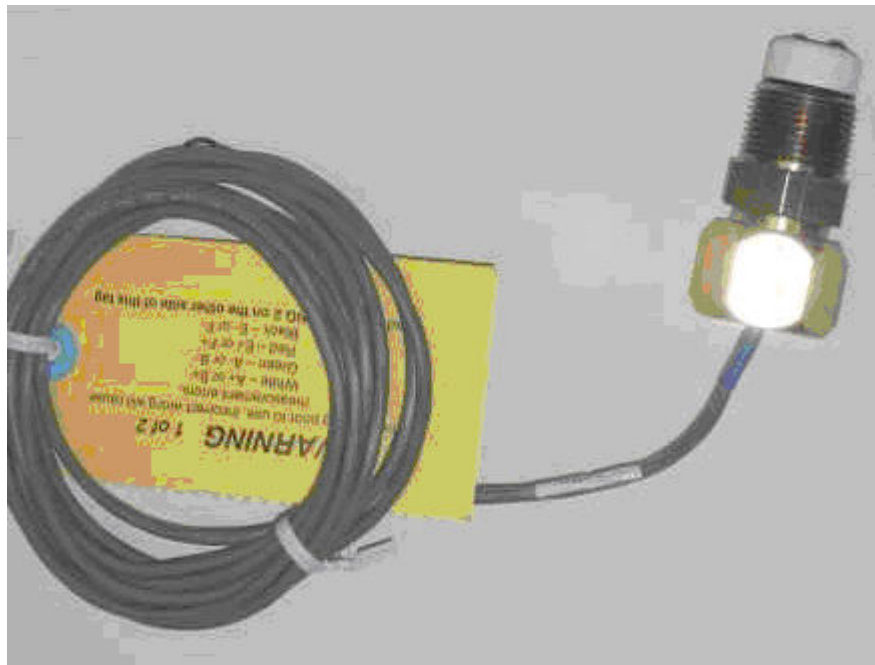

Conductivity Sensor with built-in Temperature Sensor for Compensation. Wires Directly to ALL MultiFLEX Conductivity Inputs and Smart AS/Flex Door Conductivity Inputs.

Connection:	3/4" NPT Steel Tee (Included), Sch. 80
Material:	Glass Filled Teflon, Carbon Steel Electrodes
Max. Pressure:	250 PSI
Max. Temperature:	300 °F (149 °C)
Sensor Length:	2.8"
Electrical Connection:	10', 4 Cond. 24 AWG, Extend up to 250 ft.