




Performance curve VF125

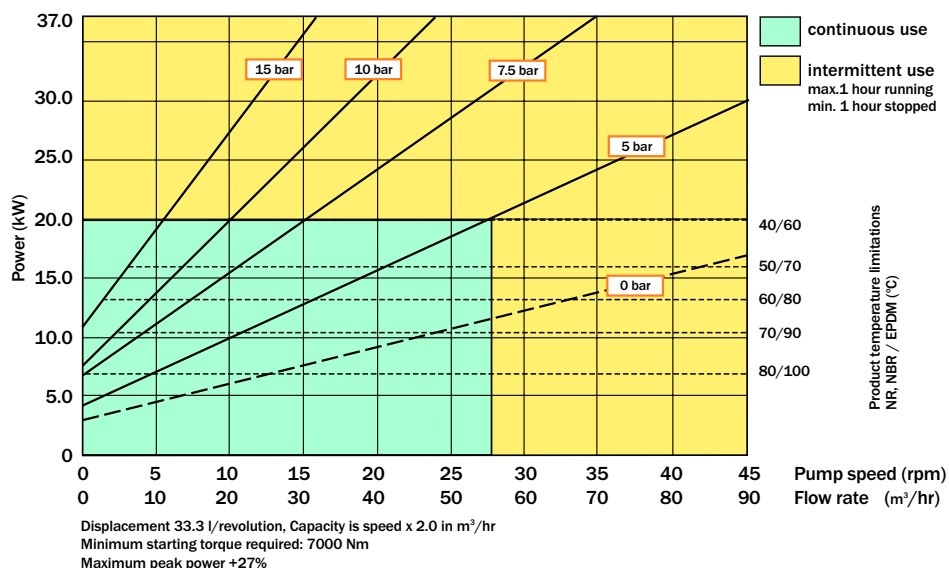

Shimming curve VF125

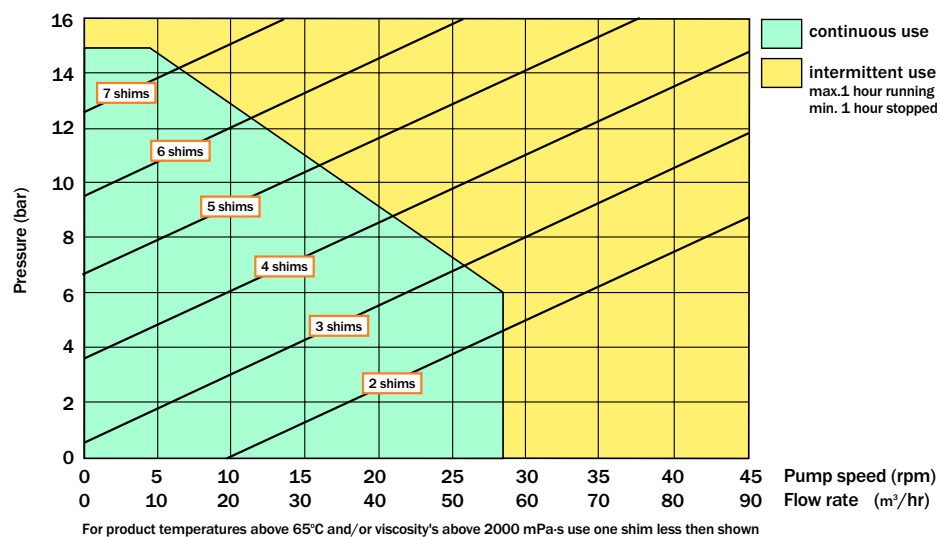

VF125 construction details

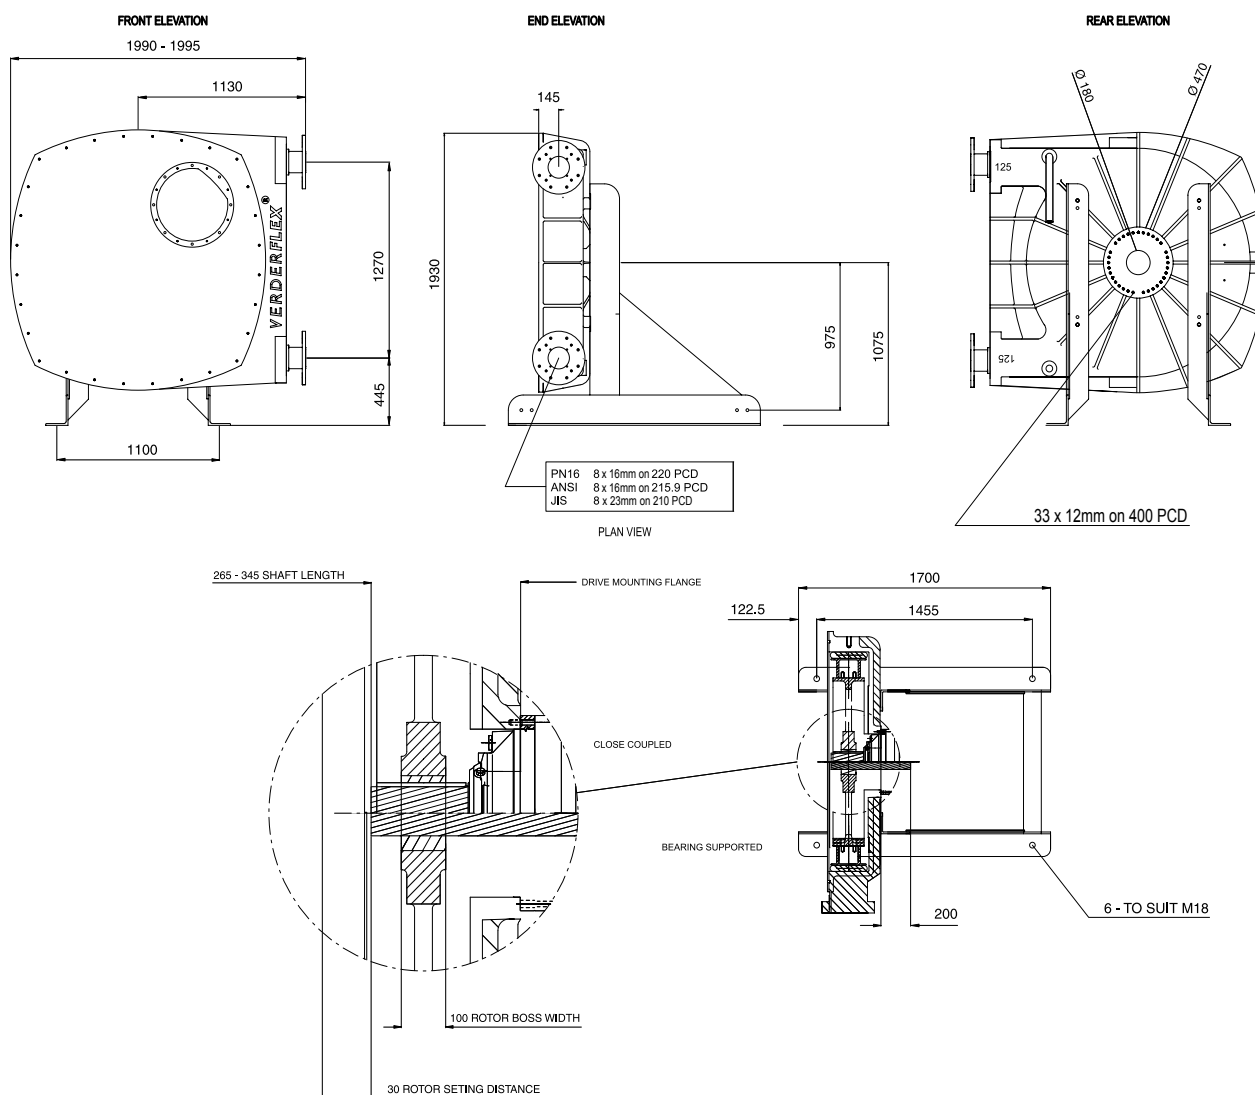

Standard materials of construction

Description	Material	Weight (kg)	Paint Detail
Pump housing	Cast Iron (GG25)	1355	RAL 6018 (green)
Front Cover	Mild Steel (BS.4360 Grade 43A)	140	RAL 7021 (black)
Rotor	Cast Iron (GG25)	277	-
Rotor shoes	Cast Iron (GG25)	80	-
Flanges	Mild Steel (BS EN.10.025 FE430A)	150	-
Inserts	Stainless Steel (316L)	8	-
	PolyPropylene		
	P.V.D.F.		
Baseframe	Carbon Steel	210	RAL 7035 (grey)
Lubricant	Special compound glycerine or silicon oil as option	175	-
Hose	NR, NBR and EPDM	43	-
Close coupled pump unit - 'Flat Pack'		2500	
Long coupled pump unit - 'Flat Pack'		2700	