




Performance curve VF32

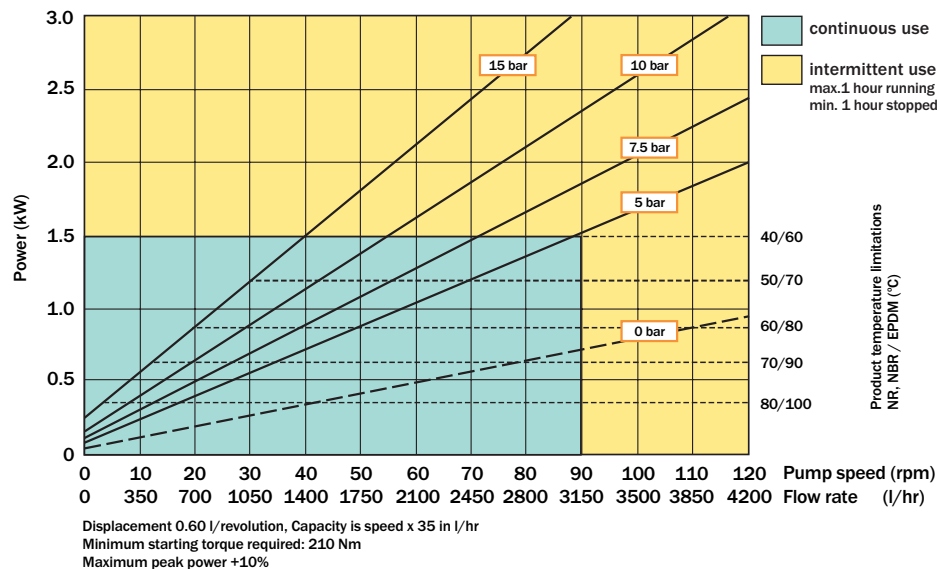

Shimming curve VF32

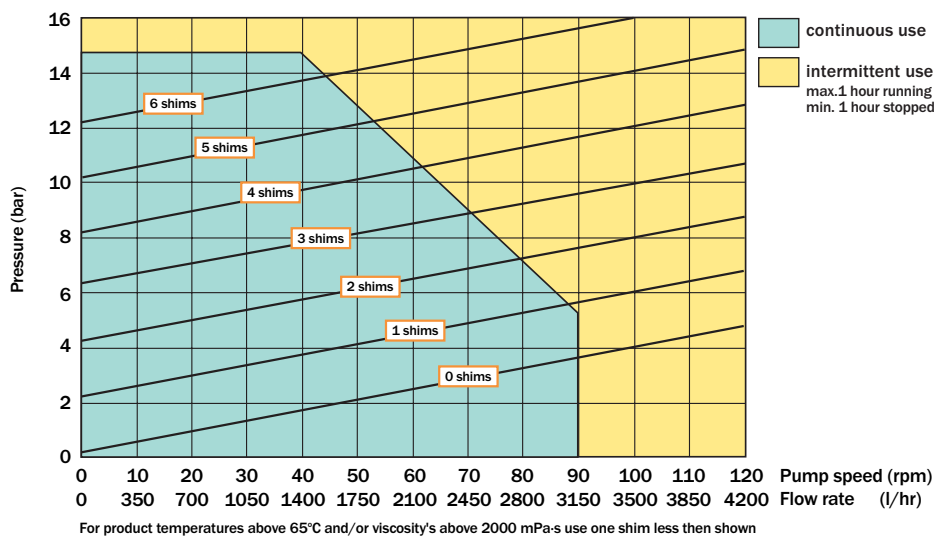

VF32 construction details

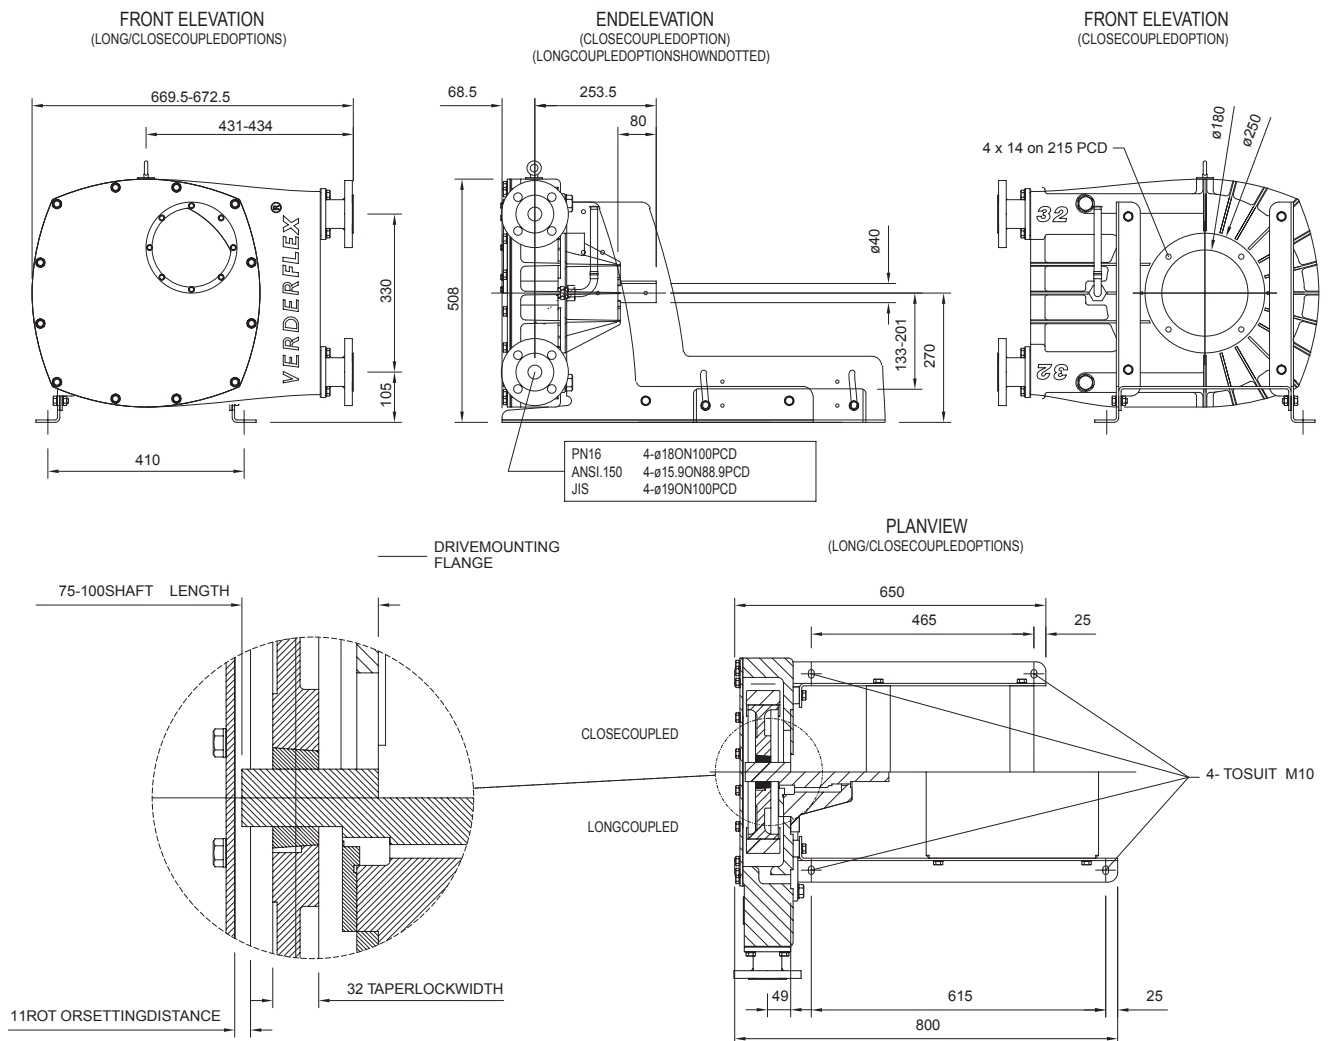

Standard materials of construction

Description	Material	Weight (kg)	Paint Detail
Pump housing	Cast Iron (GG25)	70	RAL 6018 (green)
Front Cover	Mild Steel (BS.4360 Grade 43A)	10	Coat JL421X (black)
Rotor	Cast Iron (GG25)	12	-
Roto shoes	Aluminium (LM4)	2	-
Flanges	Mild Steel (BS EN.10.025 FE430A)	4.5	-
Inserts	Stainless Steel (316L)	0.4	-
	PolyPropylene		
	P.V.D.F.		
Baseframe	Carbon Steel	15	Coat 9414 (silver)
Bearing cartridge	Cast Iron with high tensile steel shaft	15	Coat JL421X (black)
Lubricant	Special compound glycerine or	5	-
	silicon oil as option		
Hose	NR, NBR and EPDM	3.5	-
Close coupled pump unit - 'Flat Pack'		112.4	
Long coupled pump unit - 'Flat Pack'		137.4	