DWG No	REV
7747055-200	0

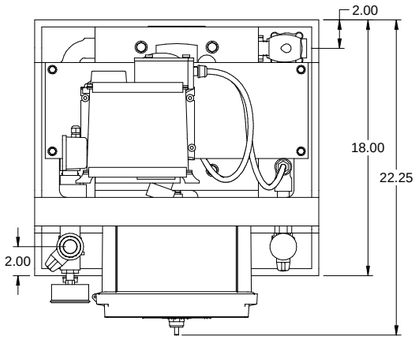

PLAN VIEW

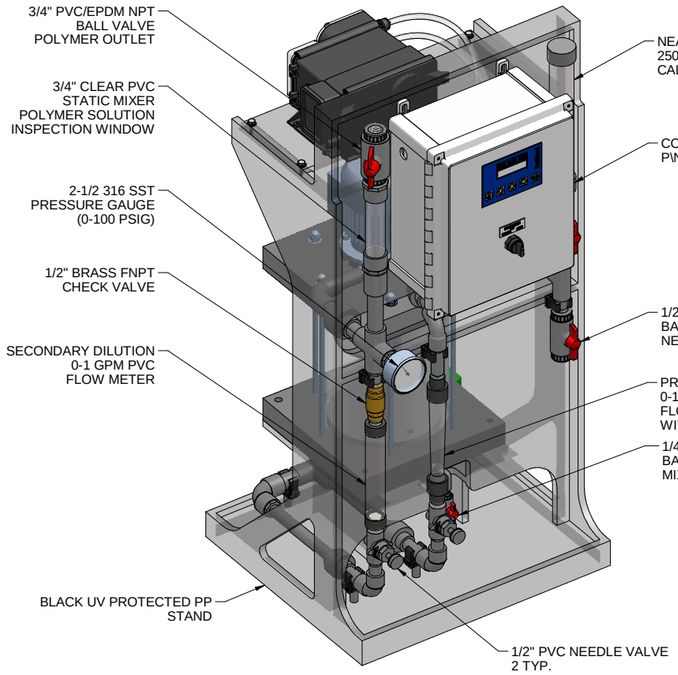

FRONT ISOMETRIC VIEW

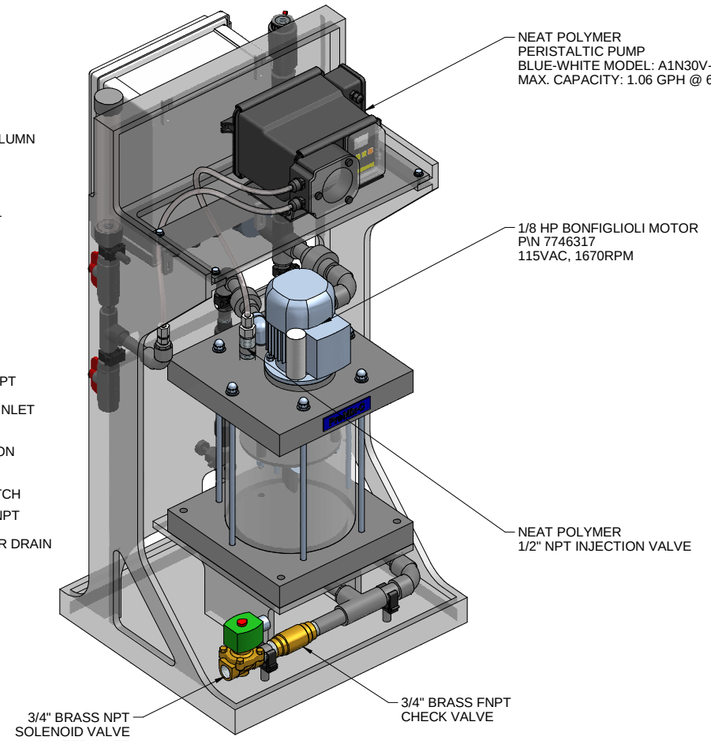

REAR ISOMETRIC VIEW

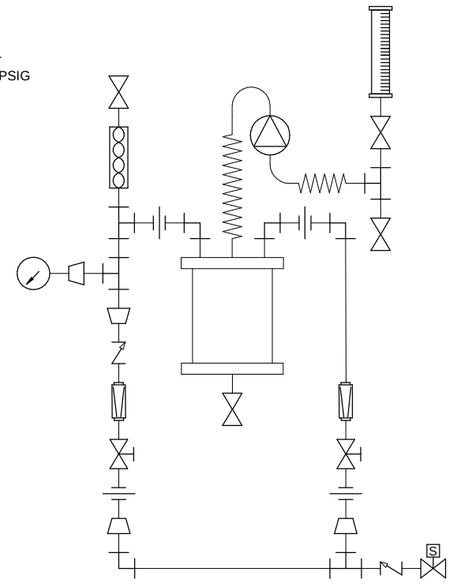

PIPING SCHEMATIC

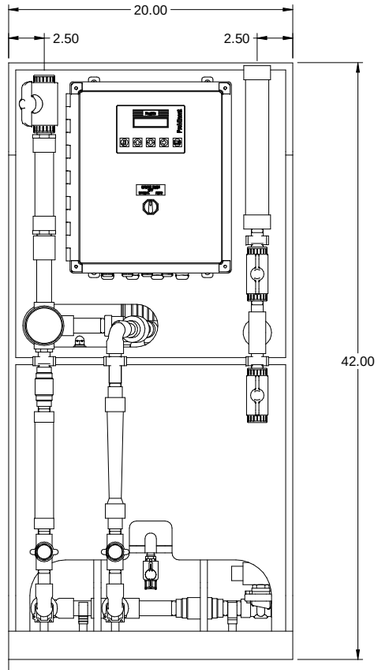

FRONT VIEW

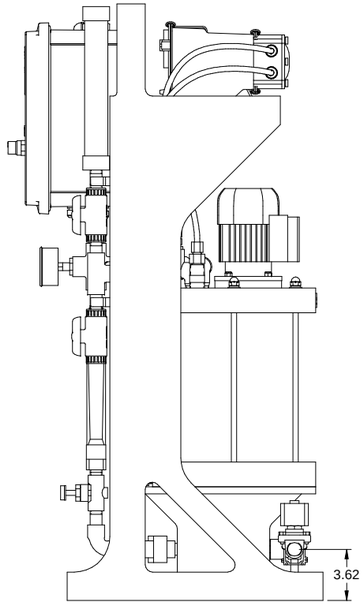

SIDE VIEW

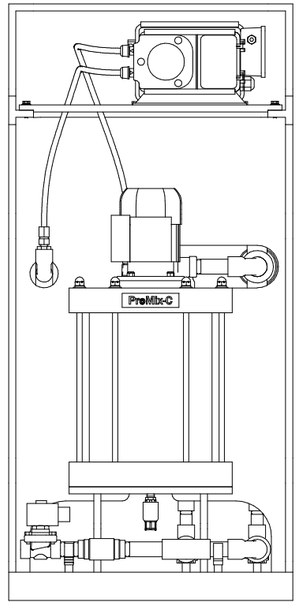

REAR VIEW

NOTES:

1. ALL PIPING AND FITTINGS SHALL BE 1/2" AND 3/4" SCH. 80 PVC SOCKET WELD WITH VITON SEALS UNLESS OTHERWISE NOTED.
2. EMULSION POLYMER BLENDING SYSTEM WITH THREE ZONE PVC MIXING CHAMBER.
3. REQUIRED INCOMING POWER:

   120VAC, 60HZ, 1 PHASE, 15 AMP CURRENT RATING AT 120 VAC
4. ALL DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR REFERENCE ONLY.

REV	DATE	DESCRIPTION	BY	APPD	REVD
0	12/04/12	FIRST ISSUE	GJS		

REVISIONS

CUSTOMER: PROMINENT FLUID CONTROLS INC. (PROMIX C SYSTEM)

JOB No: 7747055 | PURCHASE ORDER No: N\A

TITLE: PROMIX C_60X2-1.06TA SYSTEM SKID GENERAL ARRANGEMENT

THIS DRAWING IS THE PROPERTY OF PROMINENT FLUID CONTROLS INC. AND SHALL NOT BE COPIED OR TRANSFERRED WITHOUT THE WRITTEN CONSENT OF PROMINENT FLUID CONTROLS INC.

ENGINEERS SEAL

ProMinent®
THE PROMINENT GROUP OF COMPANIES

PITTSBURGH, PA USA WWW.PROMINENT.US

PROMINENT FLUID CONTROLS LTD.
490 SOUTHGATE DRIVE.
GUELPH, ONTARIO, CANADA
N1H 6J3
TEL. 519 836 5692 FAX. 519 836 5226

PROMINENT FLUID CONTROLS INC.
RIDC PARK WEST
136 INDUSTRY DRIVE,
PITTSBURGH P.A., USA. 15275
TEL. 412 787 2484 FAX. 412 787 0704

DESIGNED	GJS	APPROVED	KH
DRAWN	GJS	SCALE	N.T.S.
CHECKED	KH	DATE	12/04/12

MAXIMUM TESTING PRESSURE =	150 PSI
MAXIMUM OPERATING PRESSURE =	65 PSI
CHEMICAL SERVICE =	POLYMER

DWG No	REV	PAGE
7747055-200	0	1/1